

Result Summary - Overall

Vertical Brace Connection


Code=AISC 360-10 LRFD


| Result Summary - Overall | geometries & weld limitations = PASS | limit states max ratio = 0.94 | PASS |
|--|---|--------------------------------------|-------------|
| Top Brace - Brace to Gusset | geometries & weld limitations = PASS | limit states max ratio = 0.53 | PASS |
| Top Brace - Gusset to Column | geometries & weld limitations = PASS | limit states max ratio = 0.42 | PASS |
| Top Brace - Gusset to Beam | geometries & weld limitations = PASS | limit states max ratio = 0.48 | PASS |
| Bottom Brace - Brace to Gusset | geometries & weld limitations = PASS | limit states max ratio = 0.69 | PASS |
| Bottom Brace - Gusset to Column | geometries & weld limitations = PASS | limit states max ratio = 0.21 | PASS |
| Bottom Brace - Gusset to Beam | geometries & weld limitations = PASS | limit states max ratio = 0.38 | PASS |
| Beam to Column | geometries & weld limitations = PASS | limit states max ratio = 0.94 | PASS |


Sketch

Vertical Brace Connection

Code=AISC 360-10 LRFD

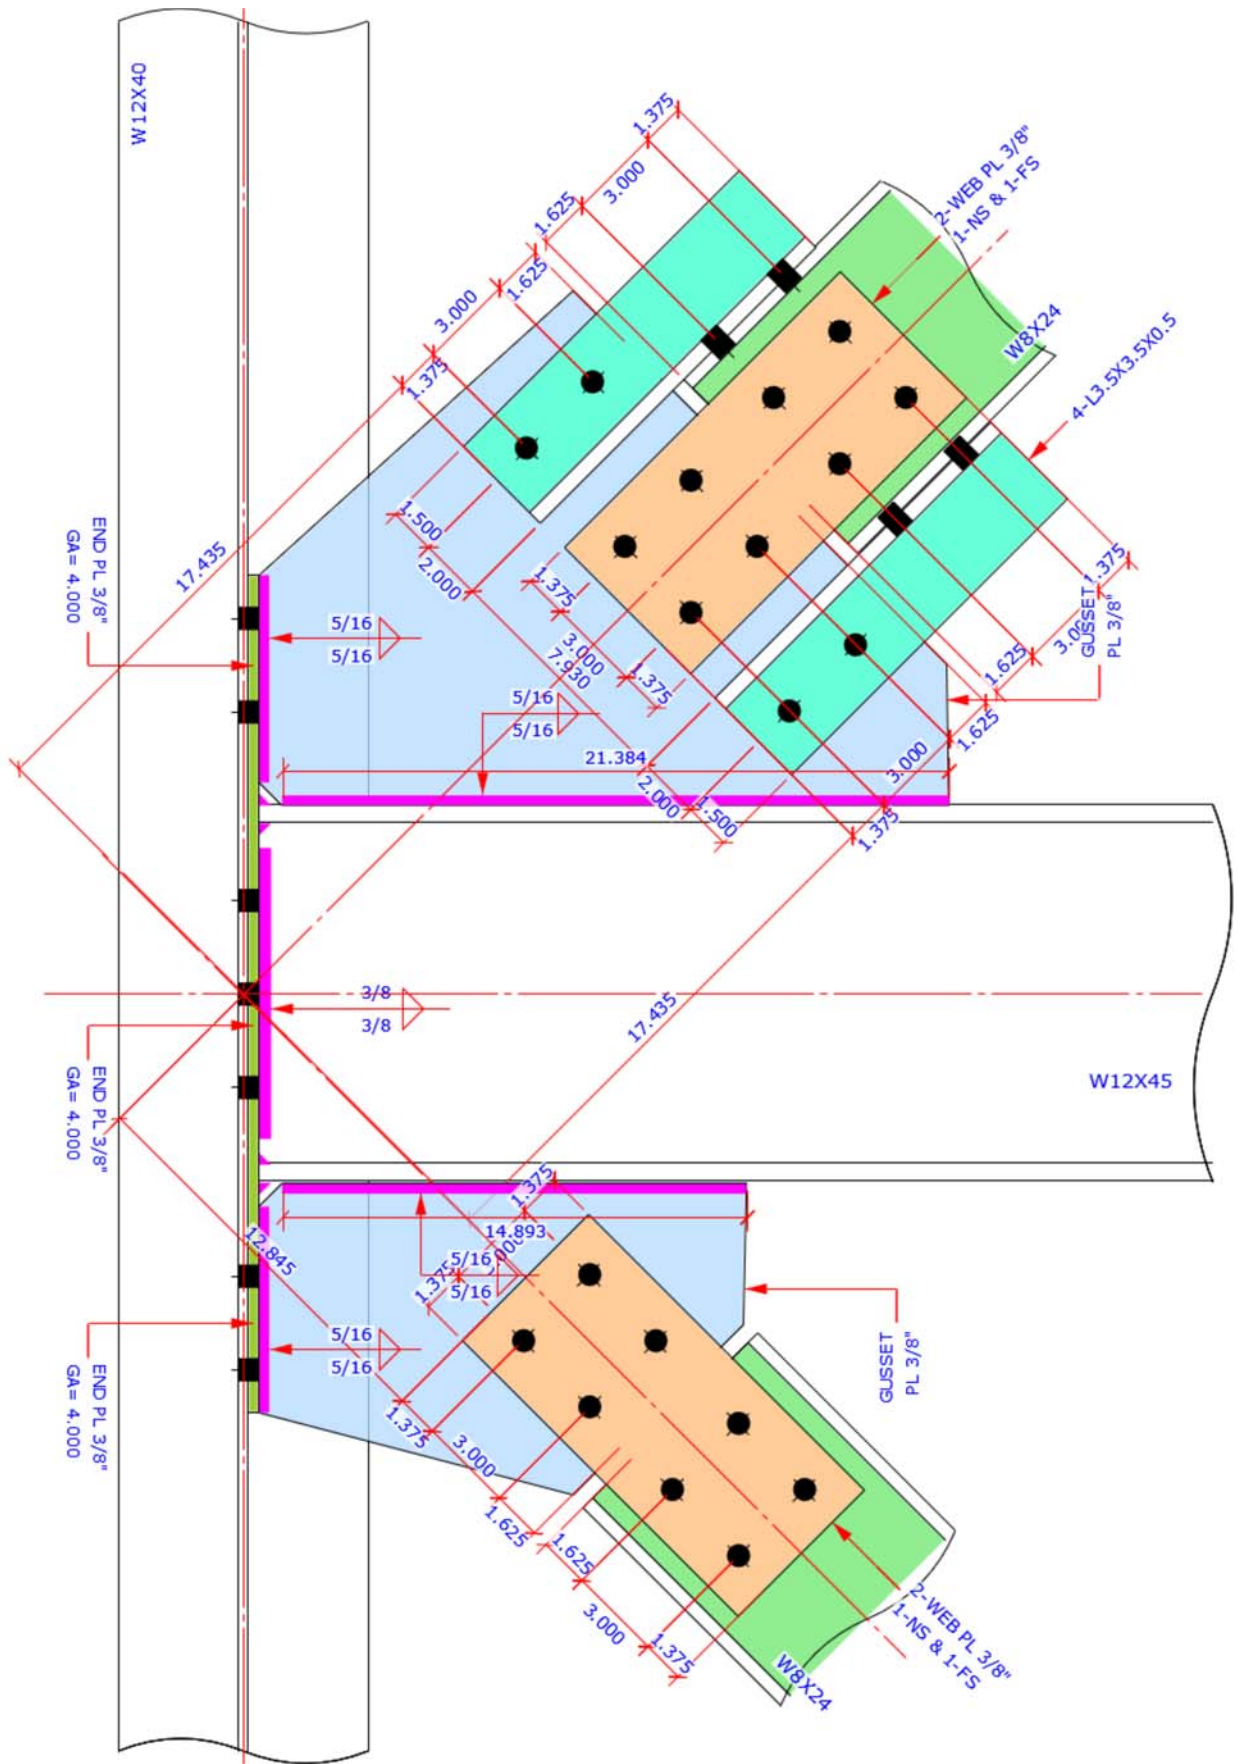


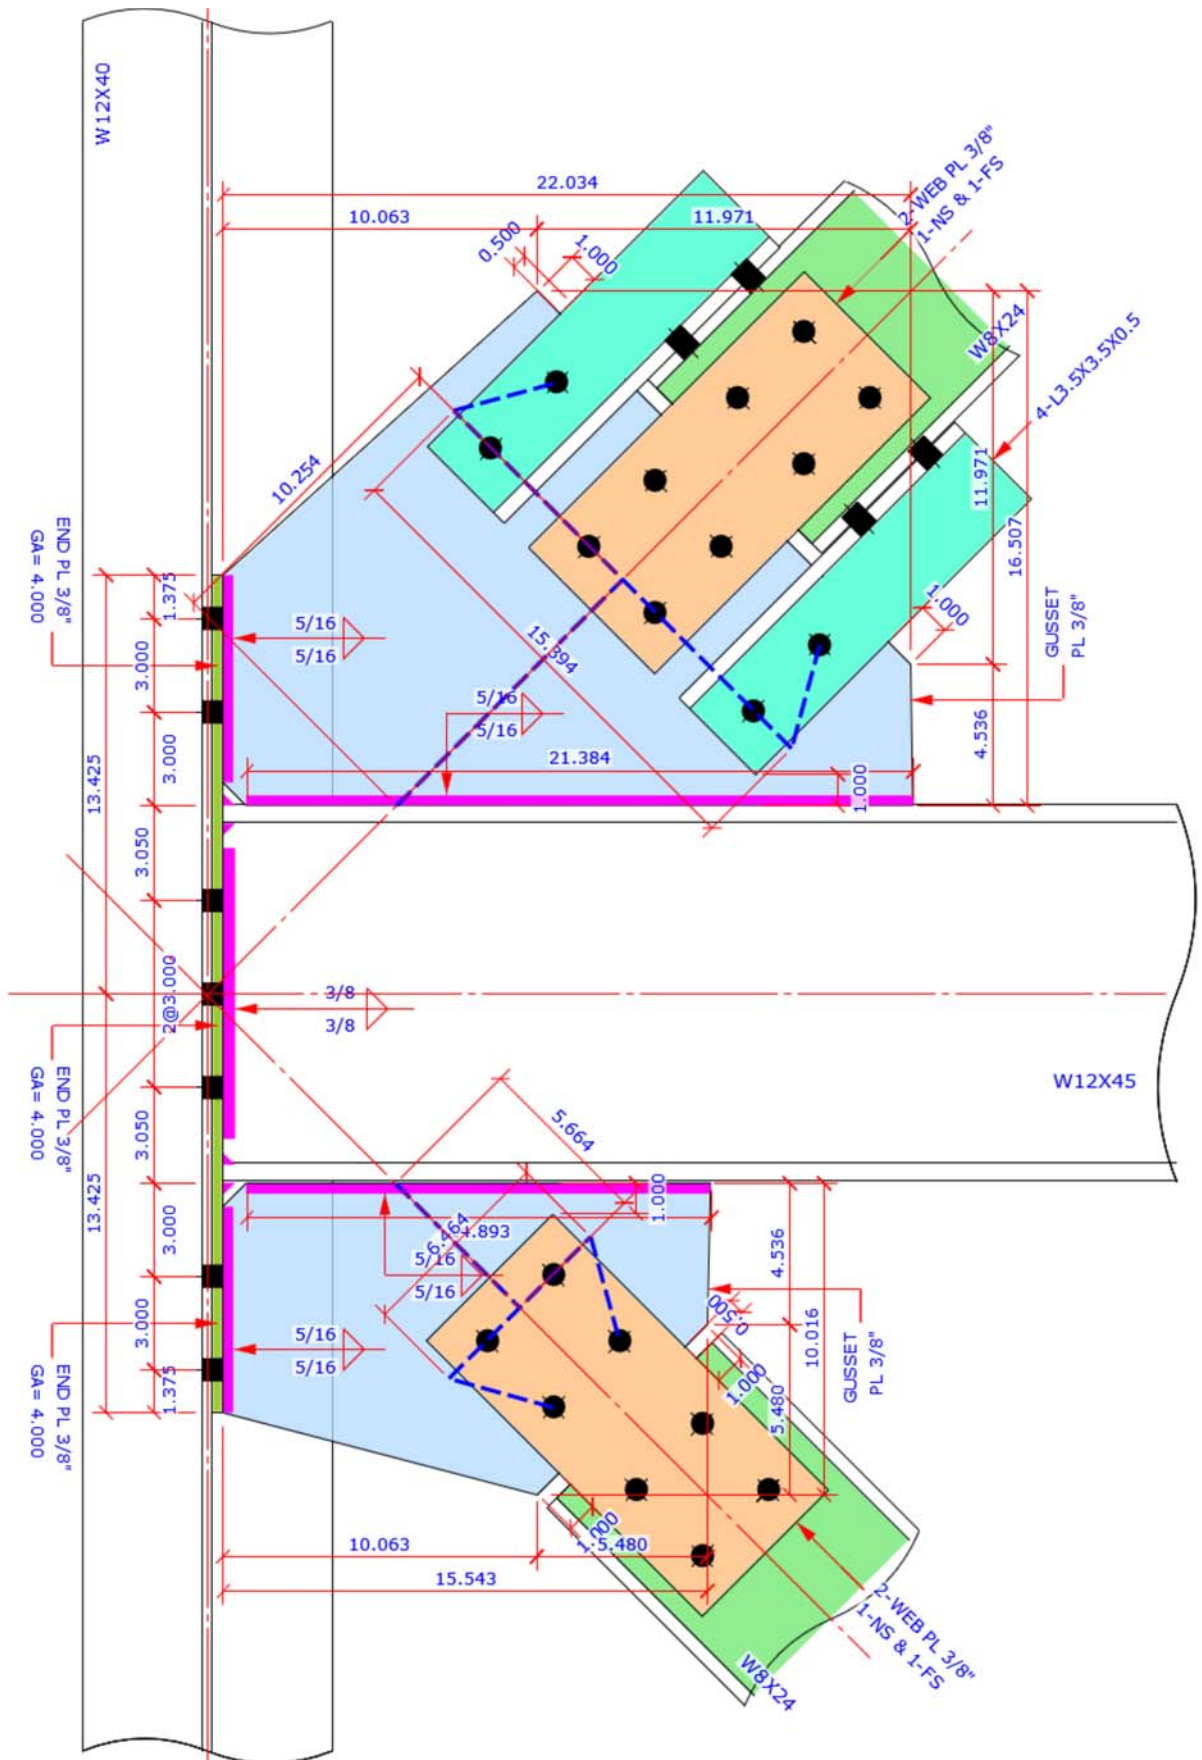

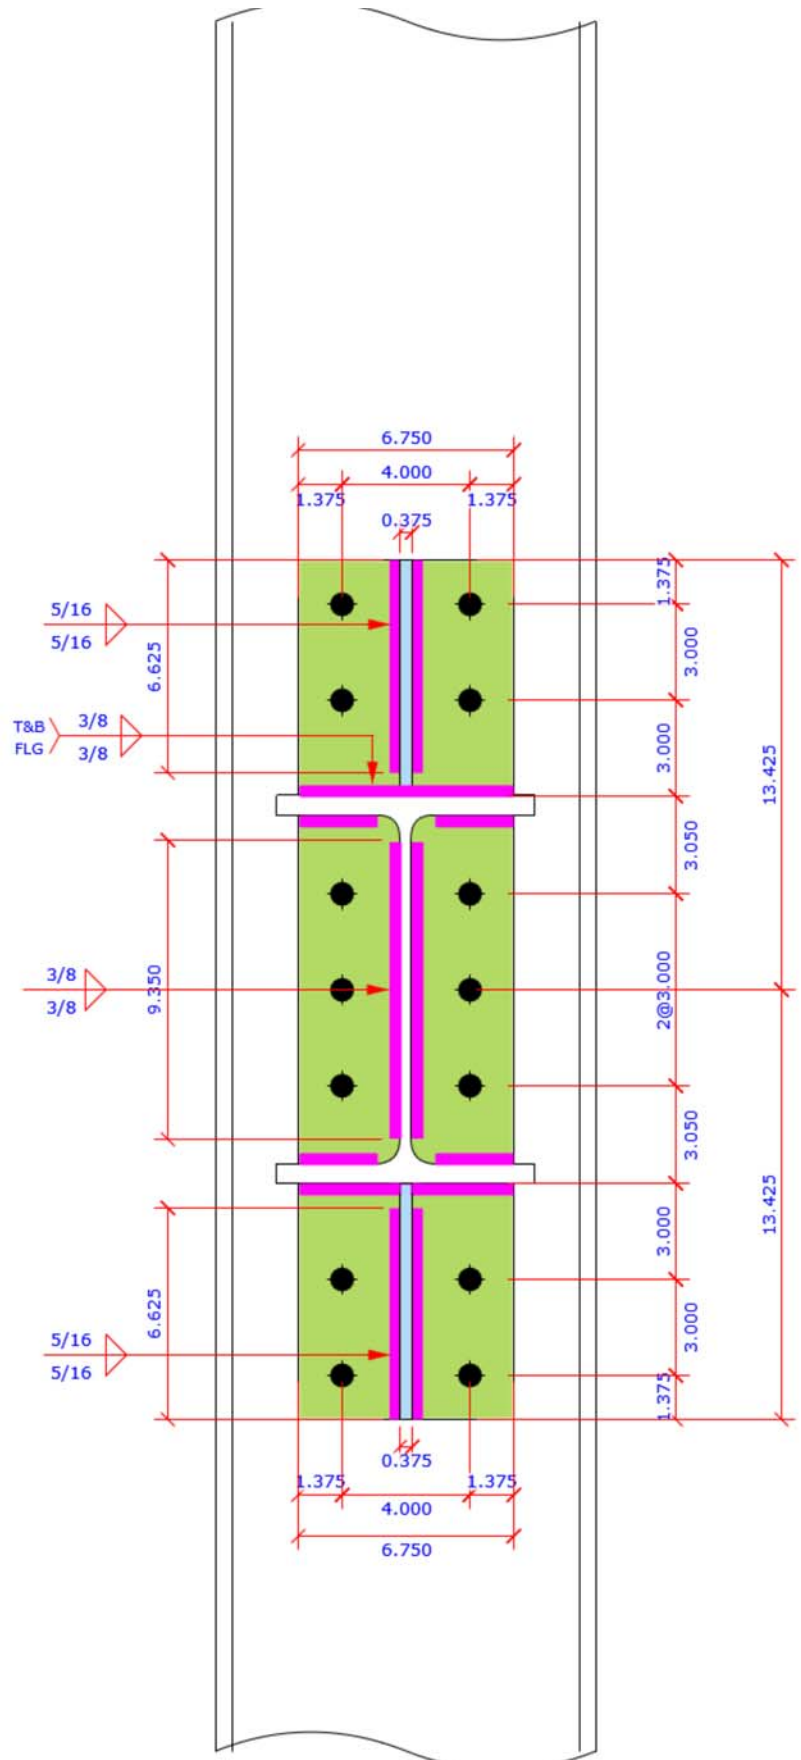

| Members & Components Summary | | |
|------------------------------|---|---|
| Member | Brace Connection | Code=AISC 360-10 LRFD |
| Beam Section | | |
| W12X45 | d = 12.100 [in] | b _f = 8.050 [in] |
| | t _f = 0.575 [in] | t _w = 0.335 [in] |
| | k _{des} = 1.080 [in] | k _{det} = 1.375 [in] |
| | k ₁ = 0.938 [in] | A = 13.100 [in ²] |
| | S _x = 57.70 [in ³] | Z _x = 64.20 [in ³] |
| Steel Grade A992 | F _y = 50.0 [ksi] | F _u = 65.0 [ksi] |
| Column Section | | |
| W12X40 | d = 11.900 [in] | b _f = 8.010 [in] |
| | t _f = 0.515 [in] | t _w = 0.295 [in] |
| | k _{des} = 1.020 [in] | k _{det} = 1.375 [in] |
| | k ₁ = 0.875 [in] | A = 11.700 [in ²] |
| | S _x = 51.50 [in ³] | Z _x = 57.00 [in ³] |
| Steel Grade A992 | F _y = 50.0 [ksi] | F _u = 65.0 [ksi] |

Gusset Plate Interface Forces Calculation

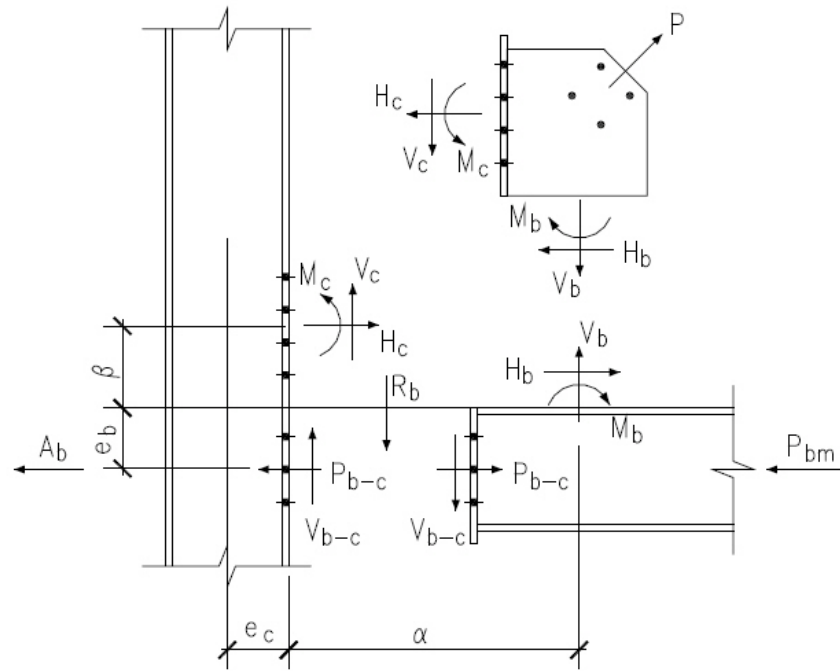

Brace Axial Force Load Case 1

| | | |
|---------------------------------|------------------------------------|----------------------------------|
| Top and bottom brace force | Top $P_{top} = -100.00$ [kips] (T) | Bot $P_{bot} = 50.00$ [kips] (C) |
| Beam end shear & transfer force | Shear $R_b = 25.00$ [kips] | Transfer $A_b = 15.00$ [kips] |

Top Brace Interface Forces

Refer to AISC 14th Page 13-4 and Fig. 13-2 for all charts and definitions of variables and symbols shown in calculation below

| | | |
|--|----------------------|---------------------------------|
| $e_b = 6.050$ [in] | $e_c = 0.148$ [in] | |
| $\alpha = 11.817$ [in] | $\beta = 4.500$ [in] | |
| $\theta = 45.0$ [°] | | |
| $K = e_b \tan \theta - e_c$ | $= 5.903$ [in] | AISC 14 th Eq. 13-16 |
| $D = \tan^2 \theta + \left(\frac{\alpha}{\beta}\right)^2$ | $= 7.896$ | AISC 14 th Eq. 13-24 |
| $K' = \alpha \left(\tan \theta + \frac{\alpha}{\beta}\right)$ | $= 42.848$ | AISC 14 th Eq. 13-23 |
| $\bar{\alpha} = \left[K' \tan \theta + K \left(\frac{\alpha}{\beta}\right)^2 \right] / D$ | $= 10.403$ [in] | AISC 14 th Eq. 13-21 |
| $\bar{\beta} = (K' - K \tan \theta) / D$ | $= 4.500$ [in] | AISC 14 th Eq. 13-22 |
| $r = \left[(e_b + \bar{\beta})^2 + (e_c + \bar{\alpha})^2 \right]^{0.5}$ | $= 14.920$ [in] | AISC 14 th Eq. 13-6 |

| | | | |
|-------------------|-------------------------|--------------------|------------|
| Brace axial force | $P_u =$ from user input | $= -100.00$ [kips] | in tension |
|-------------------|-------------------------|--------------------|------------|

Gusset to Column Interface Forces

| | | | |
|-------------|-----------------------------------|-------------------|---------------------------------|
| Shear force | $V_c = (\bar{\beta} / r) P_u$ | $= -30.16$ [kips] | AISC 14 th Eq. 13-2 |
| Axial force | $H_c = (e_c / r) P_u$ | $= -0.99$ [kips] | AISC 14 th Eq. 13-3 |
| Moment | $M_c = H_c (\beta - \bar{\beta})$ | $= 0.00$ [kip-ft] | AISC 14 th Eq. 13-19 |

Gusset to Beam Interface Forces

| | | | |
|-------------|--------------------------------|-------------------|--------------------------------|
| Shear force | $H_b = (\bar{\alpha} / r) P_u$ | $= -69.72$ [kips] | AISC 14 th Eq. 13-5 |
|-------------|--------------------------------|-------------------|--------------------------------|

Top Brace - Brace to Gusset

Sect=W8X24

 $P_{LC1} = -100.00$ kips (T) $P_{LC2} = 100.00$ kips (C) Code=AISC 360-10 LRFD**Result Summary**geometries & weld limitations = **PASS**limit states max ratio = **0.53** **PASS****Geometry Restriction Checks - Flange Angle to Gusset****PASS****Min Bolt Edge Distance - Flange Angle to Gusset**

| | | | |
|---|---------------|---------------------|----------------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in Flange Angle to Gusset | $L_e =$ | = 1.375 [in] | |
| | | > L_{e-min} | OK |

Min Bolt Spacing - Flange Angle to Gusset

| | | | |
|--|-------------------------|---------------------|----------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in Flange Angle to Gusset | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

Geometry Restriction Checks - Flange Angle to Brace Flange**PASS****Min Bolt Edge Distance - Flange Angle to Brace Flange**

| | | | |
|---|---------------|---------------------|----------------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in Flange Angle to Brace Flange | $L_e =$ | = 1.063 [in] | |
| | | > L_{e-min} | OK |

Min Bolt Spacing - Flange Angle to Brace Flange

| | | | |
|--|-------------------------|---------------------|----------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in Flange Angle to Brace Flange | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

Geometry Restriction Checks - Web Plate to Gusset**PASS****Min Bolt Edge Distance - Web Plate to Gusset**

| | | | |
|--|---------------|---------------------|----------------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in Web Plate to Gusset | $L_e =$ | = 1.375 [in] | |
| | | > L_{e-min} | OK |

Min Bolt Spacing - Web Plate to Gusset

| | | | |
|---|-------------------------|---------------------|----------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in Web Plate to Gusset | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

| Geometry Restriction Checks - Web Plate to Brace Web | | | PASS |
|--|-------------------------|---------------|----------------------------------|
| Min Bolt Edge Distance - Web Plate to Brace Web | | | |
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in Web Plate to Brace Web | $L_e =$ | = 1.375 [in] | |
| | | > L_{e-min} | OK |
| Min Bolt Spacing - Web Plate to Brace Web | | | |
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in Web Plate to Brace Web | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

| Brace Force Load Case 1 | Sect=W8X24 | P = -100.00 kips (T) | ratio = 0.53 | PASS |
|---------------------------------------|--------------------------------|----------------------|--------------|----------------|
| Brace Axial Force Distribution | | | | |
| W shape section | $b_f = 6.500$ [in] | $t_f = 0.400$ [in] | | |
| | $A = 7.080$ [in ²] | | | |
| Brace axial force | $P =$ | = 100.00 [kips] | | in compression |
| Force carried by w shape flange | $P_f = P (b_f t_f / A)$ | = 36.72 [kips] | | |
| Force carried by w shape web | $P_w = P - 2 P_{tf}$ | = 26.55 [kips] | | |

| W Shape Brace - Tensile Yield | ratio = 100.00 / 318.60 = 0.31 | PASS | |
|-------------------------------|--------------------------------|----------------------------|-------------------------------|
| Gross area subject to tension | $A_g =$ | = 7.080 [in ²] | |
| Steel yield strength | $F_y =$ | = 50.0 [ksi] | |
| Tensile force required | $P_u =$ | = 100.00 [kips] | |
| Tensile yielding strength | $R_n = F_y A_g$ | = 354.00 [kips] | AISC 14 th Eq D2-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | AISC 14 th D2 (a) |
| | $\phi R_n =$ | = 318.60 [kips] | AISC 14 th Eq D2-1 |
| | ratio = 0.31 | > P_u | OK |

| W Shape Brace - Tensile Rupture | ratio = 100.00 / 256.00 = 0.39 | PASS | |
|---------------------------------|--------------------------------|----------------------------|----------------------------------|
| Section gross area | $A_g =$ | = 7.080 [in ²] | |
| Tensile net area | $A_n =$ | = 5.251 [in ²] | |
| Shear lag factor | $U =$ | = 1.000 | AISC 14 th Table D3.1 |
| Tensile force required | $P_u =$ | = 100.00 [kips] | |
| Tensile effective net area | $A_e = A_n U$ | = 5.251 [in ²] | |
| Plate tensile strength | $F_u =$ | = 65.0 [ksi] | |
| Tensile rupture strength | $R_n = F_u A_e$ | = 341.33 [kips] | AISC 14 th Eq D2-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | AISC 14 th D2 (b) |
| | $\phi R_n =$ | = 256.00 [kips] | AISC 14 th Eq D2-2 |
| | ratio = 0.39 | > P_u | OK |

| Flange Angle - Tensile Yield | | ratio = 36.72 / 292.50 | = 0.13 | PASS |
|-------------------------------------|-----------------|------------------------|--------------------|-------------------------------|
| Gross area subject to tension | $A_g =$ | = 6.500 | [in ²] | |
| Steel yield strength | $F_y =$ | = 50.0 | [ksi] | |
| Tensile force required | $P_u =$ | = 36.72 | [kips] | |
| Tensile yielding strength | $R_n = F_y A_g$ | = 325.00 | [kips] | AISC 14 th Eq D2-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th D2 (a) |
| | $\phi R_n =$ | = 292.50 | [kips] | AISC 14 th Eq D2-1 |
| | ratio = 0.13 | > P_u | OK | |

| Flange Angle - Tensile Rupture | | ratio = 36.72 / 178.24 | = 0.21 | PASS |
|---------------------------------------|---|--------------------------------|--------------------|----------------------------------|
| Section gross area | $A_g = 2 \text{ L3-1/2X3-1/2X1/2}$ | = 6.500 | [in ²] | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt row | $n_v = 1$ | angle leg $t = 0.500$ | [in] | |
| Tensile net area | $A_n = A_g - n_v d_h t \times 2$ | = 5.625 | [in ²] | |
| No of bolt column | $n_h = 2$ | bolt space $s_h = 3.000$ | [in] | |
| Length of connection | $L = (n_h - 1) s_h$ | = 3.000 | [in] | |
| Eccentricity of connection | $\bar{x} = \text{from sect L3}^{1/2} \times 3^{1/2} \times 1/2$ | = 1.050 | [in] | |
| Shear lag factor | $U = 1 - \bar{x} / L$ | = 0.650 | | AISC 14 th Table D3.1 |
| Tensile force required | $P_u =$ | = 36.72 | [kips] | |
| Tensile effective net area | $A_e = A_n U$ | = 3.656 | [in ²] | |
| Plate tensile strength | $F_u =$ | = 65.0 | [ksi] | |
| Tensile rupture strength | $R_n = F_u A_e$ | = 237.66 | [kips] | AISC 14 th Eq D2-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th D2 (b) |
| | $\phi R_n =$ | = 178.24 | [kips] | AISC 14 th Eq D2-2 |
| | ratio = 0.21 | > P_u | OK | |

| Flange Angle - Brace Side - Bolt Shear | | ratio = 36.72 / 71.57 | = 0.51 | PASS |
|---|---------------------------------|-------------------------|--------------------|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 1$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 36.72 | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 95.43 | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.51 | > V_u | OK | |

| Flange Angle - Brace Side - Bolt Bearing on Angle | | ratio = 36.72 / 71.57 | = 0.51 | PASS |
|--|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | edge distance $L_e = 1.375$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.500$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 73.13 | [kips] | AISC 14 th Eq J3-6b |
| | = 106.64 \leq 73.13 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 0.969 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 47.23 | [kips] | AISC 14 th Eq J3-6b |
| | = 47.23 \leq 73.13 | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 36.72 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.51 | > V_u | OK | |

| Flange Angle - Brace Side - Bolt Bearing on Brace Flange | | ratio = 36.72 / 71.57 | = 0.51 | PASS |
|---|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | [in] | edge distance $L_e = 1.625$ | [in] |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.400$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 58.50 | [kips] | AISC 14 th Eq J3-6b |
| | = 85.31 ≤ 58.50 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 1.219 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 47.53 | [kips] | AISC 14 th Eq J3-6b |
| | = 47.53 ≤ 58.50 | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 36.72 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.51 | > V_u | OK | |

| Flange Angle - Block Shear - 1-Side Strip | | ratio = 18.36 / 70.69 | = 0.26 | PASS |
|--|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Side Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.500$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 1$ | $n_h = 2$ | | |
| Bolt spacing in hor dir | $s_h = 3.000$ [in] | | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.500$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p$ | = 2.188 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p$ | = 1.531 [in ²] | | |
| Net area subject to tension | $A_{nt} = (e_v - 0.5 d_h) t_p$ | = 0.531 [in ²] | | |
| Block shear strength required | $V_u =$ | = 18.36 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min (0.6F_u A_{nv} , 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 94.25 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 70.69 [kips] | | |
| | ratio = 0.26 | > V_u | OK | |

| Brace Flange - Block Shear - 1-Side Strip | | ratio = 18.36 / 50.95 | = 0.36 | PASS |
|--|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Side Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.400$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 1$ | $n_h = 2$ | | |
| Bolt spacing in hor dir | $s_h = 3.000$ [in] | | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.063$ [in] | $e_h = 1.625$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p$ | = 1.850 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p$ | = 1.325 [in ²] | | |
| Net area subject to tension | $A_{nt} = (e_v - 0.5 d_h) t_p$ | = 0.250 [in ²] | | |
| Block shear strength required | $V_u =$ | = 18.36 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min (0.6F_u A_{nv} , 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 67.94 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 50.95 [kips] | | |
| | ratio = 0.36 | > V_u | OK | |

| Flange Angle - Gusset PL Side - Bolt Shear | | ratio = 36.72 / 71.57 | = 0.51 | PASS |
|---|---------------------------------|-------------------------|--------------------|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 2.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | $= 1.000$ | | |
| Required shear strength | $V_u =$ | $= 36.72$ | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | $= 95.43$ | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | $= 71.57$ | [kips] | |
| | ratio = 0.51 | $> V_u$ | OK | |

| Flange Angle - Gusset PL Side - Bolt Bearing on Angle | | ratio = 18.36 / 35.78 | = 0.51 | PASS |
|--|---|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | $= 23.86$ | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ [in] | edge distance $L_e = 1.375$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.500$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | $= 2.188$ | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ $= 106.64 \leq 73.13$ | $= 73.13$ | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | $= 23.86$ | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | $= 0.969$ | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ $= 47.23 \leq 73.13$ | $= 47.23$ | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | $= 23.86$ | [kips] | |
| Number of bolt | interior $n_{in} = 1$ | edge $n_{ed} = 1$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | $= 47.71$ | [kips] | |
| Required shear strength | $V_u =$ | $= 18.36$ | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | $= 35.78$ | [kips] | |
| | ratio = 0.51 | $> V_u$ | OK | |

| Flange Angle - Gusset PL Side - Bolt Bearing on Gusset Plate | | ratio = 36.72 / 69.21 | = 0.53 | PASS |
|---|---|--|-----------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 [kips] | | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ [in] | | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ [in] | edge distance $L_e = 1.625$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate thickness | $t = 0.375$ [in] | | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 [in] | | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ = 79.98 ≤ 54.84 | = 54.84 [kips] | | AISC 14 th Eq J3-6b |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 47.71 [kips] | | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 1.219 [in] | | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ = 44.56 ≤ 54.84 | = 44.56 [kips] | | AISC 14 th Eq J3-6b |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 44.56 [kips] | | |
| Number of bolt | interior $n_{in} = 1$ | edge $n_{ed} = 1$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 92.27 [kips] | | |
| Required shear strength | $V_u =$ | = 36.72 [kips] | | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 69.21 [kips] | | |
| | ratio = 0.53 | > V_u | OK | |

| Web Plate - Tensile Yield | | ratio = 13.28 / 97.03 | = 0.14 | PASS |
|-------------------------------------|--------------------------|------------------------------|-----------|-------------------------------|
| Plate Tensile Yielding Check | | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_g = b_p t_p$ | = 2.156 [in ²] | | |
| Tensile force required | $P_u =$ | = 13.28 [kips] | | |
| Plate tensile yielding strength | $R_n = F_y A_g$ | = 107.81 [kips] | | AISC 14 th Eq J4-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Eq J4-1 |
| | $\phi R_n =$ | = 97.03 [kips] | | |
| | ratio = 0.14 | > P_u | OK | |

| Web Plate - Tensile Rupture | | ratio = 13.28 / 73.13 | = 0.18 | PASS |
|--|---------------------------------|--|-----------|----------------------------------|
| Plate Tensile Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in tension | $A_{nt} = (b_p - n d_h) t_p$ | $= 1.500$ [in ²] | | |
| Tensile force required | $P_u =$ | $= 13.28$ [kips] | | |
| Plate tensile rupture strength | $R_n = F_u A_{nt}$ | $= 97.50$ [kips] | | AISC 14 th Eq J4-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-2 |
| | $\phi R_n =$ | $= 73.13$ [kips] | | AISC 14 th Eq J4-2 |
| | ratio = 0.18 | $> P_u$ | OK | |
| Web Plate - Brace Side - Bolt Shear | | ratio = 26.55 / 143.14 | = 0.19 | PASS |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | $= 1.000$ | | |
| Required shear strength | $V_u =$ | $= 26.55$ [kips] | | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | $= 190.85$ [kips] | | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | $= 143.14$ [kips] | | |
| | ratio = 0.19 | $> V_u$ | OK | |

| Web Plate - Brace Side - Bolt Bearing on Web Plate | | ratio = 13.28 / 71.57 | = 0.19 | PASS |
|---|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | [in] | edge distance $L_e = 1.375$ | [in] |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.375$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 0.969 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 35.42 | [kips] | AISC 14 th Eq J3-6b |
| | = 35.42 ≤ 54.84 | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 13.28 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.19 | > V_u | OK | |

| Web Plate - Brace Side - Bolt Bearing on Brace Web | | ratio = 26.55 / 97.42 | = 0.27 | PASS |
|---|--|-----------------------------|----------------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in] [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | edge distance $L_e = 1.625$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.245$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 52.25 ≤ 35.83 | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 35.83 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 1.219 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 29.11 ≤ 35.83 | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 29.11 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 129.89 | [kips] | |
| Required shear strength | $V_u =$ | = 26.55 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 97.42 | [kips] | |
| | ratio = 0.27 | > V_u | OK | |

| Web Plate - Block Shear - Center Strip | | ratio = 13.28 / 106.03 | = 0.13 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 0.797 [in ²] | | |
| Block shear strength required | $V_u =$ | = 13.28 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 141.38 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 106.03 [kips] | | |
| | ratio = 0.13 | > V_u | OK | |

| Web Plate - Block Shear - 1-Side Strip | | ratio = 13.28 / 89.58 | = 0.15 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Side Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p$ | = 1.641 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p$ | = 1.148 [in ²] | | |
| Net area subject to tension when sheared out by side strip | $A_{nt} = [(n_v - 1)s_v + e_v - ((n_v - 1) + 0.5)d_h] t_p$ | = 1.148 [in ²] | | |
| Block shear strength required | $V_u =$ | = 13.28 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 119.44 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 89.58 [kips] | | |
| | ratio = 0.15 | > V_u | OK | |

| Web Plate - Block Shear - 2-Side Strip | | ratio = 13.28 / 101.46 | = 0.13 | PASS |
|--|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 0.703 [in ²] | | |
| Block shear strength required | $V_u =$ | = 13.28 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 135.28 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 101.46 [kips] | | |
| | ratio = 0.13 | > V_u | OK | |

| Brace Web - Block Shear - Center Strip | | ratio = 26.55 / 72.86 | = 0.36 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.245$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 2.465$ [in] | $e_h = 1.625$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 2.266 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 1.623 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 0.521 [in ²] | | |
| Block shear strength required | $V_u =$ | = 26.55 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 97.14 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 72.86 [kips] | | |
| | ratio = 0.36 | > V_u | OK | |

| Web Plate - Gusset PL Side - Bolt Shear | | ratio = 26.55 / 143.14 | = 0.19 | PASS |
|--|---------------------------------|-------------------------|--------------------|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | $= 1.000$ | | |
| Required shear strength | $V_u =$ | $= 26.55$ | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | $= 190.85$ | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | $= 143.14$ | [kips] | |
| | ratio = 0.19 | $> V_u$ | OK | |

| Web Plate - Gusset PL Side - Bolt Bearing on Web Plate | | ratio = 13.28 / 71.57 | = 0.19 | PASS |
|---|--|----------------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | $= 23.86$ | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ [in] | | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ [in] | edge distance $L_e = 1.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | $= 2.188$ | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | $= 54.84$ | [kips] | AISC 14 th Eq J3-6b |
| | $= 79.98 \leq 54.84$ | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | $= 23.86$ | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | $= 0.969$ | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | $= 35.42$ | [kips] | AISC 14 th Eq J3-6b |
| | $= 35.42 \leq 54.84$ | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | $= 23.86$ | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | $= 95.43$ | [kips] | |
| Required shear strength | $V_u =$ | $= 13.28$ | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | $= 71.57$ | [kips] | |
| | ratio = 0.19 | $> V_u$ | OK | |

| Web Plate - Gusset PL Side - Bolt Bearing on Gusset Plate | | ratio = 26.55 / 138.41 | = 0.19 | PASS |
|---|--|-----------------------------|----------------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in] [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | $d_h = 13/16$ | [in] [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | edge distance $L_e = 1.625$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 47.71 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 1.219 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 44.56 | [kips] | AISC 14 th Eq J3-6b |
| | = 44.56 ≤ 54.84 | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 44.56 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 184.55 | [kips] | |
| Required shear strength | $V_u =$ | = 26.55 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 138.41 | [kips] | |
| | ratio = 0.19 | > V_u | OK | |

| Gusset Plate at Web Plate - Block Shear - Center Strip | | ratio = 26.55 / 111.52 | = 0.24 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 2.465$ [in] | $e_h = 1.625$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.469 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.484 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 0.797 [in ²] | | |
| Block shear strength required | $V_u =$ | = 26.55 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 148.69 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 111.52 [kips] | | |
| | ratio = 0.24 | > V_u | OK | |

| Gusset Plate Overall - Block Shear - Center Strip | | ratio = 100.00 / 242.78 | = 0.41 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 4.0$ | $n_h = 2$ | | |
| Bolt spacing in hor dir | $s_h = 3.000$ [in] | edge dist $e_h = 1.625$ [in] | | |
| Width of block shear strip | $W_{bs} = 11.930$ [in] | | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.469 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.484 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = [W_{bs} - (n_v - 1) d_h] t_p$ | = 3.489 [in ²] | | |
| Block shear strength required | $V_u =$ | = 100.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 323.70 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 242.78 [kips] | | |
| | ratio = 0.41 | > V_u | OK | |

| Gusset Plate - Tensile Yield (Whitmore) | | ratio = 100.00 / 259.77 = 0.38 | PASS |
|--|---------------------------|---------------------------------------|-------------------------------|
| Plate Tensile Yielding Check | | | |
| Plate size | width $b_p = 15.394$ [in] | thickness $t_p = 0.375$ [in] | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | |
| Plate gross area in shear | $A_g = b_p t_p$ | = 5.773 [in ²] | |
| Tensile force required | $P_u =$ | = 100.00 [kips] | |
| Plate tensile yielding strength | $R_n = F_y A_g$ | = 288.64 [kips] | AISC 14 th Eq J4-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | AISC 14 th Eq J4-1 |
| | $\phi R_n =$ | = 259.77 [kips] | |
| | ratio = 0.38 | > P_u | OK |

| Gusset Plate - Tensile Rupture (Whitmore) | | ratio = 100.00 / 217.44 = 0.46 | PASS |
|--|------------------------------|---------------------------------------|-------------------------------|
| Plate Tensile Rupture Check | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | AISC 14 th B4.3b |
| Number of bolt | $n = 4$ | | |
| Plate size | width $b_p = 15.394$ [in] | thickness $t_p = 0.375$ [in] | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | |
| Plate net area in tension | $A_{nt} = (b_p - n d_h) t_p$ | = 4.460 [in ²] | |
| Tensile force required | $P_u =$ | = 100.00 [kips] | |
| Plate tensile rupture strength | $R_n = F_u A_{nt}$ | = 289.92 [kips] | AISC 14 th Eq J4-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | AISC 14 th Eq J4-2 |
| | $\phi R_n =$ | = 217.44 [kips] | AISC 14 th Eq J4-2 |
| | ratio = 0.46 | > P_u | OK |

| Brace Force Load Case 2 | | Sect=W8X24 | P = 100.00 kips (C) | ratio = 0.51 | PASS |
|---------------------------------------|--------------------------------|------------|-----------------------|---------------------|----------------|
| Brace Axial Force Distribution | | | | | |
| W shape section | $b_f = 6.500$ [in] | | $t_f = 0.400$ [in] | | |
| | $A = 7.080$ [in ²] | | | | |
| Brace axial force | $P =$ | | = 100.00 [kips] | | in compression |
| Force carried by w shape flange | $P_f = P (b_f t_f / A)$ | | = 36.72 [kips] | | |
| Force carried by w shape web | $P_w = P - 2 P_{tf}$ | | = 26.55 [kips] | | |

| Flange Angle - Brace Side - Bolt Shear | | ratio = 36.72 / 71.57 = 0.51 | PASS |
|---|---------------------------------|--|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 1$ | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | |
| Required shear strength | $V_u =$ | = 36.72 [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 95.43 [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 71.57 [kips] | |
| | ratio = 0.51 | > V_u | OK |

| Flange Angle - Brace Side - Bolt Bearing on Angle | | ratio = 36.72 / 71.57 | = 0.51 | PASS |
|--|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | [in] | | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.500$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 73.13 | [kips] | AISC 14 th Eq J3-6b |
| | = 106.64 \leq 73.13 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 36.72 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.51 | > V_u | OK | |

| Flange Angle - Brace Side - Bolt Bearing on Brace Flange | | ratio = 36.72 / 71.57 | = 0.51 | PASS |
|--|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.400$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 58.50 | [kips] | AISC 14 th Eq J3-6b |
| | = 85.31 ≤ 58.50 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 36.72 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.51 | > V_u | | OK |
| Flange Angle - Gusset PL Side - Bolt Shear | | | | |
| | | ratio = 36.72 / 71.57 | = 0.51 | PASS |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 2.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 36.72 | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 95.43 | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.51 | > V_u | | OK |

| Flange Angle - Gusset PL Side - Bolt Bearing on Angle | | ratio = 18.36 / 35.78 | = 0.51 | PASS |
|---|--|-----------------------|----------------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in] [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | $d_h = 13/16$ | [in] [in] | AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.500$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 73.13 | [kips] | AISC 14 th Eq J3-6b |
| | = 106.64 \leq 73.13 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | | | | |
| | interior $n_{in} = 2$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 47.71 | [kips] | |
| Required shear strength | $V_u =$ | = 18.36 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 35.78 | [kips] | |
| | ratio = 0.51 | > V_u | | OK |

| Flange Angle - Gusset PL Side - Bolt Bearing on Gusset Plate | | ratio = 36.72 / 71.57 | = 0.51 | PASS |
|---|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 47.71 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 36.72 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.51 | > V_u | OK | |

| Web Plate - Brace Side - Bolt Shear | | ratio = 26.55 / 143.14 | = 0.19 | PASS |
|--|---------------------------------|-------------------------|--------------------|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 26.55 | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 190.85 | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 143.14 | [kips] | |
| | ratio = 0.19 | > V_u | OK | |

| Web Plate - Brace Side - Bolt Bearing on Web Plate | | ratio = 13.28 / 71.57 | = 0.19 | PASS |
|---|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | [in] | edge distance $L_e = 1.375$ | [in] |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.375$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 0.969 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 35.42 | [kips] | AISC 14 th Eq J3-6b |
| | = 35.42 ≤ 54.84 | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 13.28 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.19 | > V_u | OK | |

| Web Plate - Brace Side - Bolt Bearing on Brace Web | | ratio = 26.55 / 107.49 | = 0.25 | PASS |
|---|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.245$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | | | AISC 14 th Eq J3-6b |
| | = 52.25 ≤ 35.83 | = 35.83 | [kips] | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 35.83 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 143.33 | [kips] | |
| Required shear strength | $V_u =$ | = 26.55 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 107.49 | [kips] | |
| | ratio = 0.25 | > V_u | OK | |
| Web Plate - Gusset PL Side - Bolt Shear | | | | |
| | | ratio = 26.55 / 143.14 | = 0.19 | PASS |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 26.55 | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 190.85 | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 143.14 | [kips] | |
| | ratio = 0.19 | > V_u | OK | |

| Web Plate - Gusset PL Side - Bolt Bearing on Web Plate | | ratio = 13.28 / 71.57 | = 0.19 | PASS |
|--|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | [in] | | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.375$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 13.28 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.19 | > V_u | | OK |

| Web Plate - Gusset PL Side - Bolt Bearing on Gusset Plate | | ratio = 26.55 / 143.14 | = 0.19 | PASS |
|--|--|-----------------------------|----------------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in] [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 47.71 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 190.85 | [kips] | |
| Required shear strength | $V_u =$ | = 26.55 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 143.14 | [kips] | |
| | ratio = 0.19 | > V_u | OK | |

| Web Plate - Compression Buckling | | ratio = 13.28 / 73.02 | = 0.18 | PASS |
|----------------------------------|---|------------------------------|--------|--------------------------------|
| Plate Compression Check | | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| | $F_y = 50.0$ [ksi] | $E = 29000$ [ksi] | | |
| Plate gross area in compression | $A_g = b_p t_p$ | $= 2.156$ [in ²] | | |
| Plate radius of gyration | $r = t_p / \sqrt{12}$ | $= 0.108$ [in] | | |
| Plate effective length factor | $K =$ | $= 1.00$ | | |
| Plate unbraced length | $L_u =$ | $= 6.750$ [in] | | |
| Plate slenderness | $KL/r = 1.00 \times L_u / r$ | $= 62.35$ | | |
| | when $\frac{KL}{r} > 25$, use Chapter E | | | AISC 14 th J4.4 (b) |
| Elastic buckling stress | $F_e = \frac{\pi^2 E}{(KL/r)^2}$ | $= 73.62$ [ksi] | | AISC 14 th Eq E3-4 |
| | when $\frac{KL}{r} \leq 4.71 \left(\frac{E}{F_y} \right)^{0.5} = 113.43$ | | | AISC 14 th E3 (a) |
| Critical stress | $F_{cr} = 0.658^{(F_y/F_e)} F_y$ | $= 37.63$ [ksi] | | AISC 14 th Eq E3-2 |
| Plate compression required | $P_u =$ | $= 13.28$ [kips] | | |
| Plate compression provided | $R_n = F_{cr} \times A_g$ | $= 81.13$ [kips] | | AISC 14 th Eq E3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th E1 |
| | $\phi R_n =$ | $= 73.02$ [kips] | | |
| | ratio = 0.18 | $> P_u$ | | OK |

| Gusset Plate - Compression (Whitmore) | | ratio = 100.00 / 220.48 = 0.45 | PASS |
|--|---|---|--------------------------------|
| Plate Compression Check | | | |
| Plate size | width $b_p = 15.394$ [in] $F_y = 50.0$ [ksi] | thickness $t_p = 0.375$ [in] $E = 29000$ [ksi] | |
| Plate gross area in compression | $A_g = b_p t_p$ | $= 5.773$ [in ²] | |
| Plate radius of gyration | $r = t_p / \sqrt{12}$ | $= 0.108$ [in] | |
| Plate effective length factor | $K =$ | $= 0.50$ | |
| Plate unbraced length | $L_u =$ | $= 10.254$ [in] | |
| Plate slenderness | $KL/r = 0.50 \times L_u / r$ | $= 47.36$ | |
| | when $\frac{KL}{r} > 25$, use Chapter E | | AISC 14 th J4.4 (b) |
| Elastic buckling stress | $F_e = \frac{\pi^2 E}{(KL/r)^2}$ | $= 127.60$ [ksi] | AISC 14 th Eq E3-4 |
| | when $\frac{KL}{r} \leq 4.71 \left(\frac{E}{F_y} \right)^{0.5} = 113.43$ | | AISC 14 th E3 (a) |
| Critical stress | $F_{cr} = 0.658^{(F_y/F_e)} F_y$ | $= 42.44$ [ksi] | AISC 14 th Eq E3-2 |
| Plate compression required | $P_u =$ | $= 100.00$ [kips] | |
| Plate compression provided | $R_n = F_{cr} \times A_g$ | $= 244.98$ [kips] | AISC 14 th Eq E3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.90$ | | AISC 14 th E1 |
| | $\phi R_n =$ | $= 220.48$ [kips] | |
| | ratio = 0.45 | $> P_u$ | OK |

Top Brace - Gusset to Column

End Plate Connection

Code=AISC 360-10 LRFD

Result Summarygeometries & weld limitations = **PASS**limit states max ratio = **0.42** **PASS****Geometry Restriction Checks - End Plate to Column Web****PASS****Min Bolt Edge Distance - End Plate to Column Web**

| | | | |
|--|---------------|---------------------|----------------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in End Plate to Column Web | $L_e =$ | = 1.375 [in] | |
| | | > L_{e-min} | OK |

Min Bolt Spacing - End Plate to Column Web

| | | | |
|---|-------------------------|---------------------|----------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in End Plate to Column Web | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

Weld Limitation Checks - Gusset Plate to End Plate**PASS****Min Fillet Weld Size**

| | | | |
|-------------------------------|-------------|---------------------|----------------------------------|
| Thinner part joined thickness | $t =$ | = 0.375 [in] | |
| Min fillet weld size allowed | $w_{min} =$ | = 0.188 [in] | AISC 14 th Table J2.4 |
| Fillet weld size provided | $w =$ | = 0.313 [in] | |
| | | > w_{min} | OK |

Min Fillet Weld Length

| | | | |
|--------------------------------|------------------------|---------------------|-----------------------------|
| Fillet weld size provided | $w =$ | = 0.313 [in] | |
| Min fillet weld length allowed | $L_{min} = 4 \times w$ | = 1.250 [in] | AISC 14 th J2.2b |
| Min fillet weld length | $L =$ | = 6.625 [in] | |
| | | > L_{min} | OK |

Brace Force Load Case 1Gusset plate $t=0.375$

P = -100.00 kips (T)

ratio = **0.42****PASS****Gusset Plate - Shear Yielding**

ratio = 30.16 / 74.53

= **0.40****PASS****Plate Shear Yielding Check**

| | | | |
|-------------------------------|--------------------------|------------------------------|-------------------------------|
| Plate size | width $b_p = 6.625$ [in] | thickness $t_p = 0.375$ [in] | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.484 [in ²] | |
| Shear force required | $V_u =$ | = 30.16 [kips] | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 74.53 [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 74.53 [kips] | |
| | ratio = 0.40 | > V_u | OK |

| Gusset Plate - Shear Rupture | | ratio = 30.16 / 72.67 | = 0.42 | PASS |
|-------------------------------------|--------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Plate size | width $b_p = 6.625$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = b_p t_p$ | = 2.484 [in ²] | | |
| Shear force in demand | $V_u =$ | = 30.16 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 96.89 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 72.67 [kips] | | |
| | ratio = 0.42 | > V_u | | OK |

| End Plate - Shear Yield | | ratio = 15.08 / 64.69 | = 0.23 | PASS |
|-----------------------------------|--------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.156 [in ²] | | |
| Shear force required | $V_u =$ | = 15.08 [kips] | | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 64.69 [kips] | | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 64.69 [kips] | | |
| | ratio = 0.23 | > V_u | | OK |

| End Plate - Shear Rupture | | ratio = 15.08 / 43.88 | = 0.34 | PASS |
|----------------------------------|------------------------------|--------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = (b_p - n d_h) t_p$ | = 1.500 [in ²] | | |
| Shear force required | $V_u =$ | = 15.08 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 58.50 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 43.88 [kips] | | |
| | ratio = 0.34 | > V_u | | OK |

| End Plate - Block Shear - Center Strip | | ratio = 30.16 / 124.31 | = 0.24 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 1.172 [in ²] | | |
| Block shear strength required | $V_u =$ | = 30.16 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 165.75 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 124.31 [kips] | | |
| | ratio = 0.24 | > V_u | OK | |

| End Plate - Block Shear - 2-Side Strip | | ratio = 30.16 / 101.46 | = 0.30 | PASS |
|--|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 0.703 [in ²] | | |
| Block shear strength required | $V_u =$ | = 30.16 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 135.28 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 101.46 [kips] | | |
| | ratio = 0.30 | > V_u | OK | |

| End Plate - Bolt Bearing on End Plate | | ratio = 30.16 / 71.57 | = 0.42 | PASS |
|---|---|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | edge distance $L_e = 1.375$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ = 79.98 ≤ 54.84 | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 0.969 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ = 35.42 ≤ 54.84 | = 35.42 | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 30.16 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.42 | > V_u | OK | |

| End Plate / Column - Bolt Shear | | ratio = 30.16 / 71.57 | = 0.42 | PASS |
|--|---------------------------------|-----------------------|--------------------|----------------------------------|
| Bolt group forces | shear $V = 30.16$ | axial $P = 0.99$ | [kips] | |
| Bolt shear stress | grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 1$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 30.16 | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 95.43 | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.42 | > V_u | OK | |

| End Plate / Column - Bolt Bearing on Column | | ratio = 30.16 / 71.57 | = 0.42 | PASS |
|---|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | [in] | | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.295$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 43.14 | [kips] | AISC 14 th Eq J3-6b |
| | = 62.92 ≤ 43.14 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 30.16 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.42 | > V_u | | OK |

| Bolt Tensile Prying Action on End Plate | | ratio = 0.25 / 7.06 | = 0.04 | PASS |
|---|---|-----------------------------|--------------------|----------------------------------|
| Bolt group forces | shear V = 30.16 [kips] | axial P = -0.99 | [kips] | |
| Single Bolt Tensile Capacity Without Considering Prying | | | | |
| Bolt grade | grade = A325-N | | | |
| Nominal tensile/shear stress | $F_{nt} = 90.0$ [ksi] | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Bolt group shear force | shear V = 30.16 [kips] | no of bolt n = 4 | | |
| Shear stress required | $f_{rv} = V / (n A_b)$ | = 17.07 | [ksi] | |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3.7 |
| Modified nominal tensile stress | $F'_{nt} = 1.3 F_{nt} - \frac{F_{nt}}{\phi F_{nv}} f_{rv} \leq F_{nt}$ | = 79.07 | [ksi] | AISC 14 th Eq J3-3a |
| Bolt nominal tensile strength | $r_n = F'_{nt} A_b$ | = 34.93 | [kips] | AISC 14 th Eq J3-1 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3.6 |
| Single bolt tensile capacity | $\phi r_n =$ | = 26.20 | [kips] | |
| Single Bolt Tensile Capacity After Considering Prying | | | | |
| End plate | width w = 6.750 [in] | bolt gage g = 4.000 | [in] | |
| | web $t_w = 0.375$ [in] | | | |
| Dist from bolt center to plate edge | $a = 0.5 (w - g)$ | = 1.375 | [in] | |
| | $a' = a + 0.5 d_b \leq (1.25 b + 0.5 d_b)$ | = 1.750 | [in] | AISC 14 th Eq 9-27 |
| Bolt hole diameter | bolt dia $d_b = 0.750$ [in] | bolt hole dia $d_h = 0.813$ | [in] | AISC 14 th B4.3b |
| Dist from bolt center to face of web | $b = 0.5(g - t_w)$ | = 1.813 | [in] | |
| | $b' = b - 0.5 d_b$ | = 1.438 | [in] | AISC 14 th Eq 9-21 |
| Bolt pitch spacing | $s_v = 3.000$ | | | |
| Bolt tributary length | $p = s_v$ $p \leq 2b$ and $p \leq s_v$ | = 2.875 | [in] | AISC 14 th Page 9-11 |
| | $\rho = b' / a'$ | = 0.821 | | AISC 14 th Eq 9-26 |
| | $\delta = 1 - d_h / p$ | = 0.717 | | AISC 14 th Eq 9-24 |
| Tensile capacity per bolt before considering prying | B = from calc shown in above section | = 26.20 | [kips] | |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Page 9-10 |
| End plate thickness | t = 0.375 [in] | tensile $F_u = 65.0$ | [ksi] | |
| Plate thickness req'd to develop bolt tensile capacity without prying | $t_c = \left(\frac{4 B b'}{\phi p F_u} \right)^{0.5}$ | = 0.946 | [in] | AISC 14 th Eq 9-30a |
| | $\alpha' = \frac{1}{\delta (1 + \rho)} \left[\left(\frac{t_c}{t} \right)^2 - 1 \right]$ | = 4.109 | | AISC 14 th Eq 9-35 |
| when $\alpha' > 1$ | $Q = \left(\frac{t}{t_c} \right)^2 (1 + \delta)$ | = 0.270 | | AISC 14 th Eq 9-34 |
| Bolt tensile force per bolt in demand | T = from calc shown below | = 0.25 | [kips] | |
| Tensile strength per bolt after considering prying | $\phi r_n = B \times Q$ | = 7.06 | [kips] | AISC 14 th Eq 9-31 |
| | ratio = 0.04 | > T | OK | |
| Calculate Max Single Bolt Tensile Load | | | | |
| Bolt group force | axial P = 0.99 [kips] | | | |
| Bolt number | Bolt Row $n_h = 2$ | Bolt Col $n_v = 2$ | | |
| Bolt tensile force per bolt | $T = P / (n_v n_h)$ | = 0.25 | [kips] | |

| Gusset Plate to End Plate Weld Strength | | ratio = 4.55 / 10.97 | = 0.42 | PASS |
|---|---|----------------------|-------------------------------|---------------------------------|
| Weld Group Forces | | | | |
| | shear V = 30.16 [kips] | | axial P = -0.99 [kips] | in tension |
| Gusset-end plate fillet weld length | L = weld length tributary to bolt group | = 6.625 [in] | | |
| Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = P / L$ | = -0.149 [kip/in] | | in tension |
| Weld stress from shear force | $f_v = V / L$ | = 4.552 [kip/in] | | |
| Weld stress combined - max | $f_{max} = (f_a^2 + f_v^2)^{0.5}$ | = 4.555 [kip/in] | | AISC 14 th Eq 8-11 |
| Weld stress load angle | $\theta = \tan^{-1} \left(\frac{f_a}{f_v} \right)$ | = 1.9 [°] | | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | w = 5/16 [in] | | load angle $\theta = 1.9$ [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | | strength coeff $C_1 = 1.00$ | AISC 14 th Table 8-3 |
| Number of weld line | n = 2 for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | = 1.00 | | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | = 18.614 [kip/in] | | AISC 14 th Eq 8-1 |
| Base metal - gusset plate | thickness t = 0.375 [in] | | tensile $F_u = 65.0$ [ksi] | |
| Base metal - gusset plate is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | AISC 14 th J2.4 |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | = 14.625 [kip/in] | | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | = 14.625 [kip/in] | | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | = 10.969 [kip/in] | | |
| | ratio = 0.42 | > f_{max} | OK | |

Brace Force Load Case 2

Gusset plate t=0.375

P =100.00 kips (C)

ratio = 0.42

PASS

| Gusset Plate - Shear Yielding | | ratio = 30.16 / 74.53 | = 0.40 | PASS |
|--------------------------------------|--------------------------|----------------------------|------------------------------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 6.625$ [in] | | thickness $t_p = 0.375$ [in] | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.484 [in ²] | | |
| Shear force required | $V_u =$ | = 30.16 [kips] | | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 74.53 [kips] | | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 74.53 [kips] | | |
| | ratio = 0.40 | > V_u | OK | |

| Gusset Plate - Shear Rupture | | ratio = 30.16 / 72.67 | = 0.42 | PASS |
|-------------------------------------|--------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Plate size | width $b_p = 6.625$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = b_p t_p$ | = 2.484 [in ²] | | |
| Shear force in demand | $V_u =$ | = 30.16 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 96.89 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 72.67 [kips] | | |
| | ratio = 0.42 | > V_u | | OK |

| End Plate - Shear Yield | | ratio = 15.08 / 64.69 | = 0.23 | PASS |
|-----------------------------------|--------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.156 [in ²] | | |
| Shear force required | $V_u =$ | = 15.08 [kips] | | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 64.69 [kips] | | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 64.69 [kips] | | |
| | ratio = 0.23 | > V_u | | OK |

| End Plate - Shear Rupture | | ratio = 15.08 / 43.88 | = 0.34 | PASS |
|----------------------------------|------------------------------|--------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = (b_p - n d_h) t_p$ | = 1.500 [in ²] | | |
| Shear force required | $V_u =$ | = 15.08 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 58.50 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 43.88 [kips] | | |
| | ratio = 0.34 | > V_u | | OK |

| End Plate - Block Shear - Center Strip | | ratio = 30.16 / 124.31 | = 0.24 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 1.172 [in ²] | | |
| Block shear strength required | $V_u =$ | = 30.16 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 165.75 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 124.31 [kips] | | |
| | ratio = 0.24 | > V_u | OK | |

| End Plate - Block Shear - 2-Side Strip | | ratio = 30.16 / 101.46 | = 0.30 | PASS |
|--|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 0.703 [in ²] | | |
| Block shear strength required | $V_u =$ | = 30.16 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 135.28 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 101.46 [kips] | | |
| | ratio = 0.30 | > V_u | OK | |

| End Plate - Bolt Bearing on End Plate | | ratio = 30.16 / 71.57 | = 0.42 | PASS |
|---|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ [in] | edge distance $L_e = 1.375$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 0.969 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 35.42 | [kips] | AISC 14 th Eq J3-6b |
| | = 35.42 ≤ 54.84 | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 30.16 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.42 | > V_u | OK | |

| End Plate / Column - Bolt Shear | | ratio = 30.16 / 71.57 | = 0.42 | PASS |
|--|---------------------------------|-------------------------|--------------------|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 1$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 30.16 | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 95.43 | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.42 | > V_u | OK | |

| End Plate / Column - Bolt Bearing on Column | | ratio = 30.16 / 71.57 | = 0.42 | PASS |
|---|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | [in] | | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.295$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 43.14 | [kips] | AISC 14 th Eq J3-6b |
| | = 62.92 ≤ 43.14 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 30.16 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.42 | > V_u | | OK |

| Gusset Plate to End Plate Weld Strength | | ratio = 4.55 / 10.97 | = 0.42 | PASS |
|---|---|----------------------|-------------------------------|---------------------------------|
| Weld Group Forces | | | | |
| | shear V = 30.16 [kips] | | axial P = 0.99 [kips] | in compression |
| Gusset-end plate fillet weld length | L = weld length tributary to bolt group | = 6.625 [in] | | |
| Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = P / L$ | = 0.000 [kip/in] | | in compression |
| Weld stress from shear force | $f_v = V / L$ | = 4.552 [kip/in] | | |
| Weld stress combined - max | $f_{max} = f_v$ | = 4.552 [kip/in] | | AISC 14 th Eq 8-11 |
| Weld stress load angle | $\theta =$ | = 0.0 [°] | | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | $w = \frac{5}{16}$ [in] | | load angle $\theta = 0.0$ [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | | strength coeff $C_1 = 1.00$ | AISC 14 th Table 8-3 |
| Number of weld line | $n = 2$ for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | = 1.00 | | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | = 18.559 [kip/in] | | AISC 14 th Eq 8-1 |
| Base metal - gusset plate | thickness t = 0.375 [in] | | tensile $F_u = 65.0$ [ksi] | |
| Base metal - gusset plate is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | AISC 14 th J2.4 |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | = 14.625 [kip/in] | | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | = 14.625 [kip/in] | | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | = 10.969 [kip/in] | | |
| | ratio = 0.42 | | > f_{max} | OK |

Top Brace - Gusset to Beam

Direct Weld Connection

Code=AISC 360-10 LRFD

Result Summarygeometries & weld limitations = **PASS**limit states max ratio = **0.48** **PASS****Brace Weld Limitation Checks - Gusset to Beam****PASS****Min Fillet Weld Size**

| | | | |
|-------------------------------|-------------|----------------|----------------------------------|
| Thinner part joined thickness | $t =$ | $= 0.375$ [in] | |
| Min fillet weld size allowed | $w_{min} =$ | $= 0.188$ [in] | AISC 14 th Table J2.4 |
| Fillet weld size provided | $w =$ | $= 0.313$ [in] | |
| | | $> w_{min}$ | OK |

Min Fillet Weld Length

| | | | |
|--------------------------------|------------------------|-----------------|-----------------------------|
| Fillet weld size provided | $w =$ | $= 0.313$ [in] | |
| Min fillet weld length allowed | $L_{min} = 4 \times w$ | $= 1.250$ [in] | AISC 14 th J2.2b |
| Min fillet weld length | $L =$ | $= 21.384$ [in] | |
| | | $> L_{min}$ | OK |

Brace Force Load Case 1Gusset plate $t=0.375$ P = -100.00 kips (T) ratio = **0.48** **PASS****Gusset Plate - Shear Yielding**ratio = 69.72 / 240.57 = **0.29** **PASS****Plate Shear Yielding Check**

| | | | |
|-------------------------------|---------------------------|------------------------------|-------------------------------|
| Plate size | width $b_p = 21.384$ [in] | thickness $t_p = 0.375$ [in] | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | $= 8.019$ [in ²] | |
| Shear force required | $V_u =$ | $= 69.72$ [kips] | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | $= 240.57$ [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | $= 240.57$ [kips] | |
| | ratio = 0.29 | $> V_u$ | OK |

Gusset Plate - Shear Ruptureratio = 69.72 / 234.56 = **0.30** **PASS****Plate Shear Rupture Check**

| | | | |
|------------------------------|---------------------------|------------------------------|-------------------------------|
| Plate size | width $b_p = 21.384$ [in] | thickness $t_p = 0.375$ [in] | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | |
| Plate net area in shear | $A_{nv} = b_p t_p$ | $= 8.019$ [in ²] | |
| Shear force in demand | $V_u =$ | $= 69.72$ [kips] | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | $= 312.74$ [kips] | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | $= 234.56$ [kips] | |
| | ratio = 0.30 | $> V_u$ | OK |

| Gusset Plate - Axial Tensile Yield | | ratio = 40.55 / 360.86 | = 0.11 | PASS |
|---|---------------------------|------------------------------|--------|-------------------------------|
| Plate Tensile Yielding Check | | | | |
| Plate size | width $b_p = 21.384$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_g = b_p t_p$ | = 8.019 [in ²] | | |
| Tensile force required | $P_u =$ | = 40.55 [kips] | | |
| Plate tensile yielding strength | $R_n = F_y A_g$ | = 400.95 [kips] | | AISC 14 th Eq J4-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Eq J4-1 |
| | $\phi R_n =$ | = 360.86 [kips] | | |
| | ratio = 0.11 | > P_u | | OK |

| Gusset Plate - Axial Tensile Rupture | | ratio = 40.55 / 390.93 | = 0.10 | PASS |
|---|---------------------------|------------------------------|--------|-------------------------------|
| Plate Tensile Rupture Check | | | | |
| Plate size | width $b_p = 21.384$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in tension | $A_{nt} = b_p t_p$ | = 8.019 [in ²] | | |
| Tensile force required | $P_u =$ | = 40.55 [kips] | | |
| Plate tensile rupture strength | $R_n = F_u A_{nt}$ | = 521.24 [kips] | | AISC 14 th Eq J4-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-2 |
| | $\phi R_n =$ | = 390.93 [kips] | | AISC 14 th Eq J4-2 |
| | ratio = 0.10 | > P_u | | OK |

| Gusset Plate - Flexural Yield Interact | | ratio = | = 0.10 | PASS |
|---|---|-----------------------------|--------|-------------------------------|
| Gusset plate | width $b_p = 21.384$ [in] | thick $t_p = 0.375$ [in] | | |
| | yield $F_y = 50.0$ [ksi] | | | |
| Shear plate - gross area | $A_g = b_p \times t_p$ | = 8.019 [in ²] | | |
| Shear plate - plastic modulus | $Z_p = (b_p \times t_p^2) / 4$ | = 42.870 [in ³] | | |
| Flexural strength available | $M_c = \phi F_y Z_p$ $\phi=0.90$ | = 160.76 [kip-ft] | | |
| Flexural strength required | $M_r =$ from gusset interface forces calc | = 4.78 [kip-ft] | | |
| Axial strength available | $P_c =$ from axial tensile yield check | = 360.86 [kips] | | |
| Axial strength required | $P_r =$ from gusset interface forces calc | = 40.55 [kips] | | |
| Shear strength available | $V_c =$ from shear yielding check | = 240.57 [kips] | | |
| Shear strength required | $V_r =$ from gusset interface forces calc | = 69.72 [kips] | | |
| Flexural yield interaction | ratio = $(\frac{V_r}{V_c})^2 + (\frac{P_r}{P_c} + \frac{M_r}{M_c})^2$ | = 0.10 | | AISC 14 th Eq 10-5 |
| | | < 1.0 | | OK |

| Gusset Plate - Flexural Rupture Interact | | ratio = | = 0.11 | PASS |
|---|--|--------------------------|-----------------------------|-------------------------------|
| Gusset plate | width $b_p = 21.384$ [in] tensile $F_u = 65.0$ [ksi] | thick $t_p = 0.375$ [in] | | |
| Net area of plate | $A_n = b_p \times t_p$ | | = 8.019 [in ²] | |
| Plastic modulus of net section | $Z_{net} = (b_p \times t_p^2) / 4$ | | = 42.870 [in ³] | |
| Flexural strength available | $M_c = \phi F_u Z_{net}$ $\phi=0.75$ | | = 174.16 [kip-ft] | |
| Flexural strength required | $M_r =$ from gusset interface forces calc | | = 4.78 [kip-ft] | |
| Axial strength available | $P_c =$ from axial tensile rupture check | | = 390.93 [kips] | |
| Axial strength required | $P_r =$ from gusset interface forces calc | | = 40.55 [kips] | |
| Shear strength available | $V_c =$ from shear rupture check | | = 234.56 [kips] | |
| Shear strength required | $V_r =$ from gusset interface forces calc | | = 69.72 [kips] | |
| Flexural rupture interaction | $\text{ratio} = \left(\frac{V_r}{V_c} \right)^2 + \left(\frac{P_r}{P_c} + \frac{M_r}{M_c} \right)^2$ | | = 0.11 | AISC 14 th Eq 10-5 |
| | | | < 1.0 | OK |

| Gusset to Beam Weld Strength | | ratio = 4.20 / 8.78 | = 0.48 | PASS |
|--|---|---------------------|--------------------------------|----------------------------------|
| Gusset to Beam Interface - Forces | | | | |
| | shear $H_b = 69.72$ [kips] | | axial $V_b = -40.55$ [kips] | in tension |
| | moment $M_b = 4.78$ [kip-ft] | | | |
| Gusset-beam fillet weld length | $L_w =$ | | = 21.384 [in] | |
| Gusset to Beam Interface - Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = V_b / L_{wb}$ | | = -1.896 [kip/in] | in tension |
| Weld stress from shear force | $f_v = H_b / L_{wb}$ | | = 3.260 [kip/in] | |
| Weld stress from moment force | $f_b = \frac{M}{L^2 / 6}$ | | = 0.753 [kip/in] | |
| Weld stress combined - max | $f_{max} = [(f_a - f_b)^2 + f_v^2]^{0.5}$ | | = 4.201 [kip/in] | AISC 14 th Eq 8-11 |
| Weld resultant load angle | $\theta = \tan^{-1} [(f_b - f_a) / f_v]$ | | = 39.1 [°] | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | $w = 5/16$ [in] | | load angle $\theta = 39.1$ [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | | strength coeff $C_1 = 1.00$ | AISC 14 th Table 8-3 |
| Number of weld line | $n = 2$ for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | | = 1.25 | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | | = 23.205 [kip/in] | AISC 14 th Eq 8-1 |
| Base metal - gusset plate | thickness $t = 0.375$ [in] | | tensile $F_u = 65.0$ [ksi] | |
| Base metal - gusset plate is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | AISC 14 th J2.4 |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | | = 14.625 [kip/in] | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | | = 14.625 [kip/in] | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | | = 10.969 [kip/in] | |
| When gusset plate is directly welded to beam or column, apply 1.25 ductility factor to allow adequate force redistribution in the weld group | | | | AISC 14 th Page 13-11 |
| Weld strength used for design after applying ductility factor | $\phi R_n = \phi R_n \times (1/1.25)$ | | = 8.775 [kip/in] | |
| | ratio = 0.48 | | > f_{max} | OK |

| Beam Web Local Yielding | | ratio = 51.28 / 401.73 | = 0.13 | PASS |
|--|--|------------------------|------------------------|--------------------------------|
| Gusset Edge Equivalent Normal Force | | | | |
| Refer to AISC DG29 Fig. B-1 for formula below to calculate gusset edge equivalent normal force | | | | |
| Gusset edge axial force | N = | | = -40.55 [kips] | |
| Gusset edge moment force | M = | | = 4.78 [kip-ft] | |
| Gusset edge interface length | L = | | = 21.384 [in] | |
| Gusset edge equivalent normal force | $N_e = N - \frac{4M}{L}$ | | = -51.28 [kips] | AISC DG29 Fig B-1 |
| <hr/> | | | | |
| Concentrated force from gusset | $P_u =$ | | = 51.28 [kips] | |
| Beam section | d = 12.100 [in] | | $t_f = 0.575$ [in] | |
| | $t_w = 0.335$ [in] | | k = 1.080 [in] | |
| | yield $F_y = 50.0$ [ksi] | | | |
| <hr/> | | | | |
| Length of bearing | $l_b =$ Gusset/Beam interface length | | = 21.284 [in] | |
| Gusset plate corner clip | clip = from user input | | = 0.750 [in] | |
| Distance from normal force applied point to member end | $l_N = 0.5 l_b + \text{clip}$ | | = 11.392 [in] | |
| | when $l_N \leq d$, use AISC 14 th Eq J10-3 | | | AISC 14 th Eq J10-3 |
| Beam web local yielding strength | $R_n = F_y t_w (2.5 k + l_b)$ | | = 401.73 [kips] | AISC 14 th Eq J10-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | |
| | $\phi R_n =$ | | = 401.73 [kips] | |
| | ratio = 0.13 | | > P_u | OK |

| Brace Force Load Case 2 | | Gusset plate t=0.375 | P =100.00 kips (C) | ratio = 0.37 | PASS |
|--------------------------------------|---------------------------|------------------------|------------------------------|--------------|-------------------------------|
| <hr/> | | | | | |
| Gusset Plate - Shear Yielding | | ratio = 69.72 / 240.57 | | = 0.29 | PASS |
| <hr/> | | | | | |
| Plate Shear Yielding Check | | | | | |
| <hr/> | | | | | |
| Plate size | width $b_p = 21.384$ [in] | | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | | = 8.019 [in ²] | | |
| Shear force required | $V_u =$ | | = 69.72 [kips] | | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | | = 240.57 [kips] | | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | | = 240.57 [kips] | | |
| | ratio = 0.29 | | > V_u | OK | |

| Gusset Plate - Shear Rupture | | ratio = 69.72 / 234.56 | = 0.30 | PASS |
|-------------------------------------|---------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Plate size | width $b_p = 21.384$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = b_p t_p$ | = 8.019 [in ²] | | |
| Shear force in demand | $V_u =$ | = 69.72 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 312.74 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 234.56 [kips] | | |
| | ratio = 0.30 | > V_u | | OK |

| Gusset Plate - Axial Yield | | ratio = 40.55 / 360.86 | = 0.11 | PASS |
|-------------------------------------|---------------------------|------------------------------|--------|-------------------------------|
| Plate Tensile Yielding Check | | | | |
| Plate size | width $b_p = 21.384$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_g = b_p t_p$ | = 8.019 [in ²] | | |
| Tensile force required | $P_u =$ | = 40.55 [kips] | | |
| Plate tensile yielding strength | $R_n = F_y A_g$ | = 400.95 [kips] | | AISC 14 th Eq J4-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Eq J4-1 |
| | $\phi R_n =$ | = 360.86 [kips] | | |
| | ratio = 0.11 | > P_u | | OK |

| Gusset Plate - Flexural Yield Interact | | ratio = | = 0.10 | PASS |
|---|---|-----------------------------|--------|-------------------------------|
| Gusset plate | width $b_p = 21.384$ [in] | thick $t_p = 0.375$ [in] | | |
| | yield $F_y = 50.0$ [ksi] | | | |
| Shear plate - gross area | $A_g = b_p \times t_p$ | = 8.019 [in ²] | | |
| Shear plate - plastic modulus | $Z_p = (b_p \times t_p^2) / 4$ | = 42.870 [in ³] | | |
| Flexural strength available | $M_c = \phi F_y Z_p \quad \phi=0.90$ | = 160.76 [kip-ft] | | |
| Flexural strength required | $M_r =$ from gusset interface forces calc | = 4.78 [kip-ft] | | |
| Axial strength available | $P_c =$ from axial tensile yield check | = 360.86 [kips] | | |
| Axial strength required | $P_r =$ from gusset interface forces calc | = 40.55 [kips] | | |
| Shear strength available | $V_c =$ from shear yielding check | = 240.57 [kips] | | |
| Shear strength required | $V_r =$ from gusset interface forces calc | = 69.72 [kips] | | |
| Flexural yield interaction | ratio = $(\frac{V_r}{V_c})^2 + (\frac{P_r}{P_c} + \frac{M_r}{M_c})^2$ | = 0.10 | | AISC 14 th Eq 10-5 |
| | | < 1.0 | | OK |

| Gusset Plate - Flexural Rupture Interact | | ratio = | = 0.09 | PASS |
|---|---|--------------------------|-----------------------------|-------------------------------|
| Gusset plate | width $b_p = 21.384$ [in] tensile $F_u = 65.0$ [ksi] | thick $t_p = 0.375$ [in] | | |
| Net area of plate | $A_n = b_p \times t_p$ | | = 8.019 [in ²] | |
| Plastic modulus of net section | $Z_{net} = (b_p \times t_p^2) / 4$ | | = 42.870 [in ³] | |
| Flexural strength available | $M_c = \phi F_u Z_{net}$ $\phi=0.75$ | | = 174.16 [kip-ft] | |
| Flexural strength required | $M_r =$ from gusset interface forces calc | | = 4.78 [kip-ft] | |
| Shear strength available | $V_c =$ from shear rupture check | | = 234.56 [kips] | |
| Shear strength required | $V_r =$ from gusset interface forces calc | | = 69.72 [kips] | |
| Flexural rupture interaction | $ratio = \left(\frac{V_r}{V_c} \right)^2 + \left(\frac{M_r}{M_c} \right)^2$ | | = 0.09 | AISC 14 th Eq 10-5 |
| | | | < 1.0 | OK |

| Gusset to Beam Weld Strength | | ratio = 3.26 / 8.78 | = 0.37 | PASS |
|--|--|-----------------------------|-------------------|----------------------------------|
| Gusset to Beam Interface - Forces | | | | |
| | shear $H_b = 69.72$ [kips] moment $M_b = 4.78$ [kip-ft] | axial $V_b = 40.55$ [kips] | in compression | |
| Gusset-beam fillet weld length | $L_w =$ | | = 21.384 [in] | |
| Gusset to Beam Interface - Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = V_b / L_{wb}$ | | = 1.896 [kip/in] | in compression |
| Weld stress from shear force | $f_v = H_b / L_{wb}$ | | = 3.260 [kip/in] | |
| Weld stress from moment force | $f_b = \frac{M}{L^2 / 6}$ | | = 0.753 [kip/in] | |
| Weld stress combined - max | $f_{max} = f_v$ | | = 3.260 [kip/in] | AISC 14 th Eq 8-11 |
| Weld resultant load angle | $\theta =$ weld only has shear component | | = 0.0 [°] | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | $w = 5/16$ [in] | load angle $\theta = 0.0$ | | [°] |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | strength coeff $C_1 = 1.00$ | | AISC 14 th Table 8-3 |
| Number of weld line | $n = 2$ for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | | = 1.00 | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | | = 18.559 [kip/in] | AISC 14 th Eq 8-1 |
| Base metal - gusset plate | thickness $t = 0.375$ [in] | tensile $F_u = 65.0$ [ksi] | | |
| Base metal - gusset plate is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | AISC 14 th J2.4 |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | | = 14.625 [kip/in] | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | | = 14.625 [kip/in] | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | | = 10.969 [kip/in] | |
| When gusset plate is directly welded to beam or column, apply 1.25 ductility factor to allow adequate force redistribution in the weld group | | | | AISC 14 th Page 13-11 |
| Weld strength used for design after applying ductility factor | $\phi R_n = \phi R_n \times (1/1.25)$ | | = 8.775 [kip/in] | |
| | ratio = 0.37 | | > f_{max} | OK |

| Beam Web Local Yielding | | ratio = 51.28 / 401.73 = 0.13 | | PASS |
|--|--|--------------------------------------|---------------|--------------------------------|
| Gusset Edge Equivalent Normal Force | | | | |
| Refer to AISC DG29 Fig. B-1 for formula below to calculate gusset edge equivalent normal force | | | | |
| Gusset edge axial force | $N =$ | $= 40.55$ | [kips] | |
| Gusset edge moment force | $M =$ | $= 4.78$ | [kip-ft] | |
| Gusset edge interface length | $L =$ | $= 21.384$ | [in] | |
| Gusset edge equivalent normal force | $N_e = N + \frac{4M}{L}$ | $= 51.28$ | [kips] | AISC DG29 Fig B-1 |
| <hr/> | | | | |
| Concentrated force from gusset | $P_u =$ | $= 51.28$ | [kips] | |
| Beam section | $d = 12.100$ | [in] | $t_f = 0.575$ | [in] |
| | $t_w = 0.335$ | [in] | $k = 1.080$ | [in] |
| | yield $F_y = 50.0$ | [ksi] | | |
| <hr/> | | | | |
| Length of bearing | $l_b =$ Gusset/Beam interface length | $= 21.284$ | [in] | |
| Gusset plate corner clip | clip = from user input | $= 0.750$ | [in] | |
| Distance from normal force applied point to member end | $l_N = 0.5 l_b + \text{clip}$ | $= 11.392$ | [in] | |
| | when $l_N \leq d$, use AISC 14 th Eq J10-3 | | | AISC 14 th Eq J10-3 |
| Beam web local yielding strength | $R_n = F_y t_w (2.5 k + l_b)$ | $= 401.73$ | [kips] | AISC 14 th Eq J10-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | |
| | $\phi R_n =$ | $= 401.73$ | [kips] | |
| | ratio = 0.13 | $> P_u$ | OK | |

| Beam Web Local Crippling | | ratio = 51.28 / 355.51 | = 0.14 | PASS |
|--|---|------------------------|-----------------|---------------------------------------|
| Gusset Edge Equivalent Normal Force | | | | |
| Refer to AISC DG29 Fig. B-1 for formula below to calculate gusset edge equivalent normal force | | | | |
| Gusset edge axial force | N = | | = 40.55 | [kips] |
| Gusset edge moment force | M = | | = 4.78 | [kip-ft] |
| Gusset edge interface length | L = | | = 21.384 | [in] |
| Gusset edge equivalent normal force | $N_e = N + \frac{4M}{L}$ | | = 51.28 | [kips] AISC DG29 Fig B-1 |
| <hr/> | | | | |
| Concentrated force from gusset | $P_u =$ | | = 51.28 | [kips] |
| Beam section | d = 12.100 | [in] | $t_f = 0.575$ | [in] |
| | $t_w = 0.335$ | [in] | k = 1.080 | [in] |
| | yield $F_y = 50.0$ | [ksi] | E = 29000 | [ksi] |
| <hr/> | | | | |
| Length of bearing | $l_b =$ Gusset/Beam interface length | | = 21.284 | [in] |
| Gusset plate corner clip | clip = from user input | | = 0.750 | [in] |
| Distance from normal force applied point to member end | $l_N = 0.5 l_b + \text{clip}$ | | = 11.392 | [in] |
| | when $l_N \geq d/2$, use Eq J10-4 | | | AISC 14 th Eq J10-4 |
| Beam web local crippling strength | $R_n = 0.8 t_w^2 \left[1 + 3 \frac{l_b}{d} \left(\frac{t_w}{t_f} \right)^{1.5} \right] \times \left(\frac{E F_y t_f}{t_w} \right)^{0.5}$ | | = 474.01 | [kips] AISC 14 th Eq J10-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J10.3 |
| | $\phi R_n =$ | | = 355.51 | [kips] |
| | ratio = 0.14 | | > P_u | OK |

Bottom Brace - Brace to Gusset Sect=W8X24 $P_{LC1} = 50.00$ kips (C) $P_{LC2} = -50.00$ kips (T) Code=AISC 360-10 LRFD

Result Summarygeometries & weld limitations = **PASS**limit states max ratio = **0.69****PASS****Geometry Restriction Checks - Web Plate to Gusset****PASS****Min Bolt Edge Distance - Web Plate to Gusset**

| | | | |
|--|---------------|---------------------|----------------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in Web Plate to Gusset | $L_e =$ | = 1.375 [in] | |
| | | > L_{e-min} | OK |

Min Bolt Spacing - Web Plate to Gusset

| | | | |
|---|-------------------------|---------------------|----------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in Web Plate to Gusset | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

Geometry Restriction Checks - Web Plate to Brace Web**PASS****Min Bolt Edge Distance - Web Plate to Brace Web**

| | | | |
|---|---------------|---------------------|----------------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in Web Plate to Brace Web | $L_e =$ | = 1.375 [in] | |
| | | > L_{e-min} | OK |

Min Bolt Spacing - Web Plate to Brace Web

| | | | |
|--|-------------------------|---------------------|----------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in Web Plate to Brace Web | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

Brace Force Load Case 1

Sect=W8X24

P = 50.00 kips (C)

ratio = **0.48****PASS****Web Plate - Brace Side - Bolt Shear**ratio = 50.00 / 143.14 = **0.35****PASS**

| | | | |
|-------------------------------------|---------------------------------|--|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 2$ | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | |
| Required shear strength | $V_u =$ | = 50.00 [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 190.85 [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 143.14 [kips] | |
| | ratio = 0.35 | > V_u | OK |

| Web Plate - Brace Side - Bolt Bearing on Web Plate | | ratio = 25.00 / 71.57 | = 0.35 | PASS |
|---|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | edge distance $L_e = 1.375$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 0.969 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 35.42 | [kips] | AISC 14 th Eq J3-6b |
| | = 35.42 ≤ 54.84 | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 25.00 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.35 | > V_u | OK | |

| Web Plate - Brace Side - Bolt Bearing on Brace Web | | ratio = 50.00 / 107.49 | = 0.47 | PASS |
|---|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.245$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | | | AISC 14 th Eq J3-6b |
| | = 52.25 ≤ 35.83 | = 35.83 | [kips] | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 35.83 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 143.33 | [kips] | |
| Required shear strength | $V_u =$ | = 50.00 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 107.49 | [kips] | |
| | ratio = 0.47 | > V_u | OK | |
| Web Plate - Gusset PL Side - Bolt Shear | | | | |
| | | ratio = 50.00 / 143.14 | = 0.35 | PASS |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 50.00 | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 190.85 | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 143.14 | [kips] | |
| | ratio = 0.35 | > V_u | OK | |

| Web Plate - Gusset PL Side - Bolt Bearing on Web Plate | | ratio = 25.00 / 71.57 | = 0.35 | PASS |
|---|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | [in] | | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.375$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 25.00 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.35 | > V_u | OK | |

| Web Plate - Gusset PL Side - Bolt Bearing on Gusset Plate | | ratio = 50.00 / 143.14 | = 0.35 | PASS |
|--|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | | [in] | |
| | | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | | |
| | | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | [in] | | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.375$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | | | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | = 54.84 | [kips] | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 47.71 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 190.85 | [kips] | |
| Required shear strength | $V_u =$ | = 50.00 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 143.14 | [kips] | |
| | ratio = 0.35 | > V_u | OK | |

| Web Plate - Compression Buckling | | ratio = 25.00 / 73.02 | = 0.34 | PASS |
|----------------------------------|---|------------------------------|--------|--------------------------------|
| Plate Compression Check | | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| | $F_y = 50.0$ [ksi] | $E = 29000$ [ksi] | | |
| Plate gross area in compression | $A_g = b_p t_p$ | $= 2.156$ [in ²] | | |
| Plate radius of gyration | $r = t_p / \sqrt{12}$ | $= 0.108$ [in] | | |
| Plate effective length factor | $K =$ | $= 1.00$ | | |
| Plate unbraced length | $L_u =$ | $= 6.750$ [in] | | |
| Plate slenderness | $KL/r = 1.00 \times L_u / r$ | $= 62.35$ | | |
| | when $\frac{KL}{r} > 25$, use Chapter E | | | AISC 14 th J4.4 (b) |
| Elastic buckling stress | $F_e = \frac{\pi^2 E}{(KL/r)^2}$ | $= 73.62$ [ksi] | | AISC 14 th Eq E3-4 |
| | when $\frac{KL}{r} \leq 4.71 \left(\frac{E}{F_y} \right)^{0.5} = 113.43$ | | | AISC 14 th E3 (a) |
| Critical stress | $F_{cr} = 0.658^{(F_y/F_e)} F_y$ | $= 37.63$ [ksi] | | AISC 14 th Eq E3-2 |
| Plate compression required | $P_u =$ | $= 25.00$ [kips] | | |
| Plate compression provided | $R_n = F_{cr} \times A_g$ | $= 81.13$ [kips] | | AISC 14 th Eq E3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th E1 |
| | $\phi R_n =$ | $= 73.02$ [kips] | | |
| | ratio = 0.34 | $> P_u$ | | OK |

| Gusset Plate - Compression (Whitmore) | | ratio = 50.00 / 103.76 | = 0.48 | PASS |
|--|---|------------------------------|-----------|--------------------------------|
| Plate Compression Check | | | | |
| Plate size | width $b_p = 6.464$ [in] | thickness $t_p = 0.375$ [in] | | |
| | $F_y = 50.0$ [ksi] | $E = 29000$ [ksi] | | |
| Plate gross area in compression | $A_g = b_p t_p$ | $= 2.424$ [in ²] | | |
| Plate radius of gyration | $r = t_p / \sqrt{12}$ | $= 0.108$ [in] | | |
| Plate effective length factor | $K =$ | $= 0.50$ | | |
| Plate unbraced length | $L_u =$ | $= 5.664$ [in] | | |
| Plate slenderness | $KL/r = 0.50 \times L_u / r$ | $= 26.16$ | | |
| | when $\frac{KL}{r} > 25$, use Chapter E | | | AISC 14 th J4.4 (b) |
| Elastic buckling stress | $F_e = \frac{\pi^2 E}{(KL/r)^2}$ | $= 418.21$ [ksi] | | AISC 14 th Eq E3-4 |
| | when $\frac{KL}{r} \leq 4.71 \left(\frac{E}{F_y} \right)^{0.5} = 113.43$ | | | AISC 14 th E3 (a) |
| Critical stress | $F_{cr} = 0.658^{(F_y/F_e)} F_y$ | $= 47.56$ [ksi] | | AISC 14 th Eq E3-2 |
| Plate compression required | $P_u =$ | $= 50.00$ [kips] | | |
| Plate compression provided | $R_n = F_{cr} \times A_g$ | $= 115.28$ [kips] | | AISC 14 th Eq E3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th E1 |
| | $\phi R_n =$ | $= 103.76$ [kips] | | |
| | ratio = 0.48 | $> P_u$ | OK | |

| Brace Force Load Case 2 | Sect=W8X24 | P =-50.00 kips (T) | ratio = 0.69 | PASS |
|--------------------------------|------------|--------------------|--------------|-------------|
|--------------------------------|------------|--------------------|--------------|-------------|

| W Shape Brace - Tensile Yield | | ratio = 50.00 / 318.60 | = 0.16 | PASS |
|--------------------------------------|-----------------|------------------------------|-----------|-------------------------------|
| Gross area subject to tension | $A_g =$ | $= 7.080$ [in ²] | | |
| Steel yield strength | $F_y =$ | $= 50.0$ [ksi] | | |
| Tensile force required | $P_u =$ | $= 50.00$ [kips] | | |
| Tensile yielding strength | $R_n = F_y A_g$ | $= 354.00$ [kips] | | AISC 14 th Eq D2-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th D2 (a) |
| | $\phi R_n =$ | $= 318.60$ [kips] | | AISC 14 th Eq D2-1 |
| | ratio = 0.16 | $> P_u$ | OK | |

| W Shape Brace - Tensile Rupture | | ratio = 50.00 / 101.14 | = 0.49 | PASS |
|--|---|--------------------------|--------------------|----------------------------------|
| Section gross area | $A_g =$ | = 7.080 | [in ²] | |
| Tensile net area | $A_n =$ | = 6.651 | [in ²] | |
| No of bolt column | $n_h = 2$ | bolt space $s_h = 3.000$ | [in] | |
| Length of connection | $L = (n_h - 1) s_h$ | = 3.000 | [in] | |
| WT centroid to web bolt line dist | $\bar{x} =$ half of W8X24 sect centroid to web exterior row hor bolt line distance | = 2.064 | [in] | |
| Shear lag factor | $U = 1 - \bar{x} / L$ | = 0.312 | | AISC 14 th Table D3.1 |
| Tensile force required | $P_u =$ | = 50.00 | [kips] | |
| Tensile effective net area | $A_e = A_n U$ | = 2.075 | [in ²] | |
| Plate tensile strength | $F_u =$ | = 65.0 | [ksi] | |
| Tensile rupture strength | $R_n = F_u A_e$ | = 134.85 | [kips] | AISC 14 th Eq D2-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th D2 (b) |
| | $\phi R_n =$ | = 101.14 | [kips] | AISC 14 th Eq D2-2 |
| | ratio = 0.49 | > P_u | OK | |

| Web Plate - Tensile Yield | | ratio = 25.00 / 97.03 | = 0.26 | PASS |
|-------------------------------------|---------------------|-----------------------|-------------------------|-------------------------------|
| Plate Tensile Yielding Check | | | | |
| Plate size | width $b_p = 5.750$ | [in] | thickness $t_p = 0.375$ | [in] |
| Plate yield strength | $F_y = 50.0$ | [ksi] | | |
| Plate gross area in shear | $A_g = b_p t_p$ | = 2.156 | [in ²] | |
| Tensile force required | $P_u =$ | = 25.00 | [kips] | |
| Plate tensile yielding strength | $R_n = F_y A_g$ | = 107.81 | [kips] | AISC 14 th Eq J4-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Eq J4-1 |
| | $\phi R_n =$ | = 97.03 | [kips] | |
| | ratio = 0.26 | > P_u | OK | |

| Web Plate - Tensile Rupture | | ratio = 25.00 / 73.13 | = 0.34 | PASS |
|------------------------------------|------------------------------|-----------------------|---------------------------|----------------------------------|
| Plate Tensile Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 7/8$ | [in] AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 5.750$ | [in] | thickness $t_p = 0.375$ | [in] |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate net area in tension | $A_{nt} = (b_p - n d_h) t_p$ | = 1.500 | [in ²] | |
| Tensile force required | $P_u =$ | = 25.00 | [kips] | |
| Plate tensile rupture strength | $R_n = F_u A_{nt}$ | = 97.50 | [kips] | AISC 14 th Eq J4-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-2 |
| | $\phi R_n =$ | = 73.13 | [kips] | AISC 14 th Eq J4-2 |
| | ratio = 0.34 | > P_u | OK | |

| Web Plate - Brace Side - Bolt Shear | | ratio = 50.00 / 143.14 | = 0.35 | PASS |
|--|---------------------------------|-------------------------|--------------------|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | $= 1.000$ | | |
| Required shear strength | $V_u =$ | $= 50.00$ | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | $= 190.85$ | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | $= 143.14$ | [kips] | |
| | ratio = 0.35 | $> V_u$ | OK | |

| Web Plate - Brace Side - Bolt Bearing on Web Plate | | ratio = 25.00 / 71.57 | = 0.35 | PASS |
|---|--|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | $= 23.86$ | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ [in] | edge distance $L_e = 1.375$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | $= 2.188$ | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | $= 54.84$ | [kips] | AISC 14 th Eq J3-6b |
| | $= 79.98 \leq 54.84$ | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | $= 23.86$ | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | $= 0.969$ | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | $= 35.42$ | [kips] | AISC 14 th Eq J3-6b |
| | $= 35.42 \leq 54.84$ | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | $= 23.86$ | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | $= 95.43$ | [kips] | |
| Required shear strength | $V_u =$ | $= 25.00$ | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | $= 71.57$ | [kips] | |
| | ratio = 0.35 | $> V_u$ | OK | |

| Web Plate - Brace Side - Bolt Bearing on Brace Web | | ratio = 50.00 / 97.42 | = 0.51 | PASS |
|---|--|-----------------------------|----------------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in] [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | edge distance $L_e = 1.625$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.245$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 52.25 ≤ 35.83 | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 35.83 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 1.219 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 29.11 ≤ 35.83 | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 29.11 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 129.89 | [kips] | |
| Required shear strength | $V_u =$ | = 50.00 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 97.42 | [kips] | |
| | ratio = 0.51 | > V_u | OK | |

| Web Plate - Block Shear - Center Strip | | ratio = 25.00 / 106.03 | = 0.24 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 0.797 [in ²] | | |
| Block shear strength required | $V_u =$ | = 25.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 141.38 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 106.03 [kips] | | |
| | ratio = 0.24 | > V_u | OK | |

| Web Plate - Block Shear - 1-Side Strip | | ratio = 25.00 / 89.58 | = 0.28 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Side Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p$ | = 1.641 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p$ | = 1.148 [in ²] | | |
| Net area subject to tension when sheared out by side strip | $A_{nt} = [(n_v - 1)s_v + e_v - ((n_v - 1) + 0.5)d_h] t_p$ | = 1.148 [in ²] | | |
| Block shear strength required | $V_u =$ | = 25.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 119.44 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 89.58 [kips] | | |
| | ratio = 0.28 | > V_u | OK | |

| Web Plate - Block Shear - 2-Side Strip | | ratio = 25.00 / 101.46 | = 0.25 | PASS |
|--|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 0.703 [in ²] | | |
| Block shear strength required | $V_u =$ | = 25.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 135.28 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 101.46 [kips] | | |
| | ratio = 0.25 | > V_u | OK | |

| Brace Web - Block Shear - Center Strip | | ratio = 50.00 / 72.86 | = 0.69 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.245$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 2.465$ [in] | $e_h = 1.625$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 2.266 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 1.623 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 0.521 [in ²] | | |
| Block shear strength required | $V_u =$ | = 50.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 97.14 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 72.86 [kips] | | |
| | ratio = 0.69 | > V_u | OK | |

| Web Plate - Gusset PL Side - Bolt Shear | | ratio = 50.00 / 143.14 | = 0.35 | PASS |
|--|---------------------------------|-------------------------|--------------------|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 2$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | $= 1.000$ | | |
| Required shear strength | $V_u =$ | $= 50.00$ | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | $= 190.85$ | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | $= 143.14$ | [kips] | |
| | ratio = 0.35 | $> V_u$ | OK | |

| Web Plate - Gusset PL Side - Bolt Bearing on Web Plate | | ratio = 25.00 / 71.57 | = 0.35 | PASS |
|---|--|----------------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | $= 23.86$ | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ [in] | | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ [in] | edge distance $L_e = 1.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | $= 2.188$ | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | $= 54.84$ | [kips] | AISC 14 th Eq J3-6b |
| | $= 79.98 \leq 54.84$ | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | $= 23.86$ | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | $= 0.969$ | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | $= 35.42$ | [kips] | AISC 14 th Eq J3-6b |
| | $= 35.42 \leq 54.84$ | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | $= 23.86$ | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | $= 95.43$ | [kips] | |
| Required shear strength | $V_u =$ | $= 25.00$ | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | $= 71.57$ | [kips] | |
| | ratio = 0.35 | $> V_u$ | OK | |

| Web Plate - Gusset PL Side - Bolt Bearing on Gusset Plate | | ratio = 50.00 / 138.41 | = 0.36 | PASS |
|--|--|-----------------------------|----------------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | $A_b = 0.442$ | [in] [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = 2 \times F_{nv} A_b$ | = 47.71 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ | edge distance $L_e = 1.625$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| | = 79.98 ≤ 54.84 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 47.71 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 1.219 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ | = 44.56 | [kips] | AISC 14 th Eq J3-6b |
| | = 44.56 ≤ 54.84 | | | |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 44.56 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 184.55 | [kips] | |
| Required shear strength | $V_u =$ | = 50.00 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 138.41 | [kips] | |
| | ratio = 0.36 | > V_u | OK | |

| Gusset Plate at Web Plate - Block Shear - Center Strip | | ratio = 50.00 / 111.52 | = 0.45 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 2.465$ [in] | $e_h = 1.625$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.469 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.484 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 0.797 [in ²] | | |
| Block shear strength required | $V_u =$ | = 50.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 148.69 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 111.52 [kips] | | |
| | ratio = 0.45 | > V_u | OK | |

| Gusset Plate - Tensile Yield (Whitmore) | | ratio = 50.00 / 109.08 | = 0.46 | PASS |
|--|--------------------------|------------------------------|-----------|-------------------------------|
| Plate Tensile Yielding Check | | | | |
| Plate size | width $b_p = 6.464$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_g = b_p t_p$ | = 2.424 [in ²] | | |
| Tensile force required | $P_u =$ | = 50.00 [kips] | | |
| Plate tensile yielding strength | $R_n = F_y A_g$ | = 121.20 [kips] | | AISC 14 th Eq J4-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Eq J4-1 |
| | $\phi R_n =$ | = 109.08 [kips] | | |
| | ratio = 0.46 | > P_u | OK | |

| Gusset Plate - Tensile Rupture (Whitmore) | | ratio = 50.00 / 86.18 | = 0.58 | PASS |
|--|------------------------------|--------------------------------|-----------|-------------------------------|
| Plate Tensile Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 6.464$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in tension | $A_{nt} = (b_p - n d_h) t_p$ | = 1.768 [in ²] | | |
| Tensile force required | $P_u =$ | = 50.00 [kips] | | |
| Plate tensile rupture strength | $R_n = F_u A_{nt}$ | = 114.90 [kips] | | AISC 14 th Eq J4-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-2 |
| | $\phi R_n =$ | = 86.18 [kips] | | AISC 14 th Eq J4-2 |
| | ratio = 0.58 | > P_u | OK | |

Bottom Brace - Gusset to Column

End Plate Connection

Code=AISC 360-10 LRFD

Result Summarygeometries & weld limitations = **PASS**limit states max ratio = **0.21** **PASS****Geometry Restriction Checks - End Plate to Column Web****PASS****Min Bolt Edge Distance - End Plate to Column Web**

| | | | |
|--|---------------|---------------------|----------------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in End Plate to Column Web | $L_e =$ | = 1.375 [in] | |
| | | > L_{e-min} | OK |

Min Bolt Spacing - End Plate to Column Web

| | | | |
|---|-------------------------|---------------------|----------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in End Plate to Column Web | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

Weld Limitation Checks - Gusset Plate to End Plate**PASS****Min Fillet Weld Size**

| | | | |
|-------------------------------|-------------|---------------------|----------------------------------|
| Thinner part joined thickness | $t =$ | = 0.375 [in] | |
| Min fillet weld size allowed | $w_{min} =$ | = 0.188 [in] | AISC 14 th Table J2.4 |
| Fillet weld size provided | $w =$ | = 0.313 [in] | |
| | | > w_{min} | OK |

Min Fillet Weld Length

| | | | |
|--------------------------------|------------------------|---------------------|-----------------------------|
| Fillet weld size provided | $w =$ | = 0.313 [in] | |
| Min fillet weld length allowed | $L_{min} = 4 \times w$ | = 1.250 [in] | AISC 14 th J2.2b |
| Min fillet weld length | $L =$ | = 6.625 [in] | |
| | | > L_{min} | OK |

Brace Force Load Case 1Gusset plate $t=0.375$

P = 50.00 kips (C)

ratio = **0.21** **PASS****Gusset Plate - Shear Yielding**ratio = 15.08 / 74.53 = **0.20** **PASS****Plate Shear Yielding Check**

| | | | |
|-------------------------------|--------------------------|------------------------------|-------------------------------|
| Plate size | width $b_p = 6.625$ [in] | thickness $t_p = 0.375$ [in] | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.484 [in ²] | |
| Shear force required | $V_u =$ | = 15.08 [kips] | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 74.53 [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 74.53 [kips] | |
| | ratio = 0.20 | > V_u | OK |

| Gusset Plate - Shear Rupture | | ratio = 15.08 / 72.67 | = 0.21 | PASS |
|-------------------------------------|--------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Plate size | width $b_p = 6.625$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = b_p t_p$ | = 2.484 [in ²] | | |
| Shear force in demand | $V_u =$ | = 15.08 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 96.89 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 72.67 [kips] | | |
| | ratio = 0.21 | > V_u | | OK |

| End Plate - Shear Yield | | ratio = 7.54 / 64.69 | = 0.12 | PASS |
|-----------------------------------|--------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.156 [in ²] | | |
| Shear force required | $V_u =$ | = 7.54 [kips] | | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 64.69 [kips] | | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 64.69 [kips] | | |
| | ratio = 0.12 | > V_u | | OK |

| End Plate - Shear Rupture | | ratio = 7.54 / 43.88 | = 0.17 | PASS |
|----------------------------------|------------------------------|--------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = (b_p - n d_h) t_p$ | = 1.500 [in ²] | | |
| Shear force required | $V_u =$ | = 7.54 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 58.50 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 43.88 [kips] | | |
| | ratio = 0.17 | > V_u | | OK |

| End Plate - Block Shear - Center Strip | | ratio = 15.08 / 124.31 | = 0.12 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 1.172 [in ²] | | |
| Block shear strength required | $V_u =$ | = 15.08 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 165.75 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 124.31 [kips] | | |
| | ratio = 0.12 | > V_u | OK | |

| End Plate - Block Shear - 2-Side Strip | | ratio = 15.08 / 101.46 | = 0.15 | PASS |
|--|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 0.703 [in ²] | | |
| Block shear strength required | $V_u =$ | = 15.08 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 135.28 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 101.46 [kips] | | |
| | ratio = 0.15 | > V_u | OK | |

| End Plate - Bolt Bearing on End Plate | | ratio = 15.08 / 71.57 | = 0.21 | PASS |
|---|---|-----------------------------|--------------------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ | [in] | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ [in] | edge distance $L_e = 1.375$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | | [ksi] | |
| Plate thickness | $t = 0.375$ | | [in] | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ = 79.98 ≤ 54.84 | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 0.969 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ = 35.42 ≤ 54.84 | = 35.42 | [kips] | AISC 14 th Eq J3-6b |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 15.08 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.21 | > V_u | OK | |

| End Plate / Column - Bolt Shear | | ratio = 15.08 / 71.57 | = 0.21 | PASS |
|--|---------------------------------|-------------------------|--------------------|----------------------------------|
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 1$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 15.08 | [kips] | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 95.43 | [kips] | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.21 | > V_u | OK | |

| End Plate / Column - Bolt Bearing on Column | | ratio = 15.08 / 71.57 | = 0.21 | PASS |
|---|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | [in] | | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.295$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 43.14 | [kips] | AISC 14 th Eq J3-6b |
| | = 62.92 ≤ 43.14 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 15.08 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.21 | > V_u | | OK |

| Gusset Plate to End Plate Weld Strength | | ratio = 2.28 / 10.97 | = 0.21 | PASS |
|---|---|----------------------|-------------------------------|---------------------------------|
| Weld Group Forces | | | | |
| | shear V = 15.08 [kips] | | axial P = 0.49 [kips] | in compression |
| Gusset-end plate fillet weld length | L = weld length tributary to bolt group | = 6.625 [in] | | |
| Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = P / L$ | = 0.000 [kip/in] | | in compression |
| Weld stress from shear force | $f_v = V / L$ | = 2.276 [kip/in] | | |
| Weld stress combined - max | $f_{max} = f_v$ | = 2.276 [kip/in] | | AISC 14 th Eq 8-11 |
| Weld stress load angle | $\theta =$ | = 0.0 [°] | | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | $w = \frac{5}{16}$ [in] | | load angle $\theta = 0.0$ [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | | strength coeff $C_1 = 1.00$ | AISC 14 th Table 8-3 |
| Number of weld line | n = 2 for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | = 1.00 | | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | = 18.559 [kip/in] | | AISC 14 th Eq 8-1 |
| Base metal - gusset plate | thickness t = 0.375 [in] | | tensile $F_u = 65.0$ [ksi] | |
| Base metal - gusset plate is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | AISC 14 th J2.4 |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | = 14.625 [kip/in] | | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | = 14.625 [kip/in] | | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | = 10.969 [kip/in] | | |
| | ratio = 0.21 | | > f_{max} | OK |

Brace Force Load Case 2

Gusset plate t=0.375

P =-50.00 kips (T)

ratio = 0.21

PASS

| Gusset Plate - Shear Yielding | | ratio = 15.08 / 74.53 | = 0.20 | PASS |
|--------------------------------------|--------------------------|----------------------------|------------------------------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 6.625$ [in] | | thickness $t_p = 0.375$ [in] | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.484 [in ²] | | |
| Shear force required | $V_u =$ | = 15.08 [kips] | | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 74.53 [kips] | | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 74.53 [kips] | | |
| | ratio = 0.20 | | > V_u | OK |

| Gusset Plate - Shear Rupture | | ratio = 15.08 / 72.67 | = 0.21 | PASS |
|-------------------------------------|--------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Plate size | width $b_p = 6.625$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = b_p t_p$ | = 2.484 [in ²] | | |
| Shear force in demand | $V_u =$ | = 15.08 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 96.89 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 72.67 [kips] | | |
| | ratio = 0.21 | > V_u | | OK |

| End Plate - Shear Yield | | ratio = 7.54 / 64.69 | = 0.12 | PASS |
|-----------------------------------|--------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.156 [in ²] | | |
| Shear force required | $V_u =$ | = 7.54 [kips] | | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 64.69 [kips] | | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 64.69 [kips] | | |
| | ratio = 0.12 | > V_u | | OK |

| End Plate - Shear Rupture | | ratio = 7.54 / 43.88 | = 0.17 | PASS |
|----------------------------------|------------------------------|--------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 5.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = (b_p - n d_h) t_p$ | = 1.500 [in ²] | | |
| Shear force required | $V_u =$ | = 7.54 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 58.50 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 43.88 [kips] | | |
| | ratio = 0.17 | > V_u | | OK |

| End Plate - Block Shear - Center Strip | | ratio = 15.08 / 124.31 | = 0.12 | PASS |
|---|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 1.172 [in ²] | | |
| Block shear strength required | $V_u =$ | = 15.08 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 165.75 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 124.31 [kips] | | |
| | ratio = 0.12 | > V_u | OK | |

| End Plate - Block Shear - 2-Side Strip | | ratio = 15.08 / 101.46 | = 0.15 | PASS |
|--|--|--------------------------------|-----------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 3.281 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 2.297 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 0.703 [in ²] | | |
| Block shear strength required | $V_u =$ | = 15.08 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 135.28 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 101.46 [kips] | | |
| | ratio = 0.15 | > V_u | OK | |

| End Plate - Bolt Bearing on End Plate | | ratio = 15.08 / 71.57 | = 0.21 | PASS |
|---|---|--|--------|----------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 [kips] | | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 13/16$ [in] | | AISC 14 th Table J3.3 |
| Bolt spacing & edge distance | spacing $L_s = 3.000$ [in] | edge distance $L_e = 1.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate thickness | $t = 0.375$ [in] | | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 [in] | | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ = 79.98 ≤ 54.84 | = 54.84 [kips] | | AISC 14 th Eq J3-6b |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 [kips] | | |
| Edge Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_e - d_h / 2$ | = 0.969 [in] | | |
| Bolt tear out/bearing strength | $R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$ = 35.42 ≤ 54.84 | = 35.42 [kips] | | AISC 14 th Eq J3-6b |
| Bolt strength at edge | $R_{n-ed} = \min (R_{n-t\&b-ed}, R_{n-bolt})$ | = 23.86 [kips] | | |
| Number of bolt | interior $n_{in} = 2$ | edge $n_{ed} = 2$ | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$ | = 95.43 [kips] | | |
| Required shear strength | $V_u =$ | = 15.08 [kips] | | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 [kips] | | |
| | ratio = 0.21 | > V_u | | OK |

| End Plate / Column - Bolt Shear | | ratio = 15.08 / 71.57 | = 0.21 | PASS |
|-------------------------------------|---------------------------------|--|--------|----------------------------------|
| Bolt group forces | shear $V = 15.08$ [kips] | axial $P = 0.49$ [kips] | | |
| Bolt shear stress | grade = A325-N | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Number of bolt carried shear | $n_s = 4.0$ | shear plane $m = 1$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 15.08 [kips] | | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 95.43 [kips] | | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 71.57 [kips] | | |
| | ratio = 0.21 | > V_u | | OK |

| End Plate / Column - Bolt Bearing on Column | | ratio = 15.08 / 71.57 | = 0.21 | PASS |
|---|--|-----------------------|-----------------------------|---------------------------------------|
| Single Bolt Shear Strength | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ | [in] | bolt area $A_b = 0.442$ | [in ²] |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| Bolt Bearing/TearOut Strength on Plate | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_h = 13/16$ | [in] AISC 14 th Table J3.3 |
| Bolt spacing | spacing $L_s = 3.000$ | [in] | | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | |
| Plate thickness | $t = 0.295$ | [in] | | |
| Interior Bolt | | | | |
| Bolt hole edge clear distance | $L_c = L_s - d_h$ | = 2.188 | [in] | |
| Bolt tear out/bearing strength | $R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$ | = 43.14 | [kips] | AISC 14 th Eq J3-6b |
| | = 62.92 ≤ 43.14 | | | |
| Bolt strength at interior | $R_{n-in} = \min (R_{n-t\&b-in}, R_{n-bolt})$ | = 23.86 | [kips] | |
| Number of bolt | interior $n_{in} = 4$ | | | |
| Bolt bearing strength for all bolts | $R_n = n_{in} R_{n-in}$ | = 95.43 | [kips] | |
| Required shear strength | $V_u =$ | = 15.08 | [kips] | |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3-10 |
| | $\phi R_n =$ | = 71.57 | [kips] | |
| | ratio = 0.21 | > V_u | | OK |

| Bolt Tensile Prying Action on End Plate | | ratio = 0.12 / 7.06 | = 0.02 | PASS |
|---|---|-----------------------------|--------------------|----------------------------------|
| Bolt group forces | shear V = 15.08 [kips] | axial P = -0.49 | [kips] | |
| Single Bolt Tensile Capacity Without Considering Prying | | | | |
| Bolt grade | grade = A325-N | | | |
| Nominal tensile/shear stress | $F_{nt} = 90.0$ [ksi] | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Bolt group shear force | shear V = 15.08 [kips] | no of bolt n = 4 | | |
| Shear stress required | $f_{rv} = V / (n A_b)$ | = 8.53 | [ksi] | |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3.7 |
| Modified nominal tensile stress | $F'_{nt} = 1.3 F_{nt} - \frac{F_{nt}}{\phi F_{nv}} f_{rv} \leq F_{nt}$ | = 90.00 | [ksi] | AISC 14 th Eq J3-3a |
| Bolt nominal tensile strength | $r_n = F'_{nt} A_b$ | = 39.76 | [kips] | AISC 14 th Eq J3-1 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3.6 |
| Single bolt tensile capacity | $\phi r_n =$ | = 29.82 | [kips] | |
| Single Bolt Tensile Capacity After Considering Prying | | | | |
| End plate | width w = 6.750 [in] | bolt gage g = 4.000 | [in] | |
| | web $t_w = 0.375$ [in] | | | |
| Dist from bolt center to plate edge | $a = 0.5 (w - g)$ | = 1.375 | [in] | |
| | $a' = a + 0.5 d_b \leq (1.25 b + 0.5 d_b)$ | = 1.750 | [in] | AISC 14 th Eq 9-27 |
| Bolt hole diameter | bolt dia $d_b = 0.750$ [in] | bolt hole dia $d_h = 0.813$ | [in] | AISC 14 th B4.3b |
| Dist from bolt center to face of web | $b = 0.5(g - t_w)$ | = 1.813 | [in] | |
| | $b' = b - 0.5 d_b$ | = 1.438 | [in] | AISC 14 th Eq 9-21 |
| Bolt pitch spacing | $s_v = 3.000$ | | | |
| Bolt tributary length | $p = s_v$ $p \leq 2b$ and $p \leq s_v$ | = 2.875 | [in] | AISC 14 th Page 9-11 |
| | $\rho = b' / a'$ | = 0.821 | | AISC 14 th Eq 9-26 |
| | $\delta = 1 - d_h / p$ | = 0.717 | | AISC 14 th Eq 9-24 |
| Tensile capacity per bolt before considering prying | B = from calc shown in above section | = 29.82 | [kips] | |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Page 9-10 |
| End plate thickness | t = 0.375 [in] | tensile $F_u = 65.0$ | [ksi] | |
| Plate thickness req'd to develop bolt tensile capacity without prying | $t_c = \left(\frac{4 B b'}{\phi p F_u} \right)^{0.5}$ | = 1.010 | [in] | AISC 14 th Eq 9-30a |
| | $\alpha' = \frac{1}{\delta (1 + \rho)} \left[\left(\frac{t_c}{t} \right)^2 - 1 \right]$ | = 4.783 | | AISC 14 th Eq 9-35 |
| when $\alpha' > 1$ | $Q = \left(\frac{t}{t_c} \right)^2 (1 + \delta)$ | = 0.237 | | AISC 14 th Eq 9-34 |
| Bolt tensile force per bolt in demand | T = from calc shown below | = 0.12 | [kips] | |
| Tensile strength per bolt after considering prying | $\phi r_n = B \times Q$ | = 7.06 | [kips] | AISC 14 th Eq 9-31 |
| | ratio = 0.02 | > T | OK | |
| Calculate Max Single Bolt Tensile Load | | | | |
| Bolt group force | axial P = 0.49 [kips] | | | |
| Bolt number | Bolt Row $n_h = 2$ | Bolt Col $n_v = 2$ | | |
| Bolt tensile force per bolt | $T = P / (n_v n_h)$ | = 0.12 | [kips] | |

| Gusset Plate to End Plate Weld Strength | | ratio = 2.28 / 10.97 | = 0.21 | PASS |
|---|---|----------------------|-------------------------------|---------------------------------|
| Weld Group Forces | | | | |
| | shear V = 15.08 [kips] | | axial P = -0.49 [kips] | in tension |
| Gusset-end plate fillet weld length | L = weld length tributary to bolt group | = 6.625 [in] | | |
| Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = P / L$ | = -0.074 [kip/in] | | in tension |
| Weld stress from shear force | $f_v = V / L$ | = 2.276 [kip/in] | | |
| Weld stress combined - max | $f_{max} = (f_a^2 + f_v^2)^{0.5}$ | = 2.277 [kip/in] | | AISC 14 th Eq 8-11 |
| Weld stress load angle | $\theta = \tan^{-1} \left(\frac{f_a}{f_v} \right)$ | = 1.9 [°] | | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | w = 5/16 [in] | | load angle $\theta = 1.9$ [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | | strength coeff $C_1 = 1.00$ | AISC 14 th Table 8-3 |
| Number of weld line | n = 2 for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | = 1.00 | | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | = 18.613 [kip/in] | | AISC 14 th Eq 8-1 |
| Base metal - gusset plate | thickness t = 0.375 [in] | | tensile $F_u = 65.0$ [ksi] | |
| Base metal - gusset plate is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | AISC 14 th J2.4 |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | = 14.625 [kip/in] | | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | = 14.625 [kip/in] | | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | = 10.969 [kip/in] | | |
| | ratio = 0.21 | > f_{max} | OK | |

Bottom Brace - Gusset to Beam

Direct Weld Connection

Code=AISC 360-10 LRFD

Result Summarygeometries & weld limitations = **PASS**limit states max ratio = **0.38** **PASS****Brace Weld Limitation Checks - Gusset to Beam****PASS****Min Fillet Weld Size**

| | | | |
|-------------------------------|-------------|----------------|----------------------------------|
| Thinner part joined thickness | $t =$ | $= 0.375$ [in] | |
| Min fillet weld size allowed | $w_{min} =$ | $= 0.188$ [in] | AISC 14 th Table J2.4 |
| Fillet weld size provided | $w =$ | $= 0.313$ [in] | |
| | | $> w_{min}$ | OK |

Min Fillet Weld Length

| | | | |
|--------------------------------|------------------------|-----------------|-----------------------------|
| Fillet weld size provided | $w =$ | $= 0.313$ [in] | |
| Min fillet weld length allowed | $L_{min} = 4 \times w$ | $= 1.250$ [in] | AISC 14 th J2.2b |
| Min fillet weld length | $L =$ | $= 14.893$ [in] | |
| | | $> L_{min}$ | OK |

Brace Force Load Case 1Gusset plate $t=0.375$ $P = 50.00$ kips (C)ratio = **0.27** **PASS****Gusset Plate - Shear Yielding**ratio = 34.86 / 167.55 = **0.21** **PASS****Plate Shear Yielding Check**

| | | | |
|-------------------------------|---------------------------|------------------------------|-------------------------------|
| Plate size | width $b_p = 14.893$ [in] | thickness $t_p = 0.375$ [in] | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | $= 5.585$ [in ²] | |
| Shear force required | $V_u =$ | $= 34.86$ [kips] | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | $= 167.55$ [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | $= 167.55$ [kips] | |
| | ratio = 0.21 | $> V_u$ | OK |

Gusset Plate - Shear Ruptureratio = 34.86 / 163.36 = **0.21** **PASS****Plate Shear Rupture Check**

| | | | |
|------------------------------|---------------------------|------------------------------|-------------------------------|
| Plate size | width $b_p = 14.893$ [in] | thickness $t_p = 0.375$ [in] | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | |
| Plate net area in shear | $A_{nv} = b_p t_p$ | $= 5.585$ [in ²] | |
| Shear force in demand | $V_u =$ | $= 34.86$ [kips] | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | $= 217.81$ [kips] | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | $= 163.36$ [kips] | |
| | ratio = 0.21 | $> V_u$ | OK |

| Gusset Plate - Axial Tensile Yield | | ratio = 20.27 / 251.32 | = 0.08 | PASS |
|---|---------------------------|------------------------------|--------|-------------------------------|
| Plate Tensile Yielding Check | | | | |
| Plate size | width $b_p = 14.893$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_g = b_p t_p$ | = 5.585 [in ²] | | |
| Tensile force required | $P_u =$ | = 20.27 [kips] | | |
| Plate tensile yielding strength | $R_n = F_y A_g$ | = 279.24 [kips] | | AISC 14 th Eq J4-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Eq J4-1 |
| | $\phi R_n =$ | = 251.32 [kips] | | |
| | ratio = 0.08 | > P_u | | OK |

| Gusset Plate - Flexural Yield Interact | | ratio = | = 0.06 | PASS |
|---|---|-----------------------------|--------|-------------------------------|
| Gusset plate | width $b_p = 14.893$ [in] | thick $t_p = 0.375$ [in] | | |
| | yield $F_y = 50.0$ [ksi] | | | |
| Shear plate - gross area | $A_g = b_p \times t_p$ | = 5.585 [in ²] | | |
| Shear plate - plastic modulus | $Z_p = (b_p \times t_p^2) / 4$ | = 20.794 [in ³] | | |
| Flexural strength available | $M_c = \phi F_y Z_p$ $\phi=0.90$ | = 77.98 [kip-ft] | | |
| Flexural strength required | $M_r =$ from gusset interface forces calc | = 3.09 [kip-ft] | | |
| Axial strength available | $P_c =$ from axial tensile yield check | = 251.32 [kips] | | |
| Axial strength required | $P_r =$ from gusset interface forces calc | = 20.27 [kips] | | |
| Shear strength available | $V_c =$ from shear yielding check | = 167.55 [kips] | | |
| Shear strength required | $V_r =$ from gusset interface forces calc | = 34.86 [kips] | | |
| Flexural yield interaction | ratio = $(\frac{V_r}{V_c})^2 + (\frac{P_r}{P_c} + \frac{M_r}{M_c})^2$ | = 0.06 | | AISC 14 th Eq 10-5 |
| | | < 1.0 | | OK |

| Gusset Plate - Flexural Rupture Interact | | ratio = | = 0.05 | PASS |
|---|---|-----------------------------|--------|-------------------------------|
| Gusset plate | width $b_p = 14.893$ [in] | thick $t_p = 0.375$ [in] | | |
| | tensile $F_u = 65.0$ [ksi] | | | |
| Net area of plate | $A_n = b_p \times t_p$ | = 5.585 [in ²] | | |
| Plastic modulus of net section | $Z_{net} = (b_p \times t_p^2) / 4$ | = 20.794 [in ³] | | |
| Flexural strength available | $M_c = \phi F_u Z_{net}$ $\phi=0.75$ | = 84.48 [kip-ft] | | |
| Flexural strength required | $M_r =$ from gusset interface forces calc | = 3.09 [kip-ft] | | |
| Shear strength available | $V_c =$ from shear rupture check | = 163.36 [kips] | | |
| Shear strength required | $V_r =$ from gusset interface forces calc | = 34.86 [kips] | | |
| Flexural rupture interaction | ratio = $(\frac{V_r}{V_c})^2 + (\frac{M_r}{M_c})^2$ | = 0.05 | | AISC 14 th Eq 10-5 |
| | | < 1.0 | | OK |

| Gusset to Beam Weld Strength | | ratio = 2.34 / 8.78 | = 0.27 | PASS |
|--|---|---------------------|-------------------------------|----------------------------------|
| Gusset to Beam Interface - Forces | | | | |
| | shear $H_b = 34.86$ [kips] | | axial $V_b = 20.27$ [kips] | in compression |
| | moment $M_b = 3.09$ [kip-ft] | | | |
| Gusset-beam fillet weld length | $L_w =$ | | = 14.893 [in] | |
| Gusset to Beam Interface - Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = V_b / L_{wb}$ | | = 1.361 [kip/in] | in compression |
| Weld stress from shear force | $f_v = H_b / L_{wb}$ | | = 2.341 [kip/in] | |
| Weld stress from moment force | $f_b = \frac{M}{L^2 / 6}$ | | = 1.003 [kip/in] | |
| Weld stress combined - max | $f_{max} = f_v$ | | = 2.341 [kip/in] | AISC 14 th Eq 8-11 |
| Weld resultant load angle | $\theta =$ weld only has shear component | | = 0.0 [°] | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | $w = 5/16$ [in] | | load angle $\theta = 0.0$ [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | | strength coeff $C_1 = 1.00$ | AISC 14 th Table 8-3 |
| Number of weld line | $n = 2$ for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | | = 1.00 | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | | = 18.559 [kip/in] | AISC 14 th Eq 8-1 |
| Base metal - gusset plate | thickness $t = 0.375$ [in] | | tensile $F_u = 65.0$ [ksi] | |
| Base metal - gusset plate is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | AISC 14 th J2.4 |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | | = 14.625 [kip/in] | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | | = 14.625 [kip/in] | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | | = 10.969 [kip/in] | |
| When gusset plate is directly welded to beam or column, apply 1.25 ductility factor to allow adequate force redistribution in the weld group | | | | AISC 14 th Page 13-11 |
| Weld strength used for design after applying ductility factor | $\phi R_n = \phi R_n \times (1/1.25)$ | | = 8.775 [kip/in] | |
| | ratio = 0.27 | | > f_{max} | OK |

| Beam Web Local Yielding | | ratio = 30.23 / 293.01 = 0.10 | | PASS |
|--|--|--------------------------------------|---------------|--------------------------------|
| Gusset Edge Equivalent Normal Force | | | | |
| Refer to AISC DG29 Fig. B-1 for formula below to calculate gusset edge equivalent normal force | | | | |
| Gusset edge axial force | $N =$ | $= 20.27$ | [kips] | |
| Gusset edge moment force | $M =$ | $= 3.09$ | [kip-ft] | |
| Gusset edge interface length | $L =$ | $= 14.893$ | [in] | |
| Gusset edge equivalent normal force | $N_e = N + \frac{4M}{L}$ | $= 30.23$ | [kips] | AISC DG29 Fig B-1 |
| <hr/> | | | | |
| Concentrated force from gusset | $P_u =$ | $= \mathbf{30.23}$ | [kips] | |
| Beam section | $d = 12.100$ | [in] | $t_f = 0.575$ | [in] |
| | $t_w = 0.335$ | [in] | $k = 1.080$ | [in] |
| | yield $F_y = 50.0$ | [ksi] | | |
| <hr/> | | | | |
| Length of bearing | $l_b =$ Gusset/Beam interface length | $= 14.793$ | [in] | |
| Gusset plate corner clip | clip = from user input | $= 0.750$ | [in] | |
| Distance from normal force applied point to member end | $l_N = 0.5 l_b + \text{clip}$ | $= 8.147$ | [in] | |
| | when $l_N \leq d$, use AISC 14 th Eq J10-3 | | | AISC 14 th Eq J10-3 |
| Beam web local yielding strength | $R_n = F_y t_w (2.5 k + l_b)$ | $= 293.01$ | [kips] | AISC 14 th Eq J10-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | |
| | $\phi R_n =$ | $= \mathbf{293.01}$ | [kips] | |
| | ratio = 0.10 | $> P_u$ | OK | |

| Beam Web Local Crippling | | ratio = 30.23 / 279.49 | = 0.11 | PASS |
|--|---|------------------------|---------------|--------------------------------|
| Gusset Edge Equivalent Normal Force | | | | |
| Refer to AISC DG29 Fig. B-1 for formula below to calculate gusset edge equivalent normal force | | | | |
| Gusset edge axial force | N = | = 20.27 | [kips] | |
| Gusset edge moment force | M = | = 3.09 | [kip-ft] | |
| Gusset edge interface length | L = | = 14.893 | [in] | |
| Gusset edge equivalent normal force | $N_e = N + \frac{4M}{L}$ | = 30.23 | [kips] | AISC DG29 Fig B-1 |
| <hr/> | | | | |
| Concentrated force from gusset | $P_u =$ | = 30.23 | [kips] | |
| Beam section | d = 12.100 | [in] | $t_f = 0.575$ | [in] |
| | $t_w = 0.335$ | [in] | k = 1.080 | [in] |
| | yield $F_y = 50.0$ | [ksi] | E = 29000 | [ksi] |
| <hr/> | | | | |
| Length of bearing | $l_b =$ Gusset/Beam interface length | = 14.793 | [in] | |
| Gusset plate corner clip | clip = from user input | = 0.750 | [in] | |
| Distance from normal force applied point to member end | $l_N = 0.5 l_b + \text{clip}$ | = 8.147 | [in] | |
| | when $l_N \geq d/2$, use Eq J10-4 | | | AISC 14 th Eq J10-4 |
| Beam web local crippling strength | $R_n = 0.8 t_w^2 \left[1 + 3 \frac{l_b}{d} \left(\frac{t_w}{t_f} \right)^{1.5} \right] \times \left(\frac{E F_y t_f}{t_w} \right)^{0.5}$ | = 372.65 | [kips] | AISC 14 th Eq J10-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J10.3 |
| | $\phi R_n =$ | = 279.49 | [kips] | |
| | ratio = 0.11 | > P_u | OK | |

Brace Force Load Case 2

Gusset plate t=0.375

P = -50.00 kips (T)

ratio = 0.38

PASS

| Gusset Plate - Shear Yielding | | ratio = 34.86 / 167.55 | = 0.21 | PASS |
|--------------------------------------|------------------------|------------------------|-------------------------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 14.893$ | [in] | thickness $t_p = 0.375$ | [in] |
| Plate yield strength | $F_y = 50.0$ | [ksi] | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 5.585 | [in ²] | |
| Shear force required | $V_u =$ | = 34.86 | [kips] | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 167.55 | [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 167.55 | [kips] | |
| | ratio = 0.21 | > V_u | OK | |

| Gusset Plate - Shear Rupture | | ratio = 34.86 / 163.36 | = 0.21 | PASS |
|-------------------------------------|---------------------------|------------------------------|--------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Plate size | width $b_p = 14.893$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = b_p t_p$ | = 5.585 [in ²] | | |
| Shear force in demand | $V_u =$ | = 34.86 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 217.81 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 163.36 [kips] | | |
| | ratio = 0.21 | > V_u | | OK |

| Gusset Plate - Axial Yield | | ratio = 20.27 / 251.32 | = 0.08 | PASS |
|-------------------------------------|---------------------------|------------------------------|--------|-------------------------------|
| Plate Tensile Yielding Check | | | | |
| Plate size | width $b_p = 14.893$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_g = b_p t_p$ | = 5.585 [in ²] | | |
| Tensile force required | $P_u =$ | = 20.27 [kips] | | |
| Plate tensile yielding strength | $R_n = F_y A_g$ | = 279.24 [kips] | | AISC 14 th Eq J4-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Eq J4-1 |
| | $\phi R_n =$ | = 251.32 [kips] | | |
| | ratio = 0.08 | > P_u | | OK |

| Gusset Plate - Axial Tensile Rupture | | ratio = 20.27 / 272.26 | = 0.07 | PASS |
|---|---------------------------|------------------------------|--------|-------------------------------|
| Plate Tensile Rupture Check | | | | |
| Plate size | width $b_p = 14.893$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in tension | $A_{nt} = b_p t_p$ | = 5.585 [in ²] | | |
| Tensile force required | $P_u =$ | = 20.27 [kips] | | |
| Plate tensile rupture strength | $R_n = F_u A_{nt}$ | = 363.02 [kips] | | AISC 14 th Eq J4-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-2 |
| | $\phi R_n =$ | = 272.26 [kips] | | AISC 14 th Eq J4-2 |
| | ratio = 0.07 | > P_u | | OK |

| Gusset Plate - Flexural Yield Interact | | ratio = | = 0.06 | PASS |
|---|--|-----------------------------|-----------|-------------------------------|
| Gusset plate | width $b_p = 14.893$ [in] | thick $t_p = 0.375$ [in] | | |
| | yield $F_y = 50.0$ [ksi] | | | |
| Shear plate - gross area | $A_g = b_p \times t_p$ | = 5.585 [in ²] | | |
| Shear plate - plastic modulus | $Z_p = (b_p \times t_p^2) / 4$ | = 20.794 [in ³] | | |
| Flexural strength available | $M_c = \phi F_y Z_p \quad \phi=0.90$ | = 77.98 [kip-ft] | | |
| Flexural strength required | $M_r =$ from gusset interface forces calc | = 3.09 [kip-ft] | | |
| Axial strength available | $P_c =$ from axial tensile yield check | = 251.32 [kips] | | |
| Axial strength required | $P_r =$ from gusset interface forces calc | = 20.27 [kips] | | |
| Shear strength available | $V_c =$ from shear yielding check | = 167.55 [kips] | | |
| Shear strength required | $V_r =$ from gusset interface forces calc | = 34.86 [kips] | | |
| Flexural yield interaction | $\text{ratio} = \left(\frac{V_r}{V_c} \right)^2 + \left(\frac{P_r}{P_c} + \frac{M_r}{M_c} \right)^2$ | = 0.06 | | AISC 14 th Eq 10-5 |
| | | < 1.0 | OK | |

| Gusset Plate - Flexural Rupture Interact | | ratio = | = 0.06 | PASS |
|---|--|-----------------------------|-----------|-------------------------------|
| Gusset plate | width $b_p = 14.893$ [in] | thick $t_p = 0.375$ [in] | | |
| | tensile $F_u = 65.0$ [ksi] | | | |
| Net area of plate | $A_n = b_p \times t_p$ | = 5.585 [in ²] | | |
| Plastic modulus of net section | $Z_{net} = (b_p \times t_p^2) / 4$ | = 20.794 [in ³] | | |
| Flexural strength available | $M_c = \phi F_u Z_{net} \quad \phi=0.75$ | = 84.48 [kip-ft] | | |
| Flexural strength required | $M_r =$ from gusset interface forces calc | = 3.09 [kip-ft] | | |
| Axial strength available | $P_c =$ from axial tensile rupture check | = 272.26 [kips] | | |
| Axial strength required | $P_r =$ from gusset interface forces calc | = 20.27 [kips] | | |
| Shear strength available | $V_c =$ from shear rupture check | = 163.36 [kips] | | |
| Shear strength required | $V_r =$ from gusset interface forces calc | = 34.86 [kips] | | |
| Flexural rupture interaction | $\text{ratio} = \left(\frac{V_r}{V_c} \right)^2 + \left(\frac{P_r}{P_c} + \frac{M_r}{M_c} \right)^2$ | = 0.06 | | AISC 14 th Eq 10-5 |
| | | < 1.0 | OK | |

| Gusset to Beam Weld Strength | | ratio = 3.33 / 8.78 | = 0.38 | PASS |
|--|---|---------------------|--------------------------------|---------------------------------|
| Gusset to Beam Interface - Forces | | | | |
| | shear $H_b = 34.86$ [kips] | | axial $V_b = -20.27$ [kips] | in tension |
| | moment $M_b = 3.09$ [kip-ft] | | | |
| Gusset-beam fillet weld length | $L_w =$ | | $= 14.893$ [in] | |
| Gusset to Beam Interface - Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = V_b / L_{wb}$ | | $= -1.361$ [kip/in] | in tension |
| Weld stress from shear force | $f_v = H_b / L_{wb}$ | | $= 2.341$ [kip/in] | |
| Weld stress from moment force | $f_b = \frac{M}{L^2 / 6}$ | | $= 1.003$ [kip/in] | |
| Weld stress combined - max | $f_{max} = [(f_a - f_b)^2 + f_v^2]^{0.5}$ | | $= 3.327$ [kip/in] | AISC 14 th Eq 8-11 |
| Weld resultant load angle | $\theta = \tan^{-1} [(f_b - f_a) / f_v]$ | | $= 45.3$ [°] | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | $w = 5/16$ [in] | | load angle $\theta = 45.3$ [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | | strength coeff $C_1 = 1.00$ | AISC 14 th Table 8-3 |
| Number of weld line | $n = 2$ for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | | $= 1.30$ | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | | $= 24.117$ [kip/in] | AISC 14 th Eq 8-1 |
| Base metal - gusset plate | thickness $t = 0.375$ [in] | | tensile $F_u = 65.0$ [ksi] | |
| Base metal - gusset plate is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | | $= 14.625$ [kip/in] | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | | $= 14.625$ [kip/in] | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | | $= 10.969$ [kip/in] | |
| When gusset plate is directly welded to beam or column, apply 1.25 ductility factor to allow adequate force redistribution in the weld group | | | | |
| Weld strength used for design after applying ductility factor | $\phi R_n = \phi R_n \times (1/1.25)$ | | $= 8.775$ [kip/in] | |
| | ratio = 0.38 | | $> f_{max}$ | OK |

| Beam Web Local Yielding | | ratio = 30.23 / 293.01 = 0.10 | | PASS |
|--|--|--------------------------------------|---------------|--------------------------------|
| Gusset Edge Equivalent Normal Force | | | | |
| Refer to AISC DG29 Fig. B-1 for formula below to calculate gusset edge equivalent normal force | | | | |
| Gusset edge axial force | $N =$ | $= -20.27$ | [kips] | |
| Gusset edge moment force | $M =$ | $= 3.09$ | [kip-ft] | |
| Gusset edge interface length | $L =$ | $= 14.893$ | [in] | |
| Gusset edge equivalent normal force | $N_e = N - \frac{4M}{L}$ | $= -30.23$ | [kips] | AISC DG29 Fig B-1 |
| <hr/> | | | | |
| Concentrated force from gusset | $P_u =$ | $= \mathbf{30.23}$ | [kips] | |
| Beam section | $d = 12.100$ | [in] | $t_f = 0.575$ | [in] |
| | $t_w = 0.335$ | [in] | $k = 1.080$ | [in] |
| | yield $F_y = 50.0$ | [ksi] | | |
| <hr/> | | | | |
| Length of bearing | $l_b =$ Gusset/Beam interface length | $= 14.793$ | [in] | |
| Gusset plate corner clip | clip = from user input | $= 0.750$ | [in] | |
| Distance from normal force applied point to member end | $l_N = 0.5 l_b + \text{clip}$ | $= 8.147$ | [in] | |
| | when $l_N \leq d$, use AISC 14 th Eq J10-3 | | | AISC 14 th Eq J10-3 |
| Beam web local yielding strength | $R_n = F_y t_w (2.5 k + l_b)$ | $= 293.01$ | [kips] | AISC 14 th Eq J10-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | |
| | $\phi R_n =$ | $= \mathbf{293.01}$ | [kips] | |
| | ratio = 0.10 | $> P_u$ | OK | |

Beam to Column

End Plate Connection

Code=AISC 360-10 LRFD

Result Summarygeometries & weld limitations = **PASS**limit states max ratio = **0.94** **PASS****Geometry Restriction Check - End Plate to Column Web****PASS****Min Bolt Edge Distance - End Plate to Column Web**

| | | | |
|--|---------------|---------------------|----------------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min edge distance allowed | $L_{e-min} =$ | = 1.000 [in] | AISC 14 th Table J3.4 |
| Min edge distance in End Plate to Column Web | $L_e =$ | = 1.375 [in] | |
| | | > L_{e-min} | OK |

Min Bolt Spacing - End Plate to Column Web

| | | | |
|---|-------------------------|---------------------|----------------------------|
| Bolt diameter | $d_b =$ | = 0.750 [in] | |
| Min bolt spacing allowed | $L_{s-min} = 2.667 d_b$ | = 2.000 [in] | AISC 14 th J3.3 |
| Min Bolt spacing in End Plate to Column Web | $L_s =$ | = 3.000 [in] | |
| | | > L_{s-min} | OK |

Beam Flange Fillet Weld Limitation**PASS****Min Fillet Weld Size**

| | | | |
|-------------------------------|-------------|---------------------|----------------------------------|
| Thinner part joined thickness | $t =$ | = 0.375 [in] | |
| Min fillet weld size allowed | $w_{min} =$ | = 0.188 [in] | AISC 14 th Table J2.4 |
| Fillet weld size provided | $w =$ | = 0.375 [in] | |
| | | > w_{min} | OK |

Min Fillet Weld Length

| | | | |
|--------------------------------|------------------------|---------------------|-----------------------------|
| Fillet weld size provided | $w =$ | = 0.375 [in] | |
| Min fillet weld length allowed | $L_{min} = 4 \times w$ | = 1.500 [in] | AISC 14 th J2.2b |
| Min fillet weld length | $L = 0.5 b_f - k_1$ | = 2.437 [in] | |
| | | > L_{min} | OK |

Beam Web Fillet Weld Limitation**PASS****Min Fillet Weld Size**

| | | | |
|-------------------------------|-------------|---------------------|----------------------------------|
| Thinner part joined thickness | $t =$ | = 0.335 [in] | |
| Min fillet weld size allowed | $w_{min} =$ | = 0.188 [in] | AISC 14 th Table J2.4 |
| Fillet weld size provided | $w =$ | = 0.375 [in] | |
| | | > w_{min} | OK |

Min Fillet Weld Length

| | | | |
|--------------------------------|------------------------|---------------------|-----------------------------|
| Fillet weld size provided | $w =$ | = 0.375 [in] | |
| Min fillet weld length allowed | $L_{min} = 4 \times w$ | = 1.500 [in] | AISC 14 th J2.2b |
| Min fillet weld length | $L = d - 2 k$ | = 9.350 [in] | |
| | | > L_{min} | OK |

Brace Force Load Case 1

shear V = -35.82 kips axial P = -14.50 kips (T)

ratio = **0.41** **PASS**

| | | | | |
|-------------------------------------|------------------------|------------------------|--------------------|-------------------------------|
| Beam - Shear Yielding - Vy | | ratio = 35.82 / 121.61 | = 0.29 | PASS |
| Section Shear Yielding Check | | | | |
| Sect yield strength | $F_y = 50.0$ [ksi] | | | |
| Sect gross area in shear | $A_{gv} =$ | = 4.054 | [in ²] | |
| Shear force required | $V_u =$ | = 35.82 | [kips] | |
| Sect shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 121.61 | [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 121.61 | [kips] | |
| | ratio = 0.29 | > V_u | OK | |
| Beam - Shear Rupture - Vy | | ratio = 35.82 / 118.56 | = 0.30 | PASS |
| Section Shear Rupture Check | | | | |
| Sect tensile strength | $F_u = 65.0$ [ksi] | | | |
| Sect net area in shear | $A_{nv} =$ | = 4.054 | [in ²] | |
| Shear force in demand | $V_u =$ | = 35.82 | [kips] | |
| Sect shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 158.09 | [kips] | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 118.56 | [kips] | |
| | ratio = 0.30 | > V_u | OK | |
| Beam - Shear Yielding - Vz | | ratio = 25.00 / 277.73 | = 0.09 | PASS |
| Section Shear Yielding Check | | | | |
| Sect yield strength | $F_y = 50.0$ [ksi] | | | |
| Sect gross area in shear | $A_{gv} =$ | = 9.258 | [in ²] | |
| Shear force required | $V_u =$ | = 25.00 | [kips] | |
| Sect shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 277.73 | [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 277.73 | [kips] | |
| | ratio = 0.09 | > V_u | OK | |
| Beam - Shear Rupture - Vz | | ratio = 25.00 / 270.78 | = 0.09 | PASS |
| Section Shear Rupture Check | | | | |
| Sect tensile strength | $F_u = 65.0$ [ksi] | | | |
| Sect net area in shear | $A_{nv} =$ | = 9.258 | [in ²] | |
| Shear force in demand | $V_u =$ | = 25.00 | [kips] | |
| Sect shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 361.04 | [kips] | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 270.78 | [kips] | |
| | ratio = 0.09 | > V_u | OK | |

| Beam - Axial Tensile Yield - Px | | ratio = 14.50 / 589.50 | = 0.02 | PASS |
|--|---------------------|------------------------|--------------------|-------------------------------|
| Gross area subject to tension | $A_g =$ | = 13.100 | [in ²] | |
| Steel yield strength | $F_y =$ | = 50.0 | [ksi] | |
| Tensile force required | $P_u =$ | = 14.50 | [kips] | |
| Tensile yielding strength | $R_n = F_y A_g$ | = 655.00 | [kips] | AISC 14 th Eq D2-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th D2 (a) |
| | $\phi R_n =$ | = 589.50 | [kips] | AISC 14 th Eq D2-1 |
| | ratio = 0.02 | > P_u | OK | |

| Beam - Axial Tensile Rupture - Px | | ratio = 14.50 / 638.63 | = 0.02 | PASS |
|--|---------------------|------------------------|--------------------|-------------------------------|
| Tensile force required | $P_u =$ | = 14.50 | [kips] | |
| Tensile effective net area | $A_e = A_n U$ | = 13.100 | [in ²] | |
| Plate tensile strength | $F_u =$ | = 65.0 | [ksi] | |
| Tensile rupture strength | $R_n = F_u A_e$ | = 851.50 | [kips] | AISC 14 th Eq D2-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th D2 (b) |
| | $\phi R_n =$ | = 638.63 | [kips] | AISC 14 th Eq D2-2 |
| | ratio = 0.02 | > P_u | OK | |

| End Plate - Shear Yielding - Vy | | ratio = 17.91 / 136.13 | = 0.13 | PASS | |
|--|------------------------|------------------------|-------------------------|--------------------|-------------------------------|
| Plate Shear Yielding Check | | | | | |
| Plate size | width $b_p = 12.100$ | [in] | thickness $t_p = 0.375$ | [in] | |
| Plate yield strength | $F_y = 50.0$ | [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | | = 4.538 | [in ²] | |
| Shear force required | $V_u =$ | | = 17.91 | [kips] | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | | = 136.13 | [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | | = 136.13 | [kips] | |
| | ratio = 0.13 | > V_u | OK | | |

| End Plate - Shear Rupture - Vy | | ratio = 17.91 / 103.93 | = 0.17 | PASS | |
|---------------------------------------|------------------------------|------------------------|---------------------------|--------------------|-------------------------------|
| Plate Shear Rupture Check | | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ | [in] | bolt hole dia $d_n = 7/8$ | [in] | AISC 14 th B4.3b |
| Number of bolt | $n = 3$ | | | | |
| Plate size | width $b_p = 12.100$ | [in] | thickness $t_p = 0.375$ | [in] | |
| Plate tensile strength | $F_u = 65.0$ | [ksi] | | | |
| Plate net area in shear | $A_{nv} = (b_p - n d_n) t_p$ | | = 3.553 | [in ²] | |
| Shear force required | $V_u =$ | | = 17.91 | [kips] | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | | = 138.57 | [kips] | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | | = 103.93 | [kips] | |
| | ratio = 0.17 | > V_u | OK | | |

| End Plate - Shear Yielding - Vz | | ratio = 12.50 / 75.94 | = 0.16 | PASS |
|--|------------------------------|--------------------------------|--------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 6.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.531 [in ²] | | |
| Shear force required | $V_u =$ | = 12.50 [kips] | | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 75.94 [kips] | | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 75.94 [kips] | | |
| | ratio = 0.16 | > V_u | | OK |
| End Plate - Shear Rupture - Vz | | ratio = 12.50 / 54.84 | = 0.23 | PASS |
| Plate Shear Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 6.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = (b_p - n d_h) t_p$ | = 1.875 [in ²] | | |
| Shear force required | $V_u =$ | = 12.50 [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 73.13 [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 54.84 [kips] | | |
| | ratio = 0.23 | > V_u | | OK |

| End Plate - Bolt Bearing on End Plate - Vy Vz Combined | | ratio = 43.68 / 107.35 | = 0.41 | PASS |
|--|--|--------------------------------|--------------------|----------------------------------|
| The bolt group is oriented so that the shear V_y is in ver. direction and the shear V_z is in hor. direction | | | | |
| Bolt group forces | shear $V_y = -35.82$ [kips] | shear $V_z = 25.00$ | [kips] | |
| Bolt group resultant force | $R = (V_y^2 + V_z^2)^{0.5}$ | = 43.68 | [kips] | |
| Resultant force/hor line load angle | $\theta = \tan^{-1}(V_y/V_z)$ | = 55.09 | [°] | |
| <hr/> | | | | |
| Bolt hole diameter | bolt dia $d_b = 0.750$ [in] | bolt hole dia $d_{bh} = 0.813$ | [in] | AISC 14 th B4.3b |
| Bolt hole ver. dimension | $d_v =$ | = 0.813 | [in] | |
| Bolt hole hor. dimension | $d_h =$ | = 0.813 | [in] | |
| Bolt center to bolt hole edge dist | $d_c = 0.5 d_{bh}$ | = 0.406 | [in] | |
| <hr/> | | | | |
| Bolt no in ver & hor direction | Bolt Row $n_v = 3$ | Bolt Col $n_h = 2$ | | |
| Bolt spacing | ver $s_v = 3.000$ [in] | hor $s_h = 4.000$ | [in] | |
| Bolt edge distance | ver $e_v = 10.425$ [in] | hor $e_h = 1.375$ | [in] | |
| <hr/> | | | | |
| Bolt clear dist - bot right corner bolt | $L_{cA} = \min\left(\frac{e_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$ | = 1.996 | [in] | |
| Bolt clear dist - right side edge bolt | $L_{cB} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$ | = 1.996 | [in] | |
| Bolt clear dist - bot side edge bolt | $L_{cC} = \min\left(\frac{e_v}{\sin \theta}, \frac{s_h - 0.5d_v}{\cos \theta}\right) - d_c$ | = 5.873 | [in] | |
| Bolt clear dist - inner edge bolt | $L_{cD} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{s_h - 0.5d_v}{\cos \theta}\right) - d_c$ | = 2.757 | [in] | |
| <hr/> | | | | |
| Single Bolt Shear Strength | | | | |
| <hr/> | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ | [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ | [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 | [kips] | AISC 14 th Eq J3-1 |
| <hr/> | | | | |
| Bolt bearing on plate | thick $t = 0.375$ [in] | tensile $F_u = 65.0$ | [ksi] | |
| Bolt bearing strength | $R_{n-br} = 3.0 d_b t F_u$ | = 54.84 | [kips] | AISC 14 th Eq J3-6b |
| <hr/> | | | | |
| Type A - Bolt Group Bottom Right Corner Bolt | | | | |
| Number of bolt | $n_A = 1$ | | | |
| Bolt tear out strength | $R_{n-tA} = 1.5 L_{cA} t F_u$ | = 72.99 | [kips] | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nA} = \min(R_{n-tA}, R_{n-br}, R_{n-bolt})$ | = 23.86 | [kips] | |
| <hr/> | | | | |
| Type B - Bolt Group Right Side Edge Bolt | | | | |
| Number of bolt | $n_B = 2$ | | | |
| Bolt tear out strength | $R_{n-tB} = 1.5 L_{cB} t F_u$ | = 72.99 | [kips] | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nB} = \min(R_{n-tB}, R_{n-br}, R_{n-bolt})$ | = 23.86 | [kips] | |
| <hr/> | | | | |
| Type C - Bolt Group Bottom Side Edge Bolt | | | | |
| Number of bolt | $n_C = 1$ | | | |
| Bolt tear out strength | $R_{n-tC} = 1.5 L_{cC} t F_u$ | = 214.73 | [kips] | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nC} = \min(R_{n-tC}, R_{n-br}, R_{n-bolt})$ | = 23.86 | [kips] | |
| <hr/> | | | | |
| Type D - Bolt Group Inner Edge Bolt | | | | |
| Number of bolt | $n_D = 2$ | | | |
| Bolt tear out strength | $R_{n-tD} = 1.5 L_{cD} t F_u$ | = 100.79 | [kips] | AISC 14 th Eq J3-6b |

| End Plate - Bolt Bearing on Column Web - Vy Vz Combined | | ratio = 43.68 / 107.35 | = 0.41 | PASS |
|--|--|--|--------|----------------------------------|
| The bolt group is oriented so that the shear V_y is in ver. direction and the shear V_z is in hor. direction | | | | |
| Bolt group forces | shear $V_y = -35.82$ [kips] | shear $V_z = 25.00$ [kips] | | |
| Bolt group resultant force | $R = (V_y^2 + V_z^2)^{0.5}$ | = 43.68 [kips] | | |
| Resultant force/hor line load angle | $\theta = \tan^{-1}(V_y/V_z)$ | = 55.09 [°] | | |
| <hr/> | | | | |
| Bolt hole diameter | bolt dia $d_b = 0.750$ [in] | bolt hole dia $d_{bh} = 0.813$ [in] | | AISC 14 th B4.3b |
| Bolt hole ver. dimension | $d_v =$ | = 0.813 [in] | | |
| Bolt hole hor. dimension | $d_h =$ | = 0.813 [in] | | |
| Bolt center to bolt hole edge dist | $d_c = 0.5 d_{bh}$ | = 0.406 [in] | | |
| <hr/> | | | | |
| Bolt no in ver & hor direction | Bolt Row $n_v = 3$ | Bolt Col $n_h = 2$ | | |
| Bolt spacing | ver $s_v = 3.000$ [in] | hor $s_h = 4.000$ [in] | | |
| Bolt edge distance | ver $e_v = 10.425$ [in] | hor $e_h = 1.375$ [in] | | |
| <hr/> | | | | |
| Bolt clear dist - bot right corner bolt | $L_{cA} = \min\left(\frac{e_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$ | = 1.996 [in] | | |
| Bolt clear dist - right side edge bolt | $L_{cB} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$ | = 1.996 [in] | | |
| Bolt clear dist - bot side edge bolt | $L_{cC} = \min\left(\frac{e_v}{\sin \theta}, \frac{s_h - 0.5d_v}{\cos \theta}\right) - d_c$ | = 5.873 [in] | | |
| Bolt clear dist - inner edge bolt | $L_{cD} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{s_h - 0.5d_v}{\cos \theta}\right) - d_c$ | = 2.757 [in] | | |
| <hr/> | | | | |
| Single Bolt Shear Strength | | | | |
| <hr/> | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 [kips] | | AISC 14 th Eq J3-1 |
| <hr/> | | | | |
| Bolt bearing on plate | thick $t = 0.295$ [in] | tensile $F_u = 65.0$ [ksi] | | |
| Bolt bearing strength | $R_{n-br} = 3.0 d_b t F_u$ | = 43.14 [kips] | | AISC 14 th Eq J3-6b |
| <hr/> | | | | |
| Type A - Bolt Group Bottom Right Corner Bolt | | | | |
| Number of bolt | $n_A = 1$ | | | |
| Bolt tear out strength | $R_{n-tA} = 1.5 L_{cA} t F_u$ | = 57.42 [kips] | | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nA} = \min(R_{n-tA}, R_{n-br}, R_{n-bolt})$ | = 23.86 [kips] | | |
| <hr/> | | | | |
| Type B - Bolt Group Right Side Edge Bolt | | | | |
| Number of bolt | $n_B = 2$ | | | |
| Bolt tear out strength | $R_{n-tB} = 1.5 L_{cB} t F_u$ | = 57.42 [kips] | | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nB} = \min(R_{n-tB}, R_{n-br}, R_{n-bolt})$ | = 23.86 [kips] | | |
| <hr/> | | | | |
| Type C - Bolt Group Bottom Side Edge Bolt | | | | |
| Number of bolt | $n_C = 1$ | | | |
| Bolt tear out strength | $R_{n-tC} = 1.5 L_{cC} t F_u$ | = 168.92 [kips] | | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nC} = \min(R_{n-tC}, R_{n-br}, R_{n-bolt})$ | = 23.86 [kips] | | |
| <hr/> | | | | |
| Type D - Bolt Group Inner Edge Bolt | | | | |
| Number of bolt | $n_D = 2$ | | | |
| Bolt tear out strength | $R_{n-tD} = 1.5 L_{cD} t F_u$ | = 79.29 [kips] | | AISC 14 th Eq J3-6b |

| End Plate - Shear in Vy - Block Shear - Center Strip | | ratio = 35.82 / 334.30 | = 0.11 | PASS |
|---|--|--------------------------------|--------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 3$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 10.425$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 12.319 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 10.678 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 1.172 [in ²] | | |
| Block shear strength required | $V_u =$ | = 35.82 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 445.73 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 334.30 [kips] | | |
| | ratio = 0.11 | > V_u | OK | |

| End Plate - Shear in Vy - Block Shear - 2-Side Strip | | ratio = 35.82 / 311.45 | = 0.12 | PASS |
|--|--|--------------------------------|--------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 3$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 10.425$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 12.319 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 10.678 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 0.703 [in ²] | | |
| Block shear strength required | $V_u =$ | = 35.82 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 415.27 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 311.45 [kips] | | |
| | ratio = 0.12 | > V_u | OK | |

| End Plate - Shear in Vz - Block Shear - Center Strip | | ratio = 25.00 / 166.82 | = 0.15 | PASS |
|---|--|--------------------------------|--------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 3$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 4.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 10.425$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 4.031 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 3.047 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 1.594 [in ²] | | |
| Block shear strength required | $V_u =$ | = 25.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 222.42 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 166.82 [kips] | | |
| | ratio = 0.15 | > V_u | OK | |

| End Plate - Shear in Vz - Block Shear - 2-Side Strip | | ratio = 25.00 / 454.29 | = 0.06 | PASS |
|--|--|--------------------------------|--------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 3$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 4.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 10.425$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 4.031 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 3.047 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 7.491 [in ²] | | |
| Block shear strength required | $V_u =$ | = 25.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 605.72 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 454.29 [kips] | | |
| | ratio = 0.06 | > V_u | OK | |

| End Plate / Column Web - Bolt Shear | | ratio = 43.68 / 107.35 | = 0.41 | PASS |
|-------------------------------------|---------------------------------|--|--------|----------------------------------|
| Bolt group forces | shear $V_y = -35.82$ [kips] | shear $V_z = 25.00$ [kips] | | |
| Shear resultant force | $R = (V_y^2 + V_z^2)^{0.5}$ | = 43.68 [kips] | | |
| Bolt shear stress | grade = A325-N | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Number of bolt carried shear | $n_s = 6.0$ | shear plane $m = 1$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 43.68 [kips] | | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 143.14 [kips] | | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 107.35 [kips] | | |
| | ratio = 0.41 | > V_u | | OK |

| Bolt Tensile Prying Action on End Plate | | ratio = 2.42 / 7.32 | = 0.33 | PASS |
|---|---|--|-----------|----------------------------------|
| Bolt group forces | shear V = 43.68 [kips] | axial P = -14.50 [kips] | | |
| Single Bolt Tensile Capacity Without Considering Prying | | | | |
| Bolt grade | grade = A325-N | | | |
| Nominal tensile/shear stress | $F_{nt} = 90.0$ [ksi] | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Bolt group shear force | shear V = 43.68 [kips] | no of bolt n = 6 | | |
| Shear stress required | $f_{rv} = V / (n A_b)$ | = 16.48 [ksi] | | |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3.7 |
| Modified nominal tensile stress | $F'_{nt} = 1.3 F_{nt} - \frac{F_{nt}}{\phi F_{nv}} f_{rv} \leq F_{nt}$ | = 80.38 [ksi] | | AISC 14 th Eq J3-3a |
| Bolt nominal tensile strength | $r_n = F'_{nt} A_b$ | = 35.51 [kips] | | AISC 14 th Eq J3-1 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3.6 |
| Single bolt tensile capacity | $\phi r_n =$ | = 26.63 [kips] | | |
| Single Bolt Tensile Capacity After Considering Prying | | | | |
| End plate | width w = 6.750 [in] | bolt gage g = 4.000 [in] | | |
| | web $t_w = 0.335$ [in] | | | |
| Dist from bolt center to plate edge | $a = 0.5 (w - g)$ | = 1.375 [in] | | |
| | $a' = a + 0.5 d_b \leq (1.25 b + 0.5 d_b)$ | = 1.750 [in] | | AISC 14 th Eq 9-27 |
| Bolt hole diameter | bolt dia $d_b = 0.750$ [in] | bolt hole dia $d_h = 0.813$ [in] | | AISC 14 th B4.3b |
| Dist from bolt center to face of web | $b = 0.5(g - t_w)$ | = 1.833 [in] | | |
| | $b' = b - 0.5 d_b$ | = 1.458 [in] | | AISC 14 th Eq 9-21 |
| Bolt pitch spacing | $s_v = 3.000$ | | | |
| Bolt tributary length | $p = s_v$ $p \leq 2b$ and $p \leq s_v$ | = 3.000 [in] | | AISC 14 th Page 9-11 |
| | $\rho = b' / a'$ | = 0.833 | | AISC 14 th Eq 9-26 |
| | $\delta = 1 - d_h / p$ | = 0.729 | | AISC 14 th Eq 9-24 |
| Tensile capacity per bolt before considering prying | B = from calc shown in above section | = 26.63 [kips] | | |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Page 9-10 |
| End plate thickness | t = 0.375 [in] | tensile $F_u = 65.0$ [ksi] | | |
| Plate thickness req'd to develop bolt tensile capacity without prying | $t_c = \left(\frac{4 B b'}{\phi p F_u} \right)^{0.5}$ | = 0.941 [in] | | AISC 14 th Eq 9-30a |
| | $\alpha' = \frac{1}{\delta (1 + \rho)} \left[\left(\frac{t_c}{t} \right)^2 - 1 \right]$ | = 3.959 | | AISC 14 th Eq 9-35 |
| when $\alpha' > 1$ | $Q = \left(\frac{t}{t_c} \right)^2 (1 + \delta)$ | = 0.275 | | AISC 14 th Eq 9-34 |
| Bolt tensile force per bolt in demand | T = from calc shown below | = 2.42 [kips] | | |
| Tensile strength per bolt after considering prying | $\phi r_n = B \times Q$ | = 7.32 [kips] | | AISC 14 th Eq 9-31 |
| | ratio = 0.33 | > T | OK | |
| Calculate Max Single Bolt Tensile Load | | | | |
| Bolt group force | axial P = 14.50 [kips] | | | |
| Bolt number | Bolt Row $n_h = 2$ | Bolt Col $n_v = 3$ | | |
| Bolt tensile force per bolt | $T = P / (n_v n_h)$ | = 2.42 [kips] | | |

| Beam Flange Weld Strength | | ratio = 2.49 / 16.82 | = 0.15 | PASS |
|--|---|--------------------------------|---------------------------------|-------------|
| Assume all axial tensile force P carried by flange weld | | | | |
| Beam section W12X45 | $b_{fb} = 8.050$ [in] | $k_{1b} = 0.938$ [in] | | |
| Fillet weld length - double fillet | $L = [b_{fb} + (b_{fb} - 2k_{1b})] / 2$ as dbl fillet | | = 5.812 [in] | |
| Weld Group Forces | | | | |
| | shear V = 12.50 [kips] | axial P = -7.25 [kips] | in tension | |
| Beam flg-end plate weld length | L = | = 5.812 [in] | | |
| Beam flg-end plate fillet weld size | w = | = 0.375 [in] | | |
| Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = P / L$ | = -1.247 [kip/in] | in tension | |
| Weld stress from shear force | $f_v = V / L$ | = 2.151 [kip/in] | | |
| Weld stress combined - max | $f_{max} = (f_a^2 + f_v^2)^{0.5}$ | = 2.486 [kip/in] | AISC 14 th Eq 8-11 | |
| Weld stress load angle | $\theta = \tan^{-1} \left(\frac{f_a}{f_v} \right)$ | = 30.1 [°] | | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | $w = \frac{3}{8}$ [in] | load angle $\theta = 30.1$ [°] | | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | strength coeff $C_1 = 1.00$ | AISC 14 th Table 8-3 | |
| Number of weld line | n = 2 for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | = 1.18 | AISC 14 th Page 8-9 | |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | = 26.228 [kip/in] | AISC 14 th Eq 8-1 | |
| Base metal - beam flange | thickness t = 0.575 [in] | tensile $F_u = 65.0$ [ksi] | | |
| Base metal - beam flange is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | AISC 14 th J2.4 | |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | = 22.425 [kip/in] | AISC 14 th Eq J4-4 | |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | = 22.425 [kip/in] | AISC 14 th Eq 9-2 | |
| Resistance factor-LRFD | $\phi = 0.75$ | | AISC 14 th Eq 8-1 | |
| | $\phi R_n =$ | = 16.819 [kip/in] | | |
| | ratio = 0.15 | > f_{max} | OK | |

| Beam Web Weld Strength | | ratio = 35.82 / 91.62 | = 0.39 | PASS |
|--|---|-----------------------------|-----------|---------------------------------|
| Assume tensile force carried by flange weld and shear force carried by web weld, so there will be no combined weld tensile/shear stress required | | | | |
| Web weld shear force required | $V_u =$ from gusset interface force calc | = 35.82 | [kips] | |
| Beam section W12X45 | $d_b = 12.100$ [in] | $k_b = 1.375$ | [in] | |
| Fillet weld length on beam web | $L = d_b - 2 k_b$ | = 9.350 | [in] | |
| Fillet Weld Strength Check | | | | |
| Fillet weld leg size | $w = 3/8$ [in] | load angle $\theta = 0.0$ | [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | strength coeff $C_1 = 1.00$ | | AISC 14 th Table 8-3 |
| Number of weld line | $n = 2$ for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | = 1.00 | | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | = 22.271 | [kip/in] | AISC 14 th Eq 8-1 |
| Base metal - beam web | thickness $t = 0.335$ [in] | tensile $F_u = 65.0$ | [ksi] | |
| Base metal - beam web is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked AISC 14 th J2.4 | | | | |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | = 13.065 | [kip/in] | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | = 13.065 | [kip/in] | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | = 9.799 | [kip/in] | |
| Shear resistance required | $V_u =$ | = 35.82 | [kips] | |
| Fillet weld length - double fillet | $L =$ | = 9.350 | [in] | |
| Shear resistance provided | $\phi F_n = \phi R_n \times L$ | = 91.62 | [kips] | |
| | ratio = 0.39 | > V_u | OK | |

Brace Force Load Case 2shear $V = 85.82$ kips axial $P = -15.50$ kips (T)ratio = 0.94 **PASS**

| Beam - Shear Yielding - Vy | | ratio = 85.82 / 121.61 | = 0.71 | PASS |
|-------------------------------------|------------------------|------------------------|--------------------|-------------------------------|
| Section Shear Yielding Check | | | | |
| Sect yield strength | $F_y = 50.0$ [ksi] | | | |
| Sect gross area in shear | $A_{gv} =$ | = 4.054 | [in ²] | |
| Shear force required | $V_u =$ | = 85.82 | [kips] | |
| Sect shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 121.61 | [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 121.61 | [kips] | |
| | ratio = 0.71 | > V_u | OK | |

| | | | | |
|--|------------------------|------------------------|--------------------|-------------------------------|
| Beam - Shear Rupture - Vy | | ratio = 85.82 / 118.56 | = 0.72 | PASS |
| Section Shear Rupture Check | | | | |
| Sect tensile strength | $F_u = 65.0$ [ksi] | | | |
| Sect net area in shear | $A_{nv} =$ | = 4.054 | [in ²] | |
| Shear force in demand | $V_u =$ | = 85.82 | [kips] | |
| Sect shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 158.09 | [kips] | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 118.56 | [kips] | |
| | ratio = 0.72 | > V_u | OK | |
| Beam - Shear Yielding - Vz | | ratio = 25.00 / 277.73 | = 0.09 | PASS |
| Section Shear Yielding Check | | | | |
| Sect yield strength | $F_y = 50.0$ [ksi] | | | |
| Sect gross area in shear | $A_{gv} =$ | = 9.258 | [in ²] | |
| Shear force required | $V_u =$ | = 25.00 | [kips] | |
| Sect shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 277.73 | [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 277.73 | [kips] | |
| | ratio = 0.09 | > V_u | OK | |
| Beam - Shear Rupture - Vz | | ratio = 25.00 / 270.78 | = 0.09 | PASS |
| Section Shear Rupture Check | | | | |
| Sect tensile strength | $F_u = 65.0$ [ksi] | | | |
| Sect net area in shear | $A_{nv} =$ | = 9.258 | [in ²] | |
| Shear force in demand | $V_u =$ | = 25.00 | [kips] | |
| Sect shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 361.04 | [kips] | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 270.78 | [kips] | |
| | ratio = 0.09 | > V_u | OK | |
| Beam - Axial Tensile Yield - Px | | ratio = 15.50 / 589.50 | = 0.03 | PASS |
| Gross area subject to tension | $A_g =$ | = 13.100 | [in ²] | |
| Steel yield strength | $F_y =$ | = 50.0 | [ksi] | |
| Tensile force required | $P_u =$ | = 15.50 | [kips] | |
| Tensile yielding strength | $R_n = F_y A_g$ | = 655.00 | [kips] | AISC 14 th Eq D2-1 |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th D2 (a) |
| | $\phi R_n =$ | = 589.50 | [kips] | AISC 14 th Eq D2-1 |
| | ratio = 0.03 | > P_u | OK | |

| Beam - Axial Tensile Rupture - P_x | | ratio = 15.50 / 638.63 | = 0.02 | PASS |
|---|-----------------|------------------------|--------------------|-------------------------------|
| Tensile force required | $P_u =$ | = 15.50 | [kips] | |
| Tensile effective net area | $A_e = A_n U$ | = 13.100 | [in ²] | |
| Plate tensile strength | $F_u =$ | = 65.0 | [ksi] | |
| Tensile rupture strength | $R_n = F_u A_e$ | = 851.50 | [kips] | AISC 14 th Eq D2-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th D2 (b) |
| | $\phi R_n =$ | = 638.63 | [kips] | AISC 14 th Eq D2-2 |
| | ratio = 0.02 | > P_u | OK | |

| End Plate - Shear Yielding - V_y | | ratio = 42.91 / 136.13 | = 0.32 | PASS |
|---|---------------------------|------------------------------|--------------------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 12.100$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 4.538 | [in ²] | |
| Shear force required | $V_u =$ | = 42.91 | [kips] | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 136.13 | [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 136.13 | [kips] | |
| | ratio = 0.32 | > V_u | OK | |

| End Plate - Shear Rupture - V_y | | ratio = 42.91 / 103.93 | = 0.41 | PASS |
|--|------------------------------|--------------------------------|--------------------|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_n = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 3$ | | | |
| Plate size | width $b_p = 12.100$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = (b_p - n d_n) t_p$ | = 3.553 | [in ²] | |
| Shear force required | $V_u =$ | = 42.91 | [kips] | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | = 138.57 | [kips] | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | = 103.93 | [kips] | |
| | ratio = 0.41 | > V_u | OK | |

| End Plate - Shear Yielding - V_z | | ratio = 12.50 / 75.94 | = 0.16 | PASS |
|---|--------------------------|------------------------------|--------------------|-------------------------------|
| Plate Shear Yielding Check | | | | |
| Plate size | width $b_p = 6.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate yield strength | $F_y = 50.0$ [ksi] | | | |
| Plate gross area in shear | $A_{gv} = b_p t_p$ | = 2.531 | [in ²] | |
| Shear force required | $V_u =$ | = 12.50 | [kips] | |
| Plate shear yielding strength | $R_n = 0.6 F_y A_{gv}$ | = 75.94 | [kips] | AISC 14 th Eq J4-3 |
| Resistance factor-LRFD | $\phi = 1.00$ | | | AISC 14 th Eq J4-3 |
| | $\phi R_n =$ | = 75.94 | [kips] | |
| | ratio = 0.16 | > V_u | OK | |

| End Plate - Shear Rupture - Vz | | ratio = 12.50 / 54.84 = 0.23 | | PASS |
|----------------------------------|------------------------------|--------------------------------|----|-------------------------------|
| Plate Shear Rupture Check | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Number of bolt | $n = 2$ | | | |
| Plate size | width $b_p = 6.750$ [in] | thickness $t_p = 0.375$ [in] | | |
| Plate tensile strength | $F_u = 65.0$ [ksi] | | | |
| Plate net area in shear | $A_{nv} = (b_p - n d_h) t_p$ | $= 1.875$ [in ²] | | |
| Shear force required | $V_u =$ | $= 12.50$ [kips] | | |
| Plate shear rupture strength | $R_n = 0.6 F_u A_{nv}$ | $= 73.13$ [kips] | | AISC 14 th Eq J4-4 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-4 |
| | $\phi R_n =$ | $= 54.84$ [kips] | | |
| | ratio = 0.23 | $> V_u$ | OK | |

| End Plate - Bolt Bearing on End Plate - Vy Vz Combined | | ratio = 89.39 / 107.35 | = 0.83 | PASS |
|--|--|------------------------|--|----------------------------------|
| The bolt group is oriented so that the shear V_y is in ver. direction and the shear V_z is in hor. direction | | | | |
| Bolt group forces | shear $V_y = 85.82$ [kips] | | shear $V_z = 25.00$ [kips] | |
| Bolt group resultant force | $R = (V_y^2 + V_z^2)^{0.5}$ | | = 89.39 [kips] | |
| Resultant force/hor line load angle | $\theta = \tan^{-1}(V_y/V_z)$ | | = 73.76 [°] | |
| <hr/> | | | | |
| Bolt hole diameter | bolt dia $d_b = 0.750$ [in] | | bolt hole dia $d_{bh} = 0.813$ [in] | AISC 14 th B4.3b |
| Bolt hole ver. dimension | $d_v =$ | | = 0.813 [in] | |
| Bolt hole hor. dimension | $d_h =$ | | = 0.813 [in] | |
| Bolt center to bolt hole edge dist | $d_c = 0.5 d_{bh}$ | | = 0.406 [in] | |
| <hr/> | | | | |
| Bolt no in ver & hor direction | Bolt Row $n_v = 3$ | | Bolt Col $n_h = 2$ | |
| Bolt spacing | ver $s_v = 3.000$ [in] | | hor $s_h = 4.000$ [in] | |
| Bolt edge distance | ver $e_v = 10.425$ [in] | | hor $e_h = 1.375$ [in] | |
| <hr/> | | | | |
| Bolt clear dist - bot right corner bolt | $L_{cA} = \min\left(\frac{e_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$ | | = 4.510 [in] | |
| Bolt clear dist - right side edge bolt | $L_{cB} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$ | | = 2.295 [in] | |
| Bolt clear dist - bot side edge bolt | $L_{cC} = \min\left(\frac{e_v}{\sin \theta}, \frac{s_h - 0.5d_v}{\cos \theta}\right) - d_c$ | | = 10.452 [in] | |
| Bolt clear dist - inner edge bolt | $L_{cD} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{s_h - 0.5d_v}{\cos \theta}\right) - d_c$ | | = 2.295 [in] | |
| Single Bolt Shear Strength | | | | |
| <hr/> | | | | |
| Bolt shear stress | bolt grade = A325-N | | $F_{nv} = 54.0$ [ksi] | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | | bolt area $A_b = 0.442$ [in ²] | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | | = 23.86 [kips] | AISC 14 th Eq J3-1 |
| <hr/> | | | | |
| Bolt bearing on plate | thick $t = 0.375$ [in] | | tensile $F_u = 65.0$ [ksi] | |
| Bolt bearing strength | $R_{n-br} = 3.0 d_b t F_u$ | | = 54.84 [kips] | AISC 14 th Eq J3-6b |
| <hr/> | | | | |
| Type A - Bolt Group Bottom Right Corner Bolt | | | | |
| Number of bolt | $n_A = 1$ | | | |
| Bolt tear out strength | $R_{n-tA} = 1.5 L_{cA} t F_u$ | | = 164.90 [kips] | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nA} = \min(R_{n-tA}, R_{n-br}, R_{n-bolt})$ | | = 23.86 [kips] | |
| <hr/> | | | | |
| Type B - Bolt Group Right Side Edge Bolt | | | | |
| Number of bolt | $n_B = 2$ | | | |
| Bolt tear out strength | $R_{n-tB} = 1.5 L_{cB} t F_u$ | | = 83.92 [kips] | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nB} = \min(R_{n-tB}, R_{n-br}, R_{n-bolt})$ | | = 23.86 [kips] | |
| <hr/> | | | | |
| Type C - Bolt Group Bottom Side Edge Bolt | | | | |
| Number of bolt | $n_C = 1$ | | | |
| Bolt tear out strength | $R_{n-tC} = 1.5 L_{cC} t F_u$ | | = 382.15 [kips] | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nC} = \min(R_{n-tC}, R_{n-br}, R_{n-bolt})$ | | = 23.86 [kips] | |
| <hr/> | | | | |
| Type D - Bolt Group Inner Edge Bolt | | | | |
| Number of bolt | $n_D = 2$ | | | |
| Bolt tear out strength | $R_{n-tD} = 1.5 L_{cD} t F_u$ | | = 83.92 [kips] | AISC 14 th Eq J3-6b |

| End Plate - Bolt Bearing on Column Web - Vy Vz Combined | | ratio = 89.39 / 107.35 | = 0.83 | PASS |
|--|--|--|--------|----------------------------------|
| The bolt group is oriented so that the shear V_y is in ver. direction and the shear V_z is in hor. direction | | | | |
| Bolt group forces | shear $V_y = 85.82$ [kips] | shear $V_z = 25.00$ [kips] | | |
| Bolt group resultant force | $R = (V_y^2 + V_z^2)^{0.5}$ | = 89.39 [kips] | | |
| Resultant force/hor line load angle | $\theta = \tan^{-1}(V_y / V_z)$ | = 73.76 [°] | | |
| <hr/> | | | | |
| Bolt hole diameter | bolt dia $d_b = 0.750$ [in] | bolt hole dia $d_{bh} = 0.813$ [in] | | AISC 14 th B4.3b |
| Bolt hole ver. dimension | $d_v =$ | = 0.813 [in] | | |
| Bolt hole hor. dimension | $d_h =$ | = 0.813 [in] | | |
| Bolt center to bolt hole edge dist | $d_c = 0.5 d_{bh}$ | = 0.406 [in] | | |
| <hr/> | | | | |
| Bolt no in ver & hor direction | Bolt Row $n_v = 3$ | Bolt Col $n_h = 2$ | | |
| Bolt spacing | ver $s_v = 3.000$ [in] | hor $s_h = 4.000$ [in] | | |
| Bolt edge distance | ver $e_v = 10.425$ [in] | hor $e_h = 1.375$ [in] | | |
| <hr/> | | | | |
| Bolt clear dist - bot right corner bolt | $L_{cA} = \min\left(\frac{e_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$ | = 4.510 [in] | | |
| Bolt clear dist - right side edge bolt | $L_{cB} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$ | = 2.295 [in] | | |
| Bolt clear dist - bot side edge bolt | $L_{cC} = \min\left(\frac{e_v}{\sin \theta}, \frac{s_h - 0.5d_v}{\cos \theta}\right) - d_c$ | = 10.452 [in] | | |
| Bolt clear dist - inner edge bolt | $L_{cD} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{s_h - 0.5d_v}{\cos \theta}\right) - d_c$ | = 2.295 [in] | | |
| <hr/> | | | | |
| Single Bolt Shear Strength | | | | |
| <hr/> | | | | |
| Bolt shear stress | bolt grade = A325-N | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Single bolt shear strength | $R_{n-bolt} = F_{nv} A_b$ | = 23.86 [kips] | | AISC 14 th Eq J3-1 |
| <hr/> | | | | |
| Bolt bearing on plate | thick $t = 0.295$ [in] | tensile $F_u = 65.0$ [ksi] | | |
| Bolt bearing strength | $R_{n-br} = 3.0 d_b t F_u$ | = 43.14 [kips] | | AISC 14 th Eq J3-6b |
| <hr/> | | | | |
| Type A - Bolt Group Bottom Right Corner Bolt | | | | |
| Number of bolt | $n_A = 1$ | | | |
| Bolt tear out strength | $R_{n-tA} = 1.5 L_{cA} t F_u$ | = 129.72 [kips] | | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nA} = \min(R_{n-tA}, R_{n-br}, R_{n-bolt})$ | = 23.86 [kips] | | |
| <hr/> | | | | |
| Type B - Bolt Group Right Side Edge Bolt | | | | |
| Number of bolt | $n_B = 2$ | | | |
| Bolt tear out strength | $R_{n-tB} = 1.5 L_{cB} t F_u$ | = 66.02 [kips] | | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nB} = \min(R_{n-tB}, R_{n-br}, R_{n-bolt})$ | = 23.86 [kips] | | |
| <hr/> | | | | |
| Type C - Bolt Group Bottom Side Edge Bolt | | | | |
| Number of bolt | $n_C = 1$ | | | |
| Bolt tear out strength | $R_{n-tC} = 1.5 L_{cC} t F_u$ | = 300.63 [kips] | | AISC 14 th Eq J3-6b |
| Bolt bearing strength | $R_{nC} = \min(R_{n-tC}, R_{n-br}, R_{n-bolt})$ | = 23.86 [kips] | | |
| <hr/> | | | | |
| Type D - Bolt Group Inner Edge Bolt | | | | |
| Number of bolt | $n_D = 2$ | | | |
| Bolt tear out strength | $R_{n-tD} = 1.5 L_{cD} t F_u$ | = 66.02 [kips] | | AISC 14 th Eq J3-6b |

| End Plate - Shear in Vy - Block Shear - Center Strip | | ratio = 85.82 / 334.30 | = 0.26 | PASS |
|---|--|--------------------------------|--------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 3$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 10.425$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 12.319 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 10.678 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 1.172 [in ²] | | |
| Block shear strength required | $V_u =$ | = 85.82 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 445.73 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 334.30 [kips] | | |
| | ratio = 0.26 | > V_u | OK | |

| End Plate - Shear in Vy - Block Shear - 2-Side Strip | | ratio = 85.82 / 311.45 | = 0.28 | PASS |
|--|--|--------------------------------|--------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 2$ | $n_h = 3$ | | |
| Bolt spacing in ver & hor dir | $s_v = 4.000$ [in] | $s_h = 3.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 1.375$ [in] | $e_h = 10.425$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 12.319 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 10.678 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 0.703 [in ²] | | |
| Block shear strength required | $V_u =$ | = 85.82 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 415.27 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 311.45 [kips] | | |
| | ratio = 0.28 | > V_u | OK | |

| End Plate - Shear in Vz - Block Shear - Center Strip | | ratio = 25.00 / 166.82 | = 0.15 | PASS |
|---|--|--------------------------------|--------|----------------------------------|
| Plate Block Shear - Center Strip | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 3$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 4.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 10.425$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 4.031 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 3.047 [in ²] | | |
| Net area subject to tension when sheared out by center strip | $A_{nt} = (n_v - 1) (s_v - d_h) t_p$ | = 1.594 [in ²] | | |
| Block shear strength required | $V_u =$ | = 25.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 222.42 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 166.82 [kips] | | |
| | ratio = 0.15 | > V_u | OK | |

| End Plate - Shear in Vz - Block Shear - 2-Side Strip | | ratio = 25.00 / 454.29 | = 0.06 | PASS |
|--|--|--------------------------------|--------|----------------------------------|
| Plate Block Shear - 2 Side Strips | | | | |
| Bolt hole diameter | bolt dia $d_b = 3/4$ [in] | bolt hole dia $d_h = 7/8$ [in] | | AISC 14 th B4.3b |
| Plate thickness | $t_p = 0.375$ [in] | | | |
| Plate strength | $F_y = 50.0$ [ksi] | $F_u = 65.0$ [ksi] | | |
| Bolt no in ver & hor dir | $n_v = 3$ | $n_h = 2$ | | |
| Bolt spacing in ver & hor dir | $s_v = 3.000$ [in] | $s_h = 4.000$ [in] | | |
| Bolt edge dist in ver & hor dir | $e_v = 10.425$ [in] | $e_h = 1.375$ [in] | | |
| Gross area subject to shear | $A_{gv} = [(n_h - 1) s_h + e_h] t_p \times 2$ | = 4.031 [in ²] | | |
| Net area subject to shear | $A_{nv} = A_{gv} - [(n_h - 1) + 0.5] d_h t_p \times 2$ | = 3.047 [in ²] | | |
| Net area subject to tension when sheared out by 2 side strips | $A_{nt} = (e_v - 0.5 d_h) t_p \times 2$ | = 7.491 [in ²] | | |
| Block shear strength required | $V_u =$ | = 25.00 [kips] | | |
| Uniform tension stress factor | $U_{bs} = 1.00$ | | | AISC 14 th Fig C-J4.2 |
| Bolt shear resistance provided | $R_n = \min(0.6F_u A_{nv}, 0.6F_y A_{gv}) + U_{bs} F_u A_{nt}$ | = 605.72 [kips] | | AISC 14 th Eq J4-5 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J4-5 |
| | $\phi R_n =$ | = 454.29 [kips] | | |
| | ratio = 0.06 | > V_u | OK | |

| End Plate / Column Web - Bolt Shear | | ratio = 89.39 / 107.35 | = 0.83 | PASS |
|-------------------------------------|---------------------------------|--|-----------|----------------------------------|
| Bolt group forces | shear $V_y = 85.82$ [kips] | shear $V_z = 25.00$ [kips] | | |
| Shear resultant force | $R = (V_y^2 + V_z^2)^{0.5}$ | = 89.39 [kips] | | |
| Bolt shear stress | grade = A325-N | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Number of bolt carried shear | $n_s = 6.0$ | shear plane $m = 1$ | | |
| Bolt group eccentricity coefficient | $C_{ec} =$ | = 1.000 | | |
| Required shear strength | $V_u =$ | = 89.39 [kips] | | |
| Bolt shear strength | $R_n = F_{nv} A_b n_s m C_{ec}$ | = 143.14 [kips] | | AISC 14 th Eq J3-1 |
| Bolt resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq J3-1 |
| | $\phi R_n =$ | = 107.35 [kips] | | |
| | ratio = 0.83 | > V_u | OK | |

| Bolt Tensile Prying Action on End Plate | | ratio = 2.58 / 7.32 | = 0.35 | PASS |
|---|---|--|-----------|----------------------------------|
| Bolt group forces | shear V = 89.39 [kips] | axial P = -15.50 [kips] | | |
| Single Bolt Tensile Capacity Without Considering Prying | | | | |
| Bolt grade | grade = A325-N | | | |
| Nominal tensile/shear stress | $F_{nt} = 90.0$ [ksi] | $F_{nv} = 54.0$ [ksi] | | AISC 14 th Table J3.2 |
| | bolt dia $d_b = 0.750$ [in] | bolt area $A_b = 0.442$ [in ²] | | |
| Bolt group shear force | shear V = 89.39 [kips] | no of bolt n = 6 | | |
| Shear stress required | $f_{rv} = V / (n A_b)$ | = 33.72 [ksi] | | |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3.7 |
| Modified nominal tensile stress | $F'_{nt} = 1.3 F_{nt} - \frac{F_{nt}}{\phi F_{nv}} f_{rv} \leq F_{nt}$ | = 42.06 [ksi] | | AISC 14 th Eq J3-3a |
| Bolt nominal tensile strength | $r_n = F'_{nt} A_b$ | = 18.58 [kips] | | AISC 14 th Eq J3-1 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th J3.6 |
| Single bolt tensile capacity | $\phi r_n =$ | = 13.94 [kips] | | |
| Single Bolt Tensile Capacity After Considering Prying | | | | |
| End plate | width w = 6.750 [in] | bolt gage g = 4.000 [in] | | |
| | web $t_w = 0.335$ [in] | | | |
| Dist from bolt center to plate edge | a = 0.5 (w - g) | = 1.375 [in] | | |
| | $a' = a + 0.5 d_b \leq (1.25 b + 0.5 d_b)$ | = 1.750 [in] | | AISC 14 th Eq 9-27 |
| Bolt hole diameter | bolt dia $d_b = 0.750$ [in] | bolt hole dia $d_h = 0.813$ [in] | | AISC 14 th B4.3b |
| Dist from bolt center to face of web | b = 0.5(g - t_w) | = 1.833 [in] | | |
| | b' = b - 0.5 d_b | = 1.458 [in] | | AISC 14 th Eq 9-21 |
| Bolt pitch spacing | $s_v = 3.000$ | | | |
| Bolt tributary length | $p = s_v$ $p \leq 2b$ and $p \leq s_v$ | = 3.000 [in] | | AISC 14 th Page 9-11 |
| | $\rho = b' / a'$ | = 0.833 | | AISC 14 th Eq 9-26 |
| | $\delta = 1 - d_h / p$ | = 0.729 | | AISC 14 th Eq 9-24 |
| Tensile capacity per bolt before considering prying | B = from calc shown in above section | = 13.94 [kips] | | |
| Resistance factor-LRFD | $\phi = 0.90$ | | | AISC 14 th Page 9-10 |
| End plate thickness | t = 0.375 [in] | tensile $F_u = 65.0$ [ksi] | | |
| Plate thickness req'd to develop bolt tensile capacity without prying | $t_c = \left(\frac{4 B b'}{\phi p F_u} \right)^{0.5}$ | = 0.680 [in] | | AISC 14 th Eq 9-30a |
| | $\alpha' = \frac{1}{\delta (1 + \rho)} \left[\left(\frac{t_c}{t} \right)^2 - 1 \right]$ | = 1.715 | | AISC 14 th Eq 9-35 |
| when $\alpha' > 1$ | $Q = \left(\frac{t}{t_c} \right)^2 (1 + \delta)$ | = 0.525 | | AISC 14 th Eq 9-34 |
| Bolt tensile force per bolt in demand | T = from calc shown below | = 2.58 [kips] | | |
| Tensile strength per bolt after considering prying | $\phi r_n = B \times Q$ | = 7.32 [kips] | | AISC 14 th Eq 9-31 |
| | ratio = 0.35 | > T | OK | |
| Calculate Max Single Bolt Tensile Load | | | | |
| Bolt group force | axial P = 15.50 [kips] | | | |
| Bolt number | Bolt Row $n_h = 2$ | Bolt Col $n_v = 3$ | | |
| Bolt tensile force per bolt | $T = P / (n_v n_h)$ | = 2.58 [kips] | | |

| Beam Flange Weld Strength | | ratio = 2.53 / 16.82 | = 0.15 | PASS |
|--|---|--------------------------------|--------------------------|---------------------------------|
| Assume all axial tensile force P carried by flange weld | | | | |
| Beam section W12X45 | $b_{fb} = 8.050$ [in] | $k_{1b} = 0.938$ [in] | | |
| Fillet weld length - double fillet | $L = [b_{fb} + (b_{fb} - 2k_{1b})] / 2$ as dbl fillet | | = 5.812 [in] | |
| Weld Group Forces | | | | |
| | shear $V = 12.50$ [kips] | axial $P = -7.75$ [kips] | in tension | |
| Beam flg-end plate weld length | $L =$ | | = 5.812 [in] | |
| Beam flg-end plate fillet weld size | $w =$ | | = 0.375 [in] | |
| Combined Weld Stress | | | | |
| Weld stress from axial force | $f_a = P / L$ | | = -1.333 [kip/in] | in tension |
| Weld stress from shear force | $f_v = V / L$ | | = 2.151 [kip/in] | |
| Weld stress combined - max | $f_{max} = (f_a^2 + f_v^2)^{0.5}$ | | = 2.531 [kip/in] | AISC 14 th Eq 8-11 |
| Weld stress load angle | $\theta = \tan^{-1} \left(\frac{f_a}{f_v} \right)$ | | = 31.8 [°] | |
| Fillet Weld Strength Calc | | | | |
| Fillet weld leg size | $w = \frac{3}{8}$ [in] | load angle $\theta = 31.8$ [°] | | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | strength coeff $C_1 = 1.00$ | | AISC 14 th Table 8-3 |
| Number of weld line | $n = 2$ for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | | = 1.19 | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | | = 26.530 [kip/in] | AISC 14 th Eq 8-1 |
| Base metal - beam flange | thickness $t = 0.575$ [in] | tensile $F_u = 65.0$ [ksi] | | |
| Base metal - beam flange is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked | | | | |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | | = 22.425 [kip/in] | AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | | = 22.425 [kip/in] | AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | | = 16.819 [kip/in] | |
| | ratio = 0.15 | | > f_{max} | OK |

| Beam Web Weld Strength | | ratio = 85.82 / 91.62 | = 0.94 | PASS |
|--|---|-----------------------------|---------------|--|
| Assume tensile force carried by flange weld and shear force carried by web weld, so there will be no combined weld tensile/shear stress required | | | | |
| Web weld shear force required | $V_u =$ from gusset interface force calc | = | 85.82 | [kips] |
| Beam section W12X45 | $d_b = 12.100$ [in] | $k_b = 1.375$ | [in] | |
| Fillet weld length on beam web | $L = d_b - 2 k_b$ | = | 9.350 | [in] |
| Fillet Weld Strength Check | | | | |
| Fillet weld leg size | $w = 3/8$ [in] | load angle $\theta = 0.0$ | [°] | |
| Electrode strength | $F_{EXX} = 70.0$ [ksi] | strength coeff $C_1 = 1.00$ | | AISC 14 th Table 8-3 |
| Number of weld line | $n = 2$ for double fillet | | | |
| Load angle coefficient | $C_2 = (1 + 0.5 \sin^{1.5} \theta)$ | = | 1.00 | AISC 14 th Page 8-9 |
| Fillet weld shear strength | $R_{n-w} = 0.6 (C_1 \times 70 \text{ ksi}) 0.707 w n C_2$ | = | 22.271 | [kip/in] AISC 14 th Eq 8-1 |
| Base metal - beam web | thickness $t = 0.335$ [in] | tensile $F_u = 65.0$ | [ksi] | |
| Base metal - beam web is in shear, <u>shear</u> rupture as per AISC 14 th Eq J4-4 is checked AISC 14 th J2.4 | | | | |
| Base metal shear rupture | $R_{n-b} = 0.6 F_u t$ | = | 13.065 | [kip/in] AISC 14 th Eq J4-4 |
| Double fillet linear shear strength | $R_n = \min (R_{n-w}, R_{n-b})$ | = | 13.065 | [kip/in] AISC 14 th Eq 9-2 |
| Resistance factor-LRFD | $\phi = 0.75$ | | | AISC 14 th Eq 8-1 |
| | $\phi R_n =$ | = | 9.799 | [kip/in] |
| Shear resistance required | $V_u =$ | = | 85.82 | [kips] |
| Fillet weld length - double fillet | $L =$ | = | 9.350 | [in] |
| Shear resistance provided | $\phi F_n = \phi R_n \times L$ | = | 91.62 | [kips] |
| | ratio = 0.94 | > | V_u | OK |