

Beam to Girder

Clip Angle Shear Connection

Code=AISC 360-10 LRFD

**Result Summary**



geometries & weld limitations = **PASS**

limit states max ratio = **1.23 FAIL**

Sketch

Shear Connection

Code=AISC 360-10 LRFD

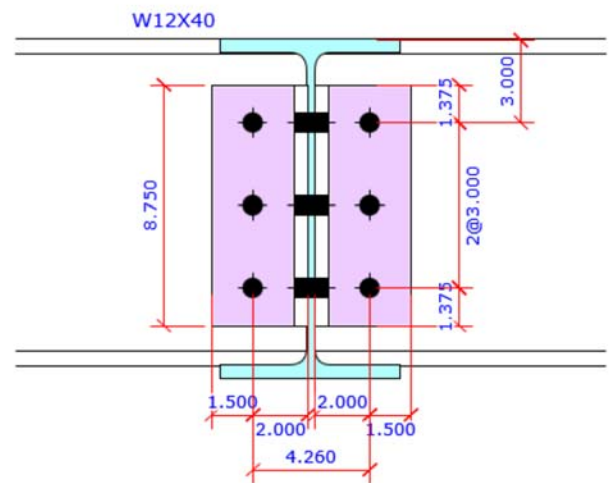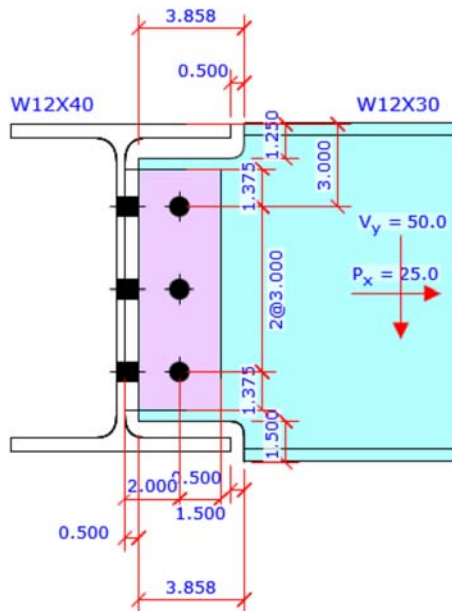

**Members & Components Summary**

Member

Shear Connection

Code=AISC 360-10 LRFD

Geometry Restriction Checks - Clip Angle to Beam				PASS
<b>Min Bolt Edge Distance - Clip Angle to Beam</b>				
Bolt diameter	$d_b =$	= 0.750	[in]	
Min edge distance allowed	$L_{e-min} =$	= 1.000	[in]	AISC 14 <sup>th</sup> Table J3.4
Min edge distance in Clip Angle to Beam	$L_e =$	= 1.375	[in]	
		> $L_{e-min}$		OK
<b>Min Bolt Spacing - Clip Angle to Beam</b>				
Bolt diameter	$d_b =$	= 0.750	[in]	
Min bolt spacing allowed	$L_{s-min} = 2.667 d_b$	= 2.000	[in]	AISC 14 <sup>th</sup> J3.3
Min Bolt spacing in Clip Angle to Beam	$L_s =$	= 3.000	[in]	
		> $L_{s-min}$		OK

Geometry Restriction Checks - Clip Angle to Girder				PASS
<b>Min Bolt Edge Distance - Clip Angle to Girder Web</b>				
Bolt diameter	$d_b =$	= 0.750	[in]	
Min edge distance allowed	$L_{e-min} =$	= 1.000	[in]	AISC 14 <sup>th</sup> Table J3.4
Min edge distance in Clip Angle to Girder Web	$L_e =$	= 1.375	[in]	
		> $L_{e-min}$		OK
<b>Min Bolt Spacing - Clip Angle to Girder Web</b>				
Bolt diameter	$d_b =$	= 0.750	[in]	
Min bolt spacing allowed	$L_{s-min} = 2.667 d_b$	= 2.000	[in]	AISC 14 <sup>th</sup> J3.3
Min Bolt spacing in Clip Angle to Girder Web	$L_s =$	= 3.000	[in]	
		> $L_{s-min}$		OK

W Shape Beam - Tensile Yield				ratio = 25.00 / 111.74 = 0.22	PASS
Gross area subject to tension	$A_g =$	= 2.483	[in <sup>2</sup> ]		
Steel yield strength	$F_y =$	= 50.0	[ksi]		
Tensile force required	$P_u =$	= 25.00	[kips]		
Tensile yielding strength	$R_n = F_y A_g$	= 124.15	[kips]		AISC 14 <sup>th</sup> Eq D2-1
Resistance factor-LRFD	$\phi = 0.90$				AISC 14 <sup>th</sup> D2 (a)
	$\phi R_n =$	= 111.74	[kips]		AISC 14 <sup>th</sup> Eq D2-1
	ratio = 0.22	> $P_u$			OK

<b>W Shape Beam - Tensile Rupture</b>		ratio = 25.00 / 87.77	= 0.28	<b>PASS</b>
W beam section	= W12X30			
	d = 12.300 [in]	b <sub>f</sub> = 6.520 [in]		
	t <sub>f</sub> = 0.440 [in]	t <sub>w</sub> = 0.260 [in]		
	A <sub>g</sub> = 2.483 [in <sup>2</sup> ]			
Bolt hole diameter	bolt dia d <sub>b</sub> = 3/4 [in]	bolt hole dia d <sub>n</sub> = 7/8 [in]		AISC 14 <sup>th</sup> B4.3b
Number of bolt row	n = 3			
W section net area	A <sub>n</sub> = A <sub>g</sub> - n d <sub>h</sub> t <sub>w</sub>	= 1.801 [in <sup>2</sup> ]		
Shear lag factor	U =	= 1.000		AISC 14 <sup>th</sup> D3
Tensile force required	P <sub>u</sub> =	= 25.00 [kips]		
Tensile effective net area	A <sub>e</sub> = A <sub>n</sub> U	= 1.801 [in <sup>2</sup> ]		
Plate tensile strength	F <sub>u</sub> =	= 65.0 [ksi]		
Tensile rupture strength	R <sub>n</sub> = F <sub>u</sub> A <sub>e</sub>	= 117.03 [kips]		AISC 14 <sup>th</sup> Eq D2-2
Resistance factor-LRFD	φ = 0.75			AISC 14 <sup>th</sup> D2 (b)
	φ R <sub>n</sub> =	= 87.77 [kips]		AISC 14 <sup>th</sup> Eq D2-2
	ratio = 0.28	> P <sub>u</sub>	<b>OK</b>	

<b>Beam Web - Shear Yielding</b>		ratio = 50.00 / 74.49	= 0.67	<b>PASS</b>
<b>Plate Shear Yielding Check</b>				
Plate size	width b <sub>p</sub> = 9.550 [in]	thickness t <sub>p</sub> = 0.260 [in]		
Plate yield strength	F <sub>y</sub> = 50.0 [ksi]			
Plate gross area in shear	A <sub>gv</sub> = b <sub>p</sub> t <sub>p</sub>	= 2.483 [in <sup>2</sup> ]		
Shear force required	V <sub>u</sub> =	= 50.00 [kips]		
Plate shear yielding strength	R <sub>n</sub> = 0.6 F <sub>y</sub> A <sub>gv</sub>	= 74.49 [kips]		AISC 14 <sup>th</sup> Eq J4-3
Resistance factor-LRFD	φ = 1.00			AISC 14 <sup>th</sup> Eq J4-3
	φ R <sub>n</sub> =	= 74.49 [kips]		
	ratio = 0.67	> V <sub>u</sub>	<b>OK</b>	

<b>Beam Web - Shear Rupture</b>		ratio = 50.00 / 52.66	= 0.95	<b>PASS</b>
<b>Plate Shear Rupture Check</b>				
Bolt hole diameter	bolt dia d <sub>b</sub> = 3/4 [in]	bolt hole dia d <sub>n</sub> = 7/8 [in]		AISC 14 <sup>th</sup> B4.3b
Number of bolt	n = 3			
Plate size	width b <sub>p</sub> = 9.550 [in]	thickness t <sub>p</sub> = 0.260 [in]		
Plate tensile strength	F <sub>u</sub> = 65.0 [ksi]			
Plate net area in shear	A <sub>nv</sub> = ( b <sub>p</sub> - n d <sub>n</sub> ) t <sub>p</sub>	= 1.801 [in <sup>2</sup> ]		
Shear force required	V <sub>u</sub> =	= 50.00 [kips]		
Plate shear rupture strength	R <sub>n</sub> = 0.6 F <sub>u</sub> A <sub>nv</sub>	= 70.22 [kips]		AISC 14 <sup>th</sup> Eq J4-4
Resistance factor-LRFD	φ = 0.75			AISC 14 <sup>th</sup> Eq J4-4
	φ R <sub>n</sub> =	= 52.66 [kips]		
	ratio = 0.95	> V <sub>u</sub>	<b>OK</b>	

<b>Beam Web - Bolt Bearing on Beam Web</b>		ratio = 55.90 / 85.56	= 0.65	<b>PASS</b>
The bolt group is oriented so that the shear force V is in ver. direction and the axial force P is in hor. direction				
Bolt group forces	shear V = 50.00 [kips]	axial P = -25.00 [kips]		
Bolt group resultant force	$R = (V^2 + P^2)^{0.5}$	= 55.90 [kips]		
Resultant force/hor line load angle	$\theta = \tan^{-1}(V/P)$	= 63.43 [°]		
<hr/>				
Bolt hole diameter	bolt dia $d_b = 0.750$ [in]	bolt hole dia $d_{bh} = 0.813$ [in]		AISC 14 <sup>th</sup> B4.3b
Bolt hole ver. dimension	$d_v =$	= 0.813 [in]		
Bolt hole hor. dimension	$d_h =$	= 0.813 [in]		
Bolt center to bolt hole edge dist	$d_c = 0.5 d_{bh}$	= 0.406 [in]		
<hr/>				
Bolt no in ver & hor direction	Bolt Row $n_v = 3$	Bolt Col $n_h = 1$		
Bolt spacing	ver $s_v = 3.000$ [in]			
Bolt edge distance	ver $e_v = 1.750$ [in]	hor $e_h = 1.500$ [in]		
<hr/>				
Bolt clear dist - bot right corner bolt	$L_{cA} = \min\left(\frac{e_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$	= 1.550 [in]		
Bolt clear dist - right side edge bolt	$L_{cB} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$	= 2.494 [in]		
<hr/>				
<b>Single Bolt Shear Strength</b>				
<hr/>				
Bolt shear stress	bolt grade = A325-N	$F_{nv} = 54.0$ [ksi]		AISC 14 <sup>th</sup> Table J3.2
	bolt dia $d_b = 0.750$ [in]	bolt area $A_b = 0.442$ [in <sup>2</sup> ]		
Single bolt shear strength	$R_{n-bolt} = 2 \times F_{nv} A_b$	= 47.71 [kips]		AISC 14 <sup>th</sup> Eq J3-1
<hr/>				
Bolt bearing on plate	thick $t = 0.260$ [in]	tensile $F_u = 65.0$ [ksi]		
Bolt bearing strength	$R_{n-br} = 3.0 d_b t F_u$	= 38.03 [kips]		AISC 14 <sup>th</sup> Eq J3-6b
<hr/>				
Type A - Bolt Group Bottom Right Corner Bolt				
Number of bolt	$n_A = 1$			
Bolt tear out strength	$R_{n-tA} = 1.5 L_{cA} t F_u$	= 39.30 [kips]		AISC 14 <sup>th</sup> Eq J3-6b
Bolt bearing strength	$R_{nA} = \min(R_{n-tA}, R_{n-br}, R_{n-bolt})$	= <b>38.03</b> [kips]		
<hr/>				
Type B - Bolt Group Right Side Edge Bolt				
Number of bolt	$n_B = 2$			
Bolt tear out strength	$R_{n-tB} = 1.5 L_{cB} t F_u$	= 63.21 [kips]		AISC 14 <sup>th</sup> Eq J3-6b
Bolt bearing strength	$R_{nB} = \min(R_{n-tB}, R_{n-br}, R_{n-bolt})$	= <b>38.03</b> [kips]		
<hr/>				
Bolt bearing strength for all bolts	$R_n = n_A R_{nA} + n_B R_{nB} + n_C R_{nC} + n_D R_{nD}$	= 114.08 [kips]		
Bolt resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> J3-10
	$\phi R_n =$	= <b>85.56</b> [kips]		
	ratio = <b>0.65</b>	> R	<b>OK</b>	

<b>Beam Web - Shear - Block Shear - 1-Side Strip</b>		ratio = 50.00 / 55.77	= 0.90	<b>PASS</b>
<b>Plate Block Shear - Side Strip</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 7/8$ [in]		AISC 14 <sup>th</sup> B4.3b
Plate thickness	$t_p = 0.260$ [in]			
Plate strength	$F_y = 50.0$ [ksi]	$F_u = 65.0$ [ksi]		
Bolt no in ver & hor dir	$n_v = 1$	$n_h = 3$		
Bolt spacing in hor dir	$s_h = 3.000$ [in]			
Bolt edge dist in ver & hor dir	$e_v = 1.500$ [in]	$e_h = 1.750$ [in]		
Gross area subject to shear	$A_{gv} = [ (n_h - 1) s_h + e_h ] t_p$	= 2.015 [in <sup>2</sup> ]		
Net area subject to shear	$A_{nv} = A_{gv} - [ (n_h - 1) + 0.5 ] d_h t_p$	= 1.446 [in <sup>2</sup> ]		
Net area subject to tension	$A_{nt} = ( e_v - 0.5 d_h ) t_p$	= 0.276 [in <sup>2</sup> ]		
Block shear strength required	$V_u =$	= 50.00 [kips]		
Uniform tension stress factor	$U_{bs} = 1.00$			AISC 14 <sup>th</sup> Fig C-J4.2
Bolt shear resistance provided	$R_n = \min ( 0.6F_u A_{nv} , 0.6F_y A_{gv} ) +$ $U_{bs} F_u A_{nt}$	= 74.36 [kips]		AISC 14 <sup>th</sup> Eq J4-5
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J4-5
	$\phi R_n =$	= 55.77 [kips]		
	ratio = 0.90	> $V_u$	<b>OK</b>	

<b>Beam Web - Axial Tearout - Block Shear - Center Strip</b>		ratio = 25.00 / 70.03	= 0.36	<b>PASS</b>
<b>Plate Block Shear - Center Strip</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 7/8$ [in]		AISC 14 <sup>th</sup> B4.3b
Plate thickness	$t_p = 0.260$ [in]			
Plate strength	$F_y = 50.0$ [ksi]	$F_u = 65.0$ [ksi]		
Bolt no in ver & hor dir	$n_v = 3$	$n_h = 1$		
Bolt spacing in ver & hor dir	$s_v = 3.000$ [in]	$s_h = 1.750$ [in]		
Bolt edge dist in ver & hor dir	$e_v = 3.000$ [in]	$e_h = 1.500$ [in]		
Gross area subject to shear	$A_{gv} = [ (n_h - 1) s_h + e_h ] t_p \times 2$	= 0.780 [in <sup>2</sup> ]		
Net area subject to shear	$A_{nv} = A_{gv} - [ (n_h - 1) + 0.5 ] d_h t_p \times 2$	= 0.553 [in <sup>2</sup> ]		
Net area subject to tension when sheared out by center strip	$A_{nt} = ( n_v - 1 ) ( s_v - d_h ) t_p$	= 1.105 [in <sup>2</sup> ]		
Block shear strength required	$V_u =$	= 25.00 [kips]		
Uniform tension stress factor	$U_{bs} = 1.00$			AISC 14 <sup>th</sup> Fig C-J4.2
Bolt shear resistance provided	$R_n = \min ( 0.6F_u A_{nv} , 0.6F_y A_{gv} ) +$ $U_{bs} F_u A_{nt}$	= 93.37 [kips]		AISC 14 <sup>th</sup> Eq J4-5
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J4-5
	$\phi R_n =$	= 70.03 [kips]		
	ratio = 0.36	> $V_u$	<b>OK</b>	

<b>Coped Beam - Flexural Rupture</b>		ratio = 50.00 / 44.21	= 1.13	<b>FAIL</b>
Beam section & cope side	sect = W12X30	cope side = double cope		
Beam top flange cope	depth $d_c = 1.250$ [in]	length $L_c = 3.858$ [in]		
Beam bottom flange cope	depth $d_c = 1.500$ [in]	length $L_c = 3.858$ [in]		
Beam section elastic modulus	$S_{net} =$	= 3.952 [in <sup>3</sup> ]		
Beam section tensile strength	$F_u =$	= 65.0 [ksi]		
Distance from face of cope to the point of inflection of beam	$e =$	= 4.358 [in] AISC 14 <sup>th</sup> Page 9-6		
Beam end shear force	$V_u =$	= 50.00 [kips]		
Beam end shear resistance	$R_n = F_u S_{net} / e$	= 58.95 [kips] AISC 14 <sup>th</sup> Eq 9-4		
Resistance factor-LRFD	$\phi = 0.75$	AISC 14 <sup>th</sup> Eq 9-4		
	$\phi R_n =$	= 44.21 [kips]		
	ratio = 1.13	< $V_u$ <b>NG</b>		

<b>Coped Beam - Local Web Buckling</b>		ratio = 50.00 / 40.81	= 1.23	<b>FAIL</b>
Beam section & cope side	sect = W12X30	cope side = double cope		
Beam top flange cope	depth $d_{ct} = 1.250$ [in]	length $L_{ct} = 3.858$ [in]		
Beam bottom flange cope	depth $d_{cb} = 1.500$ [in]	length $L_{cb} = 3.858$ [in]		
Beam section elastic modulus	$S_{net} =$	= 3.952 [in <sup>3</sup> ]		
Distance from face of cope to the point of inflection of beam	$e =$	= 4.358 [in] AISC 14 <sup>th</sup> Page 9-6		
Beam section	depth $d = 12.300$ [in]	web $t_w = 0.260$ [in]		
	$F_y = 50.0$ [ksi]	$E = 29000$ [ksi]		
	$f_d = 3.5 - 7.5 (d_{ct} / d)$	= 2.738 AISC 14 <sup>th</sup> Eq 9-13		
Reduced beam depth	$h_0 = d - d_{ct} - d_{cb}$	= 9.550 [in]		
Plate local buckling stress	$F_{cr} = 0.62 \pi E \frac{t_w^2}{L_{ct} h_0} f_d$	= 283.7 [ksi] AISC 14 <sup>th</sup> Eq 9-12		
	$F_{cr} = F_{cr} \leq F_y$	= 50.0 [ksi] AISC 14 <sup>th</sup> Eq 9-12		
Beam end shear force	$V_u =$	= 50.00 [kips]		
Beam end shear resistance	$R_n = F_{cr} S_{net} / e$	= 45.34 [kips] AISC 14 <sup>th</sup> Eq 9-6		
Resistance factor-LRFD	$\phi = 0.90$	AISC 14 <sup>th</sup> Eq 9-6		
	$\phi R_n =$	= 40.81 [kips]		
	ratio = 1.23	< $V_u$ <b>NG</b>		

<b>Clip Angle - Beam Side - Shear Yielding</b>		ratio = 25.00 / 131.25	= 0.19	<b>PASS</b>
<b>Plate Shear Yielding Check</b>				
Plate size	width $b_p = 8.750$ [in]	thickness $t_p = 0.500$ [in]		
Plate yield strength	$F_y = 50.0$ [ksi]			
Plate gross area in shear	$A_{gv} = b_p t_p$	= 4.375 [in <sup>2</sup> ]		
Shear force required	$V_u =$	= 25.00 [kips]		
Plate shear yielding strength	$R_n = 0.6 F_y A_{gv}$	= 131.25 [kips]		AISC 14 <sup>th</sup> Eq J4-3
Resistance factor-LRFD	$\phi = 1.00$			AISC 14 <sup>th</sup> Eq J4-3
	$\phi R_n =$	= 131.25 [kips]		
	ratio = 0.19	> $V_u$		<b>OK</b>
<b>Clip Angle - Beam Side - Shear Rupture</b>		ratio = 25.00 / 89.58	= 0.28	<b>PASS</b>
<b>Plate Shear Rupture Check</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 7/8$ [in]		AISC 14 <sup>th</sup> B4.3b
Number of bolt	$n = 3$			
Plate size	width $b_p = 8.750$ [in]	thickness $t_p = 0.500$ [in]		
Plate tensile strength	$F_u = 65.0$ [ksi]			
Plate net area in shear	$A_{nv} = (b_p - n d_h) t_p$	= 3.063 [in <sup>2</sup> ]		
Shear force required	$V_u =$	= 25.00 [kips]		
Plate shear rupture strength	$R_n = 0.6 F_u A_{nv}$	= 119.44 [kips]		AISC 14 <sup>th</sup> Eq J4-4
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J4-4
	$\phi R_n =$	= 89.58 [kips]		
	ratio = 0.28	> $V_u$		<b>OK</b>
<b>Clip Angle - Beam Side - Axial Tensile Yield</b>		ratio = 12.50 / 196.88	= 0.06	<b>PASS</b>
<b>Plate Tensile Yielding Check</b>				
Plate size	width $b_p = 8.750$ [in]	thickness $t_p = 0.500$ [in]		
Plate yield strength	$F_y = 50.0$ [ksi]			
Plate gross area in shear	$A_g = b_p t_p$	= 4.375 [in <sup>2</sup> ]		
Tensile force required	$P_u =$	= 12.50 [kips]		
Plate tensile yielding strength	$R_n = F_y A_g$	= 218.75 [kips]		AISC 14 <sup>th</sup> Eq J4-1
Resistance factor-LRFD	$\phi = 0.90$			AISC 14 <sup>th</sup> Eq J4-1
	$\phi R_n =$	= 196.88 [kips]		
	ratio = 0.06	> $P_u$		<b>OK</b>

Clip Angle - Beam Side - Axial Tensile Rupture		ratio = 12.50 / 149.30	= 0.08	PASS
<b>Plate Tensile Rupture Check</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 7/8$ [in]		AISC 14 <sup>th</sup> B4.3b
Number of bolt	$n = 3$			
Plate size	width $b_p = 8.750$ [in]	thickness $t_p = 0.500$ [in]		
Plate tensile strength	$F_u = 65.0$ [ksi]			
Plate net area in tension	$A_{nt} = (b_p - n d_h) t_p$	$= 3.063$ [in <sup>2</sup> ]		
Tensile force required	$P_u =$	$= 12.50$ [kips]		
Plate tensile rupture strength	$R_n = F_u A_{nt}$	$= 199.06$ [kips]		AISC 14 <sup>th</sup> Eq J4-2
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J4-2
	$\phi R_n =$	$= 149.30$ [kips]		AISC 14 <sup>th</sup> Eq J4-2
	ratio = <b>0.08</b>	$> P_u$	<b>OK</b>	



<b>Clip Angle - Beam Side - Bolt Bearing on Clip Angle</b>		ratio = 27.95 / 53.68	= 0.52	<b>PASS</b>
The bolt group is oriented so that the shear force V is in ver. direction and the axial force P is in hor. direction				
Bolt group forces	shear V = 50.00 [kips]		axial P = -25.00 [kips]	
Bolt group resultant force	$R = (V^2 + P^2)^{0.5}$		= 55.90 [kips]	
Each angle or plate takes	R = 0.50 x R		= <b>27.95</b> [kips]	
Resultant force/hor line load angle	$\theta = \tan^{-1}(V/P)$		= 63.43 [°]	
<hr/>				
Bolt hole diameter	bolt dia $d_b = 0.750$ [in]		bolt hole dia $d_{bh} = 0.813$ [in]	AISC 14 <sup>th</sup> B4.3b
Bolt hole ver. dimension	$d_v =$		= 0.813 [in]	
Bolt hole hor. dimension	$d_h =$		= 0.813 [in]	
Bolt center to bolt hole edge dist	$d_c = 0.5 d_{bh}$		= 0.406 [in]	
<hr/>				
Bolt no in ver & hor direction	Bolt Row $n_v = 3$		Bolt Col $n_h = 1$	
Bolt spacing	ver $s_v = 3.000$ [in]			
Bolt edge distance	ver $e_v = 1.375$ [in]		hor $e_h = 1.500$ [in]	
<hr/>				
Bolt clear dist - bot right corner bolt	$L_{CA} = \min\left(\frac{e_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$		= 1.131 [in]	
Bolt clear dist - right side edge bolt	$L_{CB} = \min\left(\frac{s_v - 0.5d_v}{\sin \theta}, \frac{e_h}{\cos \theta}\right) - d_c$		= 2.494 [in]	
<hr/>				
<b>Single Bolt Shear Strength</b>				
<hr/>				
Bolt shear stress	bolt grade = A325-N		$F_{nv} = 54.0$ [ksi]	AISC 14 <sup>th</sup> Table J3.2
	bolt dia $d_b = 0.750$ [in]		bolt area $A_b = 0.442$ [in <sup>2</sup> ]	
Single bolt shear strength	$R_{n-bolt} = F_{nv} A_b$		= 23.86 [kips]	AISC 14 <sup>th</sup> Eq J3-1
<hr/>				
Bolt bearing on plate	thick t = 0.500 [in]		tensile $F_u = 65.0$ [ksi]	
Bolt bearing strength	$R_{n-br} = 3.0 d_b t F_u$		= 73.13 [kips]	AISC 14 <sup>th</sup> Eq J3-6b
<hr/>				
Type A - Bolt Group Bottom Right Corner Bolt				
Number of bolt	$n_A = 1$			
Bolt tear out strength	$R_{n-tA} = 1.5 L_{CA} t F_u$		= 55.14 [kips]	AISC 14 <sup>th</sup> Eq J3-6b
Bolt bearing strength	$R_{nA} = \min(R_{n-tA}, R_{n-br}, R_{n-bolt})$		= <b>23.86</b> [kips]	
<hr/>				
Type B - Bolt Group Right Side Edge Bolt				
Number of bolt	$n_B = 2$			
Bolt tear out strength	$R_{n-tB} = 1.5 L_{CB} t F_u$		= 121.57 [kips]	AISC 14 <sup>th</sup> Eq J3-6b
Bolt bearing strength	$R_{nB} = \min(R_{n-tB}, R_{n-br}, R_{n-bolt})$		= <b>23.86</b> [kips]	
<hr/>				
Bolt bearing strength for all bolts	$R_n = n_A R_{nA} + n_B R_{nB} + n_C R_{nC} + n_D R_{nD}$		= 71.57 [kips]	
Bolt resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> J3-10
	$\phi R_n =$		= <b>53.68</b> [kips]	
	ratio = <b>0.52</b>		> R	<b>OK</b>

<b>Clip Angle - Beam Side - Block Shear - 1-Side Strip</b>		ratio = 25.00 / 101.77	= 0.25	<b>PASS</b>
<b>Plate Block Shear - Side Strip</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 7/8$ [in]		AISC 14 <sup>th</sup> B4.3b
Plate thickness	$t_p = 0.500$ [in]			
Plate strength	$F_y = 50.0$ [ksi]	$F_u = 65.0$ [ksi]		
Bolt no in ver & hor dir	$n_v = 1$	$n_h = 3$		
Bolt spacing in hor dir	$s_h = 3.000$ [in]			
Bolt edge dist in ver & hor dir	$e_v = 1.500$ [in]	$e_h = 1.375$ [in]		
Gross area subject to shear	$A_{gv} = [ (n_h - 1) s_h + e_h ] t_p$	= 3.688 [in <sup>2</sup> ]		
Net area subject to shear	$A_{nv} = A_{gv} - [ (n_h - 1) + 0.5 ] d_h t_p$	= 2.594 [in <sup>2</sup> ]		
Net area subject to tension	$A_{nt} = ( e_v - 0.5 d_h ) t_p$	= 0.531 [in <sup>2</sup> ]		
Block shear strength required	$V_u =$	= <b>25.00</b> [kips]		
Uniform tension stress factor	$U_{bs} = 1.00$			AISC 14 <sup>th</sup> Fig C-J4.2
Bolt shear resistance provided	$R_n = \min ( 0.6F_u A_{nv} , 0.6F_y A_{gv} ) + U_{bs} F_u A_{nt}$	= 135.69 [kips]		AISC 14 <sup>th</sup> Eq J4-5
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J4-5
	$\phi R_n =$	= <b>101.77</b> [kips]		
	ratio = <b>0.25</b>	> $V_u$	<b>OK</b>	

<b>Clip Angle - Beam Side-Axial Tearout - Block Shear - Center Strip</b>		ratio = 12.50 / 134.67	= 0.09	<b>PASS</b>
<b>Plate Block Shear - Center Strip</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 7/8$ [in]		AISC 14 <sup>th</sup> B4.3b
Plate thickness	$t_p = 0.500$ [in]			
Plate strength	$F_y = 50.0$ [ksi]	$F_u = 65.0$ [ksi]		
Bolt no in ver & hor dir	$n_v = 3$	$n_h = 1$		
Bolt spacing in ver & hor dir	$s_v = 3.000$ [in]	$s_h = 1.750$ [in]		
Bolt edge dist in ver & hor dir	$e_v = 1.375$ [in]	$e_h = 1.500$ [in]		
Gross area subject to shear	$A_{gv} = [ (n_h - 1) s_h + e_h ] t_p \times 2$	= 1.500 [in <sup>2</sup> ]		
Net area subject to shear	$A_{nv} = A_{gv} - [ (n_h - 1) + 0.5 ] d_h t_p \times 2$	= 1.063 [in <sup>2</sup> ]		
Net area subject to tension when sheared out by center strip	$A_{nt} = ( n_v - 1 ) ( s_v - d_h ) t_p$	= 2.125 [in <sup>2</sup> ]		
Block shear strength required	$V_u =$	= <b>12.50</b> [kips]		
Uniform tension stress factor	$U_{bs} = 1.00$			AISC 14 <sup>th</sup> Fig C-J4.2
Bolt shear resistance provided	$R_n = \min ( 0.6F_u A_{nv} , 0.6F_y A_{gv} ) + U_{bs} F_u A_{nt}$	= 179.56 [kips]		AISC 14 <sup>th</sup> Eq J4-5
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J4-5
	$\phi R_n =$	= <b>134.67</b> [kips]		
	ratio = <b>0.09</b>	> $V_u$	<b>OK</b>	

<b>Clip Angle - Beam Side - Block Shear - Shear/Tensile Interact</b>		ratio =	= 0.07	<b>PASS</b>
Shear block shear strength required	$V_u =$		= 25.00 [kips]	
Axial block shear strength required	$P_u =$		= 12.50 [kips]	
Shear block shear strength available	$\phi R_{nv} =$ from calc shown above		= 101.77 [kips]	
Axial block shear strength available	$\phi R_{nt} =$ from calc shown above		= 134.67 [kips]	
Block shear shear/tensile interaction	ratio = $\left(\frac{V_u}{\phi R_{nv}}\right)^2 + \left(\frac{P_u}{\phi R_{nt}}\right)^2$		= 0.07	AISC 14 <sup>th</sup> Eq 10-5
			< 1.0	<b>OK</b>

<b>Clip Angle - Girder Side - Shear Rupture</b>		ratio = 25.00 / 89.58	= 0.28	<b>PASS</b>
<b>Plate Shear Rupture Check</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 7/8$ [in]		AISC 14 <sup>th</sup> B4.3b
Number of bolt	$n = 3$			
Plate size	width $b_p = 8.750$ [in]	thickness $t_p = 0.500$ [in]		
Plate tensile strength	$F_u = 65.0$ [ksi]			
Plate net area in shear	$A_{nv} = (b_p - n d_h) t_p$		= 3.063 [in <sup>2</sup> ]	
Shear force required	$V_u =$		= 25.00 [kips]	
Plate shear rupture strength	$R_n = 0.6 F_u A_{nv}$		= 119.44 [kips]	AISC 14 <sup>th</sup> Eq J4-4
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J4-4
	$\phi R_n =$		= 89.58 [kips]	
	ratio = 0.28		> $V_u$	<b>OK</b>

Clip Angle - Girder Side - Bolt Bearing on Clip Angle		ratio = 25.00 / 53.68	= 0.47	PASS
<b>Single Bolt Shear Strength</b>				
Bolt shear stress	bolt grade = A325-N	$F_{nv} = 54.0$	[ksi]	AISC 14 <sup>th</sup> Table J3.2
	bolt dia $d_b = 0.750$	[in]	bolt area $A_b = 0.442$	[in <sup>2</sup> ]
Single bolt shear strength	$R_{n-bolt} = F_{nv} A_b$	= 23.86	[kips]	AISC 14 <sup>th</sup> Eq J3-1
<b>Bolt Bearing/TearOut Strength on Plate</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$	[in]	bolt hole dia $d_h = 13/16$	[in] AISC 14 <sup>th</sup> Table J3.3
Bolt spacing & edge distance	spacing $L_s = 3.000$	[in]	edge distance $L_e = 1.375$	[in]
Plate tensile strength	$F_u = 65.0$	[ksi]		
Plate thickness	$t = 0.500$	[in]		
<b>Interior Bolt</b>				
Bolt hole edge clear distance	$L_c = L_s - d_h$	= 2.188	[in]	
Bolt tear out/bearing strength	$R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$	= 73.13	[kips]	AISC 14 <sup>th</sup> Eq J3-6b
	= 106.64 $\leq$ 73.13			
Bolt strength at interior	$R_{n-in} = \min ( R_{n-t\&b-in}, R_{n-bolt} )$	= 23.86	[kips]	
<b>Edge Bolt</b>				
Bolt hole edge clear distance	$L_c = L_e - d_h / 2$	= 0.969	[in]	
Bolt tear out/bearing strength	$R_{n-t\&b-ed} = 1.5 L_c t F_u \leq 3.0 d_b t F_u$	= 47.23	[kips]	AISC 14 <sup>th</sup> Eq J3-6b
	= 47.23 $\leq$ 73.13			
Bolt strength at edge	$R_{n-ed} = \min ( R_{n-t\&b-ed}, R_{n-bolt} )$	= 23.86	[kips]	
Number of bolt	interior $n_{in} = 2$	edge $n_{ed} = 1$		
Bolt bearing strength for all bolts	$R_n = n_{in} R_{n-in} + n_{ed} R_{n-ed}$	= 71.57	[kips]	
Required shear strength	$V_u =$	= 25.00	[kips]	
Bolt resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> J3-10
	$\phi R_n =$	= 53.68	[kips]	
	ratio = 0.47	> $V_u$		OK

<b>Clip Angle - Girder Side - Block Shear - 1-Side Strip</b>		ratio = 25.00 / 101.77	= 0.25	<b>PASS</b>
<b>Plate Block Shear - Side Strip</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 7/8$ [in]		AISC 14 <sup>th</sup> B4.3b
Plate thickness	$t_p = 0.500$ [in]			
Plate strength	$F_y = 50.0$ [ksi]	$F_u = 65.0$ [ksi]		
Bolt no in ver & hor dir	$n_v = 1$	$n_h = 3$		
Bolt spacing in hor dir	$s_h = 3.000$ [in]			
Bolt edge dist in ver & hor dir	$e_v = 1.500$ [in]	$e_h = 1.375$ [in]		
Gross area subject to shear	$A_{gv} = [ (n_h - 1) s_h + e_h ] t_p$	= 3.688 [in <sup>2</sup> ]		
Net area subject to shear	$A_{nv} = A_{gv} - [ (n_h - 1) + 0.5 ] d_h t_p$	= 2.594 [in <sup>2</sup> ]		
Net area subject to tension	$A_{nt} = ( e_v - 0.5 d_h ) t_p$	= 0.531 [in <sup>2</sup> ]		
Block shear strength required	$V_u =$	= 25.00 [kips]		
Uniform tension stress factor	$U_{bs} = 1.00$			AISC 14 <sup>th</sup> Fig C-J4.2
Bolt shear resistance provided	$R_n = \min ( 0.6F_u A_{nv} , 0.6F_y A_{gv} ) + U_{bs} F_u A_{nt}$	= 135.69 [kips]		AISC 14 <sup>th</sup> Eq J4-5
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J4-5
	$\phi R_n =$	= 101.77 [kips]		
	ratio = 0.25	> $V_u$	<b>OK</b>	

<b>Clip Angle / Beam Web - Bolt Shear</b>		ratio = 55.90 / 107.35	= 0.52	<b>PASS</b>
Bolt group forces	shear $V = 50.00$ [kips]	axial $P = -25.00$ [kips]		
Bolt group resultant force	$R = ( V^2 + P^2 )^{0.5}$	= 55.90 [kips]		
Bolt shear stress	bolt grade = A325-N	$F_{nv} = 54.0$ [ksi]		AISC 14 <sup>th</sup> Table J3.2
	bolt dia $d_b = 0.750$ [in]	bolt area $A_b = 0.442$ [in <sup>2</sup> ]		
Number of bolt carried shear	$n_s = 3.0$	shear plane $m = 2$		
<b>Beam Side Bolt Group Eccentricity</b>				
Eccentricity in double angle connection can be neglected when bolt group has single vertical row of bolt and the distance from face of angle OSL to bolt group CG is less than 3 inch				AISC 14 <sup>th</sup> Page 10-8
Bolt group eccentricity coefficient	$C_{ec} =$	= 1.000		AISC 14 <sup>th</sup> Page 10-8
Required shear strength	$V_u =$	= 55.90 [kips]		
Bolt shear strength	$R_n = F_{nv} A_b n_s m C_{ec}$	= 143.14 [kips]		AISC 14 <sup>th</sup> Eq J3-1
Bolt resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J3-1
	$\phi R_n =$	= 107.35 [kips]		
	ratio = 0.52	> $V_u$	<b>OK</b>	

<b>Clip Angle / Girder - Bolt Shear</b>		ratio = 25.00 / 53.68	= 0.47	<b>PASS</b>
Bolt group forces	shear $V = 25.00$ [kips]	axial $P = 12.50$ [kips]		
Bolt shear stress	grade = A325-N	$F_{nv} = 54.0$ [ksi]		AISC 14 <sup>th</sup> Table J3.2
	bolt dia $d_b = 0.750$ [in]	bolt area $A_b = 0.442$ [in <sup>2</sup> ]		
Number of bolt carried shear	$n_s = 3.0$	shear plane $m = 1$		
Bolt group eccentricity coefficient	$C_{ec} =$	$= 1.000$		
Required shear strength	$V_u =$	$= 25.00$ [kips]		
Bolt shear strength	$R_n = F_{nv} A_b n_s m C_{ec}$	$= 71.57$ [kips]		AISC 14 <sup>th</sup> Eq J3-1
Bolt resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> Eq J3-1
	$\phi R_n =$	$= 53.68$ [kips]		
	ratio = 0.47	$> V_u$	<b>OK</b>	

<b>Clip Angle / Girder - Bolt Bearing on Girder</b>		ratio = 50.00 / 107.35	= 0.47	<b>PASS</b>
<b>Single Bolt Shear Strength</b>				
Bolt shear stress	bolt grade = A325-N	$F_{nv} = 54.0$ [ksi]		AISC 14 <sup>th</sup> Table J3.2
	bolt dia $d_b = 0.750$ [in]	bolt area $A_b = 0.442$ [in <sup>2</sup> ]		
Single bolt shear strength	$R_{n-bolt} = F_{nv} A_b$	$= 23.86$ [kips]		AISC 14 <sup>th</sup> Eq J3-1
<b>Bolt Bearing/TearOut Strength on Plate</b>				
Bolt hole diameter	bolt dia $d_b = 3/4$ [in]	bolt hole dia $d_h = 13/16$ [in]		AISC 14 <sup>th</sup> Table J3.3
Bolt spacing	spacing $L_s = 3.000$ [in]			
Plate tensile strength	$F_u = 65.0$ [ksi]			
Plate thickness	$t = 0.295$ [in]			
<b>Interior Bolt</b>				
Bolt hole edge clear distance	$L_c = L_s - d_h$	$= 2.188$ [in]		
Bolt tear out/bearing strength	$R_{n-t\&b-in} = 1.5 L_c t F_u \leq 3.0 d_b t m F_u$	$= 43.14$ [kips]		AISC 14 <sup>th</sup> Eq J3-6b
	$= 62.92 \leq 43.14$			
Bolt strength at interior	$R_{n-in} = \min ( R_{n-t\&b-in}, R_{n-bolt} )$	$= 23.86$ [kips]		
Number of bolt	interior $n_{in} = 6$			
Bolt bearing strength for all bolts	$R_n = n_{in} R_{n-in}$	$= 143.14$ [kips]		
Required shear strength	$V_u =$	$= 50.00$ [kips]		
Bolt resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> J3-10
	$\phi R_n =$	$= 107.35$ [kips]		
	ratio = 0.47	$> V_u$	<b>OK</b>	

<b>Clip Angle / Girder - Angle Leg Bending</b>		ratio = 1.11 / 2.67	= 0.42	<b>PASS</b>
Angle leg on beam	width $b = 8.750$ [in]	thickness $t = 0.500$ [in]		
	tensile $F_u = 65.0$ [ksi]	bolt gage $g = 2.000$ [in]		
Beam web thickness	$t_p = 0.260$ [in]			
The angle leg bending moment is derived based on the assumption that the 2L legs to form a single span $L=2d$ beam with both ends fixed and tensile point load $2P$ imposed at mid span of this beam, so the moment $M=(1/8) \times 2P \times 2d = 0.5 P d$				
1/2 beam span - distance from bolt center to gusset plate center	$d = g + 0.5 t_p$	= 2.130 [in]		
Axial tensile load on single angle	$P =$	= 12.50 [kips]		
Moment in demand	$M_r = 0.5 P d$	= 1.11 [kip-ft]		
Moment capacity	$M_n = ( t^2 b ) / 4 \times F_u$	= 2.96 [kip-ft]		AISC 14 <sup>th</sup> Eq 15-21
Resistance factor-LRFD	$\phi = 0.90$			AISC 14 <sup>th</sup> Eq 15-21
	$\phi M_n =$	= 2.67 [kip-ft]		
	ratio = 0.42	> $M_r$	<b>OK</b>	

<b>Bolt Tensile Prying Action on Clip Angle</b>		ratio = 4.17 / 13.35	= 0.31	PASS
For 2L clip angle, all loads to be x 0.5 for single angle				
Bolt group forces	shear V = 25.00 [kips]		axial P = -12.50 [kips]	
<b>Single Bolt Tensile Capacity Without Considering Prying</b>				
Bolt grade	grade = A325-N			
Nominal tensile/shear stress	$F_{nt} = 90.0$ [ksi]		$F_{nv} = 54.0$ [ksi]	AISC 14 <sup>th</sup> Table J3.2
	bolt dia $d_b = 0.750$ [in]		bolt area $A_b = 0.442$ [in <sup>2</sup> ]	
Bolt group shear force	shear V = 25.00 [kips]		no of bolt n = 3	
Shear stress required	$f_{rv} = V / (n A_b)$		= 18.86 [ksi]	
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> J3.7
Modified nominal tensile stress	$F'_{nt} = 1.3 F_{nt} - \frac{F_{nt}}{\phi F_{nv}} f_{rv} \leq F_{nt}$		= <b>75.08</b> [ksi]	AISC 14 <sup>th</sup> Eq J3-3a
Bolt normal tensile strength	$r_n = F'_{nt} A_b$		= 33.17 [kips]	AISC 14 <sup>th</sup> Eq J3-1
Resistance factor-LRFD	$\phi = 0.75$			AISC 14 <sup>th</sup> J3.6
Single bolt tensile capacity	$\phi r_n =$		= <b>24.88</b> [kips]	
<b>Single Bolt Tensile Capacity After Considering Prying</b>				
Clip angle	leg width L = 3.500 [in]		bolt gage g = 2.000 [in]	
	leg t = 0.500 [in]			
Dist from bolt center to leg edge	a = L - g		= 1.500 [in]	
	$a' = a + 0.5 d_b \leq (1.25 b + 0.5 d_b)$		= 1.875 [in]	AISC 14 <sup>th</sup> Eq 9-27
Bolt hole diameter	bolt dia $d_b = 0.750$ [in]		bolt hole dia $d_h = 0.813$ [in]	AISC 14 <sup>th</sup> B4.3b
Dist from bolt center to centerline of angle leg	b = g - 0.5 t		= 1.750 [in]	
	b' = b - 0.5 $d_b$		= 1.375 [in]	AISC 14 <sup>th</sup> Eq 9-21
Angle length	L = 8.750 [in]		Bolt Col $n_v = 3$	
Bolt spacing			$s_v = 3.000$	
Bolt tributary length	$p = L / n_v$ $p \leq 2b$ and $p \leq s_v$		= 2.917 [in]	AISC 14 <sup>th</sup> Page 9-11
	$\rho = b' / a'$		= 0.733	AISC 14 <sup>th</sup> Eq 9-26
	$\delta = 1 - d_h / p$		= 0.721	AISC 14 <sup>th</sup> Eq 9-24
Tensile capacity per bolt before considering prying	B = from calc shown in above section		= 24.88 [kips]	
Resistance factor-LRFD	$\phi = 0.90$			AISC 14 <sup>th</sup> Page 9-10
Clip angle leg thickness	t = 0.500 [in]		tensile $F_u = 65.0$ [ksi]	
Plate thickness req'd to develop bolt tensile capacity without prying	$t_c = \left( \frac{4 B b'}{\phi p F_u} \right)^{0.5}$		= 0.896 [in]	AISC 14 <sup>th</sup> Eq 9-30a
	$\alpha' = \frac{1}{\delta (1 + \rho)} \left[ \left( \frac{t_c}{t} \right)^2 - 1 \right]$		= 1.765	AISC 14 <sup>th</sup> Eq 9-35
when $\alpha' > 1$	$Q = \left( \frac{t}{t_c} \right)^2 (1 + \delta)$		= 0.537	AISC 14 <sup>th</sup> Eq 9-34
Bolt tensile force per bolt in demand	T = from calc shown below		= <b>4.17</b> [kips]	
Tensile strength per bolt after considering prying	$\phi r_n = B \times Q$		= <b>13.35</b> [kips]	AISC 14 <sup>th</sup> Eq 9-31
	ratio = <b>0.31</b>		> T	OK
<b>Calculate Max Single Bolt Tensile Load</b>				
For 2L clip angle, all loads to be x 0.5 for single angle				
Bolt group force	axial P = 12.50 [kips]			



